

Dipartimento di / Department of

SCIENZE DELL'AMBIENTE E DELLA TERRA - EARTH AND ENVIRONMENTAL SCIENCES

Dottorato di Ricerca Executive in / PhD Executive program SCIENZE CHIMICHE, ECOLOGICHE E AMBIENTALI – CHEMICAL, GEOLOGICAL AND ENVIRONMENTAL SCIENCES
Ciclo / Cycle XXXVI

Curriculum in SCIENZE GEOLOGICHE – GEOLOGICAL SCIENCES

Advances in the sustainability assessment of geotechnical ground improvement processes

Cognome / Surname PETTINAROLI

Nome / Name ANDREA MARIA ROMILDO

Matricola / Registration number

869524

Tutore / Tutor:

prof. Paolo Frattini

Tutor aziendale / Company Tutor

prof. Claudio Di Prisco

Supervisor:

prof. Maria Elena Collina

Co-Supervisor (1):

prof. Riccardo Castellanza

Co-Supervisor (2):

prof. Valeria Mezzanotte

Coordinatore / Coordinator:

prof. Marco Malusà

ANNO ACCADEMICO / ACADEMIC YEAR 2023/2024

Summary

Abstract.....	6
1 Introduction	7
1.1 The context and the objective	7
1.2 The case for geotechnics and ground improvement techniques.....	10
1.3 Goal of this research: a Three Phased Method for sustainability assessment of geotechnical works 11	
2 The EU regulatory framework as a point of reference	13
3 The international sustainability protocols dedicated to infrastructures	17
4 The state of the art for LCA and LCCA analyses in geotechnics.....	22
4.1 Life Cycle Thinking and Infrastructure	22
4.2 Life Cycle Assessment applied to Infrastructure.....	24
4.3 Life Cycle Cost Analysis (LCCA).....	26
4.4 The three levels of application of Life Cycle Assessment in Infrastructure	27
4.5 LCA and geotechnics.....	30
5 Sustainability indicators and green drivers in geotechnics: tailoring a combined method.....	32
5.1 Combining sustainability indicators with the EU technical screening criteria.....	32
5.2 The guidelines from the Italian Ministry for Sustainable Infrastructure.....	32
5.3 DNSH and Recovery and Resilience Plan	33
5.4 EU Regulation 2020/852 Objectives	34
Objective 6: Substantial contribution to the protection and restoration of biodiversity and ecosystems	37
5.5 Significant harm to environmental objectives.....	37
5.6 The Envision protocol in the light of measuring DNSH objectives	38
5.7 A dedicated assessment for ground improvement projects that fosters EU DNSH criteria through Envision	39
5.8 Correspondence between DNSH and ENVISION	39
6 A methodological approach to assess sustainability in geotechnical construction techniques	49
6.1 General view of the methodology	49
6.2 The case study: the analysis of three soil treatment ground improvement alternative strategies through the lenses of sustainability.....	50
7 Soil treatment techniques.	56
7.1 Soil treatment technologies usable for the pilot case.....	56
7.2 Permeation grouting (PE)	57
7.3 Jet grouting (JG).....	60
7.4 Artificial ground freezing (AGF)	64
8 The first phase of the method: Assessing sustainability qualitatively.....	70
8.1 Qualitative application of the framework and sustainability rating of the techniques.....	70

8.2	Performance comparison at the end of the first phase	76
9	The second phase of the sustainability assessment: quantitative evaluation through LCA analyses	79
9.1	The second phase	79
9.2	Impact frameworks and the choice for the analyses	79
9.3	The European Environmental Footprint framework.....	79
9.4	The software used for modelling and the implementation of the Environmental Footprint framework 82	
9.5	LCA analysis for ground improvement treatment using the permeation grouting technique	83
9.6	LCA analysis for ground improvement treatment using the single fluid jet grouting technique	86
9.7	LCA analysis input for ground improvement treatment using double fluid jet grouting.....	89
9.8	LCA analysis for ground improvement treatment using ground freezing with brine	91
9.9	LCA analysis for ground improvement treatment using ground freezing with nitrogen	94
9.10	The results for the second phase of the method	96
10	The third phase of the assessment method: the framework scoring refinement	103
10.1	Permeation grouting assessment refinement	104
10.2	Single fluid jet grouting assessment refinement.....	105
10.3	Double fluid jet grouting assessment refinement	105
10.4	Brine ground freezing assessment refinement	106
10.5	Nitrogen freezing ground assessment refinement	107
10.6	Final view of the sustainability performance following Envision and DNSH.....	108
11	Quantitative cost assessment through life cycle cost analysis	111
11.1	The cost perspective: Cradle to site LCCA of the case studies	111
11.2	Life cycle cost analysis for the case studies.....	111
11.3	Synthesis and comparison of the 5 cost impact analysis	113
12	Social Impact Assessment based on CO ₂ eq emissions based on the outputs of the LCA evaluations	116
12.1	The Social Cost of Greenhouse Gas Emissions	116
12.2	A remark on CO ₂ eq emissions	118
12.3	Social Impact of CO ₂ eq emissions evaluation based on the performed LCA.....	120
13	Results discussion and further perspectives and steps.....	122
13.1	The value of the proposed methodology.....	122
13.2	Perspectives for exploiting the LCA analysis for supporting the sustainability assessment of geotechnical works	124
13.3	Possible limitations of the method.	126
14	The practice of the soil treatment works and the proposed approach	127
14.1	Moving from the three phased method results	127
14.2	The energy as key-concept to explain the sustainability approach.....	127

14.3	The necessity to measure the technical performance of a sustainable soil treatment process: the role of the geotechnical laboratory	128
14.4	The permeation grouting and the Injection Tube System® device	131
14.5	The artificial ground freezing.....	132
14.6	The jet grouting.....	134
14.7	The uncertainty of the geological condition on site: investigations, ground monitoring systems and emergency assessment	134
15	Conclusion.....	136
16	Bibliography/References	138
17	Appendix 1: Assessing sustainability qualitatively - DATA	146
17.1	Qualitative assessment for the permeation grouting technique.....	146
17.2	Qualitative assessment for the single fluid jet grouting technique	150
17.3	Qualitative assessment for the double fluid jet grouting technique.....	154
17.4	Qualitative assessment for the brine ground freezing technique.....	158
17.5	Qualitative assessment for the nitrogen ground freezing technique	162
18	Appendix 2: The pilot case LCA analysis for each soil treatment technology (Step 2 of the method) 166	
18.1	Generality.....	166
18.2	LCA analysis for permeation grouting (PG)	167
18.3	LCA analysis for single fluid jet grouting (JG-SF)	175
18.4	LCA analysis input for double fluid jet grouting (JG-DF).....	183
18.5	LCA analysis of artificial ground freezing with closed system (using brine) AGF-BR	190
18.6	LCA analysis artificial ground freezing with open system (using liquid nitrogen) AGF-LN	197
18.7	Comparison of the treatments' performances.....	204
19	Appendix 3 - The framework scoring refinement (Step 3 of the method).....	207
19.1	Permeation grouting assessment refinement.....	207
19.2	Single fluid jet grouting assessment refinement.....	210
19.3	Double fluid jet grouting assessment refinement	213
19.4	Brine ground freezing assessment refinement	215
19.5	Nitrogen freezing ground assessment refinement	218
20	Appendix 6: List of symbols and acronyms	222
21	Appendix 7: Index of figures	226
22	Appendix 8: Index of tables.....	229

Abstract

Soil treatment works are widely used in infrastructures building. The research has the purpose to provide the construction industry for a tool that support the relative stakeholders at various levels, from the concept and feasibility study, through the design and tender stages down to the execution of those specialistic interventions, complying to the EU Green Deal address.

A methodology of quantitative assessment of the environmental impact of ground treatments is proposed organized in 3 phases and based on a protocol (Envision) of sustainability assessment of infrastructure combined with DNSH criteria provided by the EU under the Green Deal program.

The 3 phased method consists of: an initial Envision/DNSH assessment, choosing the evaluation parameters appropriate to the case of soil treatment; a deepening phase through LCA (Life Cycle Assessment) analysis, the results of which in terms of the environmental impact of the treatment serve to refine the Envision/DNSH assessment during the third phase.

The method has been tested on a pilot case, an underground excavation in sand in an area near Milan, where the stability of the walls and their impermeability was guaranteed by the treatment. Five different technologies were studied (permeation grouting, mono- and bi-fluid jet grouting, brine and liquid nitrogen artificial ground freezing).

The results made it possible both to analyze the individual treatment technologies from the point of view of sustainability and to compare the technologies to each other. The freezing technology was generally the least impacting, while jet grouting treatments were strongly affected by the use of cement in the executive process, the production of which, as evidenced by LCA analysis, is also very impactful. The tested methodology, with its quantitative assessment of soil treatments, allows: infrastructure managers to make an informed choice of the most appropriate strategies to be applied in the context of the design or management of the project under consideration; designers to evaluate, propose and dimensioning interventions evaluated with a view to both economic and environmental sustainability; the performers of treatments to optimize their resources towards the sustainability, documenting the value "green" materials, machinery and procedures for procurement and clients.

The method showed that, as part of the LCA analysis to obtain more consistent results, the initial phase of data inventory on the impact of materials, machinery and energy supplies related to the product concerned, request to be fed by specific data, compared to the generic available in the currently used databases; the EPD (Environmental Product Declaration) documentation, EU-regulated but still sparse, provides for each product (material, machinery, equipment) a label containing the specific environmental impacts.

The geotechnical laboratory can play a role of primary importance to validate the performance of materials, products and processes both in the refinement in the sense of sustainability and in the testing of innovations always in the same perspective. The GFLab geotechnical laboratory, spin-off of Bicocca University and sponsor of this executive PhD, has recently developed and patented a laboratory equipment, ITS - Injection Tube System, to perform in laboratory a full scale injection by soil permeation via TAM, through a single valve, within a soil with standardized granulometry. This instrument, which reproduces the entire executive process of a type of soil treatment, can be therefore particularly useful to provide support in the perspective of technological innovation towards an improvement of the environmental sustainability of the permeation grouting.

Future research developments could be the development of the EPD for soil treatment interventions, the development of the methodology also for other geotechnical processing (piles, micropiles, diaphragm walls), the extension of the sustainability assessment up to the stage beyond the treatment completion, according to the LCA point of view.

1 Introduction

1.1 The context and the objective

Geological science and geotechnical practice are continuously growing of importance, particularly for the crescent necessity of facing processes that wide world are occurring. The urbanization on Earth, together with population growth is in rapid acceleration, involving constant demand for new infrastructure and housing as well as the expansion and refurbishment of existing assets. This is leading to a growing recourse to plan solution that exploit underground spaces for allowing the flows of people, goods, water, energy, waste, also connecting urban areas.

The building methods of these infrastructures gradually progress in terms of technological solution and efficiency. However, there the growing attention to the environmental and social conditions of humanity requires to enlarge this development in terms of sustainability and mitigation of environmental damage.

The available instruments for conducting comprehensive assessments of the sustainability of these approaches, that include social, environmental, and economic dimensions, are now somehow restricted. The rising of the nature of a subterranean 'engineering ecosystem', tailored to address specific requirements, reveals this sort of lack.

The growing environmental sensibility brought its instance to the political level, and for example in the EU, this allowed the institutions to endorse, within the Green Deal 2050 policy, a Green Procurement System, as outlined in COM [2008]. This kind of systems encourage the sector to expose operational decisions (technological, productive, organizational) that have the objective to mitigate environmental effects of a given intervention and to corroborate the presence of a corporate strategy focused on sustainability.

In this context, the objective of the research presented by this thesis is methodological with the aim of establish an easy approach for assessing the sustainability and environmental (as well as social) consequences of ground improvement and geotechnical projects. This will be implemented in accordance with: the European Union's Green Deal, internationally recognized sustainability rating systems, quantitative analytical techniques.

The Executive PhD stage has been conducted, under the sponsorship of GroutFreezLabs.r.l.¹ by two authors having 30-year experience in civil engineering: the author this thesis, professional expert in design and supervision on-site in soil treatment technique that followed the Geological Sciences PhD curriculum, and Stefano Susani, professional expert in design and management of infrastructures that followed the Environmental Science PhD curriculum.

The role of the construction industry in the EU

The European Union's industrial plan, released in May 2021, has designated the construction ecosystem as one of the 14 key ecosystems within Europe. As a result, the European Commission is closely monitoring this sector. The aforementioned industry sustains a workforce of 25 million individuals and encompasses a total of 5.3 million enterprises, with small and medium-sized enterprises (SMEs) constituting 99.9% of this figure. In addition, it is noteworthy that the European building goods industry accounts for over 10% of the added value within the European Union. This sector encompasses a significant number of firms, around 430,000, which collectively generate an annual turnover of 800 billion euros and contribute a gross added value of 240 billion euros. Over the last three years, several building materials, including those made from aluminum, copper, steel, and wood, have seen substantial swings in supply and demand, leading to price volatility. These fluctuations

¹ Aka GFLab, a Bicocca University spin-off company granted by University4Innovation in 2018.

may be attributed to robust demand, global extraction dynamics, and elevated transportation expenses. In addition, it is worth noting that some building items, like steel, glass, and aluminum, are characterized by a high energy consumption throughout their production process. This renders them particularly vulnerable to the impacts of the ongoing energy crisis [EPRS, 2022].

Infrastructures and buildings are often considered a relevant part of sustainable development because of their crucial role in society, the economy and the environment:

- The construction industry is responsible for about 10% of the global Gross Domestic Product (GDP) and employs 100 million people (Benoît et al. 2010).
- It consumes a large number of resources: 33% of the global energy consumption, 40% of the raw material consumption, contributing to 40% of the global solid waste generation (Choi 2019).
- Concrete production industry is responsible for about 7% of the global emissions, the iron and steel industries come right after (Zamagni et al. 2013).
- Material extraction and manufacturing account for about 90% of the total environmental impact of a residential building, while resource extraction and manufacturing contribute about 60% of the construction costs (Benoît et al. 2010).

The building sector annually consumes a staggering 1.6 billion tons of materials. The manufacturing process of these materials results in the release of 250 million tonnes of carbon dioxide equivalent (CO₂eq). In the context of constructing a structure, the construction phase alone accounts for around 50% of the cumulative emissions during its lifespan. In the context of a thesis on infrastructure, it is anticipated that there will be a need to reference data pertaining to a specific building case. It is evident that the realm of infrastructures has exhibited a delay, particularly in terms of sustainability, in comparison to the field of construction. Consequently, the available environmental data within the sector primarily pertains to the latter. In order to provide a comprehensive overview, it is important to note that building and demolition waste holds a prominent position as the primary waste stream within the European Union, accounting for more than one-third of the total trash generated. In contrast, there is considerable variation in reuse and recycling rates across the European Union. Despite the Waste Framework Directive, 2008/98/EC, setting a recovery target of 70% by weight for this waste stream by 2020, the predominant methods of recovery continue to be storage operations in specialized or non-specialized landfills, as well as the utilization of low technological quality approaches such as the reuse of recycled aggregates in road foundations and conglomerates.

In order to ensure the sustainability of the construction sector, a framework of this nature necessitates a fundamental intervention within the value chain. This intervention is crucial in response to the more demanding and ambitious targets set by the European Commission and member nations. Life cycle thinking, along with its associated techniques such as life cycle assessment, has significant importance within this setting. These tools enable the quantitative assessment of the sustainability performance of the items and processes under analysis.

Looking for the System

Sustainable development saw its formal definition in the Brundtland report of 1987 and focuses our attention on balancing the needs of present and future generations (Paulsen 2001). The growth in our awareness of sustainability is also a consequence of the increasingly evident climate change, the scarcity of resources, free territory, and energy.

The effects that the uncontrolled exploitation of the planet generates have an impact on the entire ecosystem and, as such, cannot be schematized with traditional linear analyses. A reaction, aimed at minimizing a particular impact, leads to the involuntary maximization of another, or focusing on a particular phase of use does not allow us to see the feedback on the others. This is why, when considering the effects of the production or construction of an artifact, it is necessary to put ourselves in a position to have the entire picture of its entire life cycle in front of us. The phases of the life cycle of a product or technological process can be reduced to (a)

how the materials that constitute it are obtained, (b) how the parts are made, (c) how it is built, (d) how you use and manage it, (e) how you keep it in good condition, (f) how you destroy/demolish it and (g) how you get rid of what's left of it, a cradle-to-grave view, as they say (Simonen 2014). To prevent "burden shifting" (i.e., the movement of impacts along the same value chain or from one chain to another), it is necessary to consider all these moments of the life cycle. As we have said, concentrating the actions on one could unintentionally, increase the impact of one of the others (Hauschild, et al., 2017).

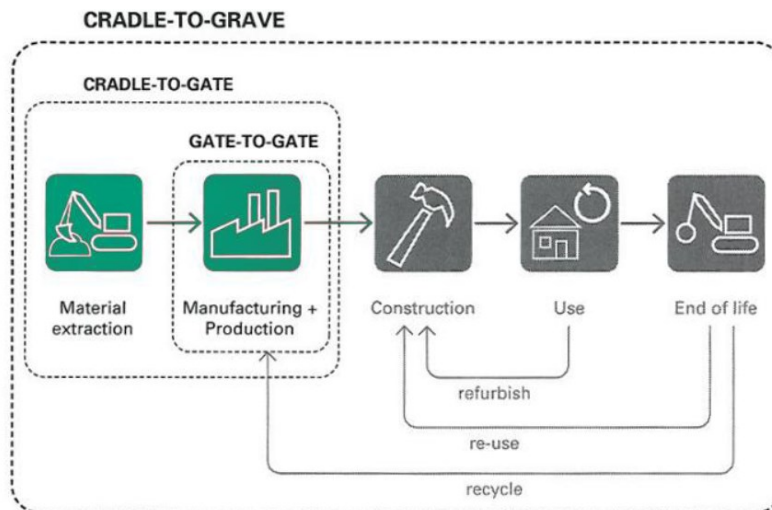


Fig. 1-1, The cradle to grave cycle (Simonen, 2014).

The field of life cycle assessment (LCA) addresses the necessity of quantifying the whole environmental impact of products and activities. The technique and applicability of Life Cycle Assessment (LCA) have undergone substantial evolution since its first development in the 1960s. In the context of construction and infrastructure, the utilization of Life Cycle Assessment (LCA) can provide valuable insights for engineers, designers, and producers. LCA enables these stakeholders to enhance their decision-making processes, assess the environmental impact of materials, construction components, and processes, and foster the identification of strategies and methodologies aimed at mitigating these effects.

When we talk about the life cycle, the reference metaphors are always, and deliberately, biological and systemic: the life cycle takes into account the biological evolution of an organism or an ecosystem from when it was born (in our case, the extraction of the original materials) to when it dies (obsolescence, demolition, reuse, etc. of an infrastructure). A second metaphor arrives through the interposition of the social sciences (created by Lord Beveridge, the inventor of the concept of the Welfare State). It is that of the cradle to grave (from the cradle to the grave. It is another way of talking about life cycle, and allows a whole series of variants: (1) from cradle to cradle (From Cradle to Cradle, as the title of the famous book by William McDonough and Michael Braungart states), to refer to the adoption of circularity criteria in waste management, (2) from the cradle to the gate (from cradle to gate or from cradle to site), to refer to processes that go from the materials of origin to the 'gate' of the site of use, (3) from gate to gate or from gate to the grave, for indicate phase of the life cycle that goes from one intermediate to another or from one intermediate to the final one (from gate to gate or from gate to grave).

While LCA has predominantly been employed in the infrastructure sector to establish overarching policies and projects, it can serve as a potent facilitator for sustainable procurement practices when accompanied by precise data on materials and technological processes. By selecting appropriate objectives such as cradle-to-gate or cradle-to-site, and utilizing specific data derived from Environmental Product Declarations, LCA enables the comparison of various material usage scenarios and the assessment of the advantages associated with adopting innovative or more sustainable construction methods.

An existing gap: the need for sustainability metrics to push ahead a green supply chain in the construction industry

Sustainability is a multi-dimensional concept that promotes a balanced pathway of human activities so that the natural environment is not degraded, the natural resources are not depleted beyond acceptable limits, health and happiness of the present and future generations are promoted and maintained, and the lives of other species are preserved [Basu, 2013]. There is an additional temporal dimension to sustainability because what seems sustainable today may not be considered sustainable after few years, and this plays a relevant role in the construction industry: indeed, principles and practices related to sustainable development have to be constantly evaluated and updated. At the same time, sustainability instances and issues are very often not well defined and involve complex interactions and feedback loops between the society and environment [Basu, 2013]. This contrasts with the traditional way on which engineering is based on: well-established heuristics and linear pathways towards the required solutions established by communities of specialists. A ‘sustainable’ approach may not be acceptable at first from an industrial or economic point of view, particularly because it is more often supported by qualitative ethical and moral statements and lacks quantitative assessments [Basu et al., 2015; Basu et al., 2013].

The figure below identifies the ideal entry point of a sustainability assessment, that must happen as early as possible in the planning and strategy-making phase of a project in order to be truly effective.

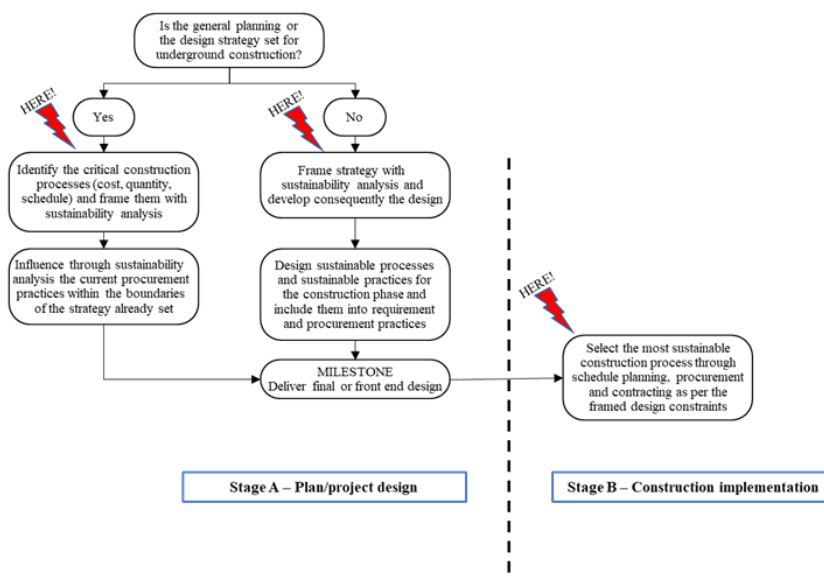


Fig. 1-2, The ideal entry points of sustainability in a construction process.

1.2 The case for geotechnics and ground improvement techniques

In order, for geotechnical engineering, to contribute to sustainable development, the core practice must be made environment friendly and resource efficient, but mainly, geotechnics has to be able to tell, how much it does contribute. The need for a holistic complete sustainability assessment framework has been already stressed for geotechnical projects to ascertain the relative merits of different options available for a project [Basu, 2013]. According to Dam and Taylor [2011], any sustainability assessment framework should have a life cycle view of the geotechnical processes and products and should:

- i. ensure societal sustainability by promoting resource budgeting and restricting the shift of the environmental burden of a particular phase to areas downstream of that phase,
- ii. ensure financial health of the stakeholders, and
- iii. enforce sound engineering design and maintenance.

The field of ground improvement techniques, characterized by its wide range of methods and the increasing diversity of requirements and technology, is an excellent opportunity for the application of a design approach rooted on sustainability principles. One aspect pertains to the necessity of prioritizing the efficacy of processes and technologies, while the other aspect encompasses a diverse array of materials, occasionally characterized by high levels of novelty. The stakeholders involved in geotechnics, including designers, constructors, and consumers, frequently encounter the necessity for ground improvement in the presence of various contextual restrictions. These constraints encompass logistical, mechanical, scheduling, and cost-related factors. Regrettably, the allure of some choices may overshadow the consideration of environmental efficiency, hence neglecting sustainability as a viable alternative.

This thesis aims to investigate a pilot case whereby several ground improvement techniques will be employed to achieve waterproofing and stabilization of an open-air excavation situated below the water table in the vicinity of Milan.

With this approach it is possible to put in evidence the variety of operational solutions that typically are taken in consideration for solving issues connected with building a construction involving the ground. The evaluation of the possible options of soil treatment works will be carried out in the light of not only economical (as mostly happens nowadays), but also social and particularly environmental sustainability criteria

1.3 Goal of this research: a Three Phased Method for sustainability assessment of geotechnical works

Taking into consideration:

- a) the present pressure that owners and investors are putting on the infrastructure construction sector to demonstrate tangible efforts toward sustainability, and
- b) the complexity required to transparently and qualitatively comply to the EU Green Deal requirements (to get access to funding),
- c) the requirement for acknowledged third-party holistic criteria that are capable of framing a project from the holistic high-level view all the way down to the individual construction process, and, lastly,
- d) the requirement to quantitatively demonstrate each sustainability choice/achievement,

with this research, we suggest a three-step evaluation technique that can support decision-makers in forming sustainable choices, particularly at the building process and practice level, which is where the construction supply chain is generated. This method can help shape sustainable choices at the construction process and practice level. Being, as professionals, specialized in geotechnical engineering, the research team decided to focus on ground improvement techniques. There is full conformity with the taxonomy established by the EU and the related DNSH requirements in the proposed approach, which can help owners and investors enhance their efforts toward green finance.

After the introduction, chapters 2, 3, 4 will delve into the examination of sustainability standards and the regulatory arrangements established by the European Union. Chapters 5 and 6 will primarily address the establishment of a systematic linkage between the Envision protocol, chosen as assessment framework to ground the proposed method and the DNSH criteria established by the EU. Additionally, the development of a customized set of indicators, together with their corresponding metrics, will be explored for the purpose of evaluating the sustainability of geotechnical construction processes. The utilization of this framework tool will facilitate decision makers in formulating the design and construction decisions for each operational process. This tool employs a methodology that enables a prompt demonstration of compliance with the six environmental objectives established by the European Union, as well as the extent of ambition in relation to project sustainability. Chapter 6 describes the proposed three-steps method, grounded on a set of the Envision/DNSH criteria identified as significant for analyzing ground improvement practice, organized as it

follows: a first step of qualitative analysis of the studied process sustainability; a second step of quantitative analysis of the impacts produced by the process according to the LCA method; a third step in which first step assessment is revisited and quantitatively refined in the light of the LCA results. Chapter 7 illustrates the studied soil treatment techniques, presenting their characteristic in view of the further analysis. Chapters 8, 9, and 10 reviews the use of the proposed methodology applied to the study of a pilot case, an open-air excavation to be carried out thanks to the supporting and watertightness effect provided by five distinct soil treatment interventions. Incorporated within Chapters 11 and 12 are dedicated to the inclusion of the viewpoints related to the life cycle costing and the social impact assessment. Chapter 13 is centered on the discussion of the proposed methodology, based on a LCA use; perspectives and possible limitation to be faced in further research activities are presented. Chapter 14, moving from the results of the analysis made for the pilot case, will discuss the aspects that the three-steps method allows to highlight as crucial under the sustainability point of view and their practical effects on the design, investigation and construction stages of a ground improvement intervention. Moreover, the central role that, with this new approach, will be assumed by a geotechnical laboratory is focused, illustrating 2 innovative devices in charge of GFLab. Chapter 15 illustrates the conclusions of the thesis. Acknowledgments in Chapter 16 and Bibliography in Chapter 17 complete the document. Final appendixes, being activities with a marked environmental cut and coming from the thesis work of the research coauthor, are included, by deepen the three phases of the proposed method calculations (Envision protocol application, LCA analysis) (number 1,2,3), the examination of the Environmental Product Declaration (number 4) and Green Procurement (number 5). Annexes 6 and 7 include figures and tables indexes.

2 The EU regulatory framework as a point of reference

To mitigate climate-driven risks and their impact on assets and financial institutions, global efforts from various stakeholders to foster sustainable development have resulted in the 2015 Paris Climate Agreement, a legally binding global climate agreement which emphasizes the urge to channel financial flows towards climate-resilient development and the United Nations 2030 Agenda for Sustainable Development, which sets seventeen Sustainable Development Goals (SDGs) tied to environmental, social and governance (ESG) assumptions and requirements (Meneghini 2022). In complete accordance with a 'follow the money' rule, this agreement actively included into the sustainability debate investors, clients, constructors, designers and forced them to develop explicit sustainability targets to get access to public green funding.

In December 2019, the European Commission introduced the European Green Deal, an extensive legislative and regulatory initiative designed to address climate change and various environmental concerns. The EU Green Deal outlines a novel growth strategy with the objective of transitioning the European Union into a resource-efficient and competitive economy by 2050, characterized by the absence of net greenhouse gas emissions. Additionally, the plan aims to achieve a reduction of 50/55% in emissions by 2030, positioning Europe as the pioneering climate-neutral continent. The achievement of this objective necessitates a substantial investment turnaround in the order of hundreds of billions of dollars into the foreseeable future. Consequently, it is imperative to establish a robust legislative and regulatory framework that supports sustainable funding.

In pursuit of this objective, the European Union Commission established the High-Level Expert Group on Sustainable Finance (HLEG) in 2016. The primary task assigned to this group was to formulate a roadmap for sustainable finance inside the EU. The overarching aim of this roadmap was to harness the allocative function of financial markets in order to establish the most sustainable financial system globally. The final report of the High-Level Expert Group (HLEG) was published in 2018, whereby eight important suggestions were outlined. The foremost proposal pertained to the creation of a unified sustainability taxonomy framework for Europe. The aforementioned widely used "green" categorization system offers transparency and serves as a reference for market players in determining whether investments and financial goods align with the European Union's sustainability goals. This system aims to provide consistency across various standards and products, hence promoting economic development. The applicability of the EU Green Taxonomy extends to several asset categories and forms of capital allocation, necessitating alignment with the environmental public policy objectives of Europe. The Regulation (EU) 2020/852, titled "on the establishment of a framework to facilitate investment and amending Regulation (EU) 2019/2088", was enacted by the European Parliament and the Council in June 2020. It came into effect in July 2020.

The Regulation serves as the legal foundation for the European Union's Green Taxonomy framework. Its objective is to define the criteria that determine whether an economic activity meets the standards of environmental sustainability. This is done to assess the level of environmental sustainability associated with an investment. The EU Taxonomy serves as a legislative instrument aimed at encouraging investors to actively engage in the transition towards sustainable finance. Its primary objective is to provide a clear framework for defining the criteria that the European Union (EU) deems as environmentally sustainable, therefore guiding investors in making well-informed decisions on their investments. The primary justification for this approach is the necessity of providing the financial sector with explicit instructions about the categorization of environmentally sustainable activities. This is crucial in order to direct capital towards the economic and social transformation required for the establishment of a climate-resilient and ecologically neutral economy. This development is expected to facilitate the growth of cross-border sustainable investments inside the European Union (Meneghini, 2022). the contours of what is environmentally sustainable, article 9 of the Taxonomy

Regulation lays out a list of six environmental objectives that represent the basis of the Technical Screening Criteria (TSC)²:

1. Climate change mitigation, i.e. the process of holding the increase in the global average temperature to well below 2 °C and pursuing efforts to limit it to 1.5 °C above pre-industrial levels.
2. Climate change adaptation, i.e. the process of adjustment to actual or expected climate change and its impacts.
3. Sustainable use and protection of water and marine resources;
4. Transition to a circular economy.
5. Pollution prevention and control.
6. Protection and restoration of biodiversity and ecosystems.

Considering the above, under article 3 an economic activity shall qualify as environmentally sustainable where it meets - cumulatively - the four following conditions:

1. It contributes substantially to at least one environmental objective.
2. It does no significant harm (DNSH) any other environmental objective.
3. It complies with minimum social safeguards defined on a local national basis.
4. It complies with applicable technical screening criteria defined on a local national basis.

The EU taxonomy framework provides the construction industry with a general criterion for assessing sustainability, that is a precondition to get access to funding and financial leverage. The DNSH criteria that assesses the compliance to the six environmental objectives is quickly becoming THE sustainability criterion in the construction industry at all levels and for any technology.

Condition 1: Substantial contribution to an environmental objective.

With regard to the first condition, the Taxonomy Regulation extensively lists key principles (but no detailed activities) shedding light on what “substantially contributing” to an environmental objective means. The contribution threshold is repeatedly defined as “substantial” to clarify that limited improvements to the current state of environmental performance are not sufficient, especially in view of the colossal investment efforts required to advance the transition of the EU economy towards sustainability. Similarly, activities that can have marginal, albeit positive, incremental improvements on the environment are not deemed Taxonomy-aligned.

Substantial contribution can be achieved under three scenarios:

1. when an economic activity has either a low environmental impact or can replace existing higher-impact activities;
2. when an activity has the potential to reduce adverse climate impact from other existing activities;
3. when an activity can make a positive environmental contribution.

In addition, regarding the climate change mitigation objective only, the Taxonomy Regulation recognizes so-called “transitional activities”. These are activities for which no technologically and economically feasible low-carbon alternatives are yet available. They are eligible to make a substantial contribution if they support the transition to a climate-neutral economy consistent with a pathway to limit the temperature increase to 1.5° C above pre-industrial levels, provided that their greenhouse gas emission levels correspond to best

² The technical screening criteria are a set of rules and metrics used to evaluate whether an economic activity can be considered environmentally sustainable under the EU Taxonomy.

performance in the sector or industry, they do not hamper the development of “greener” alternatives and they do not lead to a lock-in of carbon intensive assets.

An economic activity can substantially contribute to climate change adaptation by providing adaptation solutions that alternatively reduce the risk of adverse climate impact on the activity itself or on people, nature and assets.

Substantial contribution to the transition to a circular economy may be achieved by using natural resources in production more efficiently, through an increase in durability, reusability and recyclability of products, as well as through waste generation reductions.

Any given substantial contribution to one of the environmental objectives may also be generally achieved by means of so-called “enabling activities”, which directly enables other economic activities to make a substantial contribution to one of the objectives (e.g. renewable energy manufacturing), provided that such activities do not lead to a lock-in of assets that undermine long-term environmental goals and have a substantial positive environmental impact on the basis of life-cycle considerations.

Condition 2: Do no significant harm principle.

The second cumulative criteria that an economic activity must meet is the “*do no significant harm*” (DNSH) principle, the rationale of which is for an activity falling within one of the substantial contribution categories not to qualify as environmentally sustainable if it causes more harm than benefits to an environmental.

The Taxonomy Regulation expressly lists how an economic activity may significantly harm each environmental objective, taking into account a holistic approach to the life cycle assessment (i.e. production, use and end of life) of products and services provided by each activity.

Namely, an activity shall be considered to significantly harm climate change mitigation if it leads to significant greenhouse gases emissions and to significantly harm climate change adaptation if it increases adverse climate impact on people, nature, or assets.

Significant harm to sustainable use and protection of water and marine resources is caused when an activity is detrimental to the good environmental status of bodies of waters, whereas inefficiencies in the use of material or natural resources and increases in waste generation lead to significant harm to the circular economy objective.

Finally, activities leading to an increase in pollutants emissions and causing detrimental effects to the resilience and conservation status of natural habitats and species may cause harm to the pollution prevention and control objective and to the protection and restoration of biodiversity and ecosystem objective, respectively.

TSC for DNSH to climate change mitigation and climate change adaptation were adopted in the Climate Delegate Act, together with generic DNSH guidance for the other four environmental objectives.

Condition 3: Minimum social safeguards.

The third aggregate condition for meeting the environmental sustainability requirement is for an economic activity to be compliant with minimum social safeguards as defined in article 18 of the Taxonomy Regulation. In a nutshell, these are procedures implemented by companies to ensure alignment with a set of social and governance standards related to human and labour rights.

Condition 4: Compliance with technical screening criteria.

Finally, the fourth cumulative condition is compliance with TSC (Technical Screening Criteria). Since the EU Taxonomy does not defined types of activities but rather set a conceptual framework, the Commission has so far tried to define in the Climate Delegated Act the actual “green” list of activities that can make a substantial contribution to the two climate-related environmental objectives, i.e. mitigation and adaptation. As a result,

the Delegated Act contains a detailed and list of some 85 eligible activities divided according to their macro-sectors, including forestry, transport, energy, information and communication technology, waste and water, and manufacturing.

In light of the above, practically speaking any Taxonomy-user will need to cumulatively assess whether the economic activity conducted is covered by the Taxonomy and its Delegated Acts and for which environmental objective(s), whether the activity meets the substantial contribution qualitative and/or quantitative thresholds embedded in the performance requirements set out in the TSC and finally conduct due diligence to ensure compliance with the DNSH criteria and with minimum social safeguards.

Once these steps are completed, it is possible to calculate Taxonomy-alignment and display evidence of the results by means of disclosure indicators, which we shall discuss infra.

The following scheme synthesizes the whole procedure of assessing the sustainability of an economic activity.

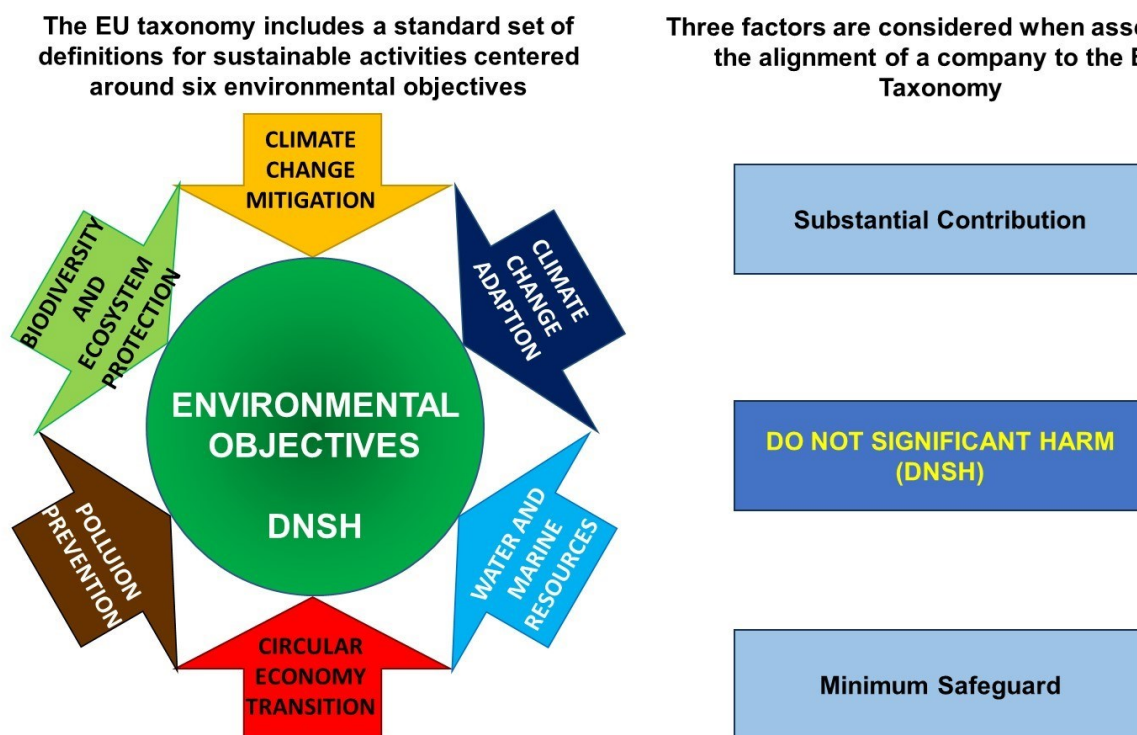


Fig. 2-1, The EU Regulation Objectives (and the Do No Significant Harm criteria)

3 The international sustainability protocols dedicated to infrastructures

The use of sustainability assessment tools in the context of the built environment began in the 1990s and 2000s, with dedicated building tools such as BREEAM (UK), LEED (USA), and Green Star (Australia and New Zealand), now definitely established and equally recognized for the substantial contribution they have given to the green building revolution. At the beginning of the 2000s, as the benefits for buildings became evident, the lack of similar tools for the world of infrastructures began to be highlighted. In the UK, the civil infrastructure industry, led by the Institution of Civil Engineers, launched the CEEQUAL infrastructure assessment tool in 2003. Since CEEQUAL, specialist industry initiatives have enabled the creation of Greenroads and Envision in the United States and the Infrastructure Sustainability Tool in Australia. These four classification systems are increasingly used in the infrastructure sector, and numerous examples (and case studies) of certified projects are now available.

Infrastructure sustainability assessment tools work like their construction counterparts and evaluate and certify the performance of infrastructure projects and systems against various sustainability criteria (including resource use, ecology, stakeholder engagement, community impacts, climate change and resilience, land use, urban design, etc.). These tools are generally promoted by infrastructure owners and institutional clients (such as transport agencies and territorial authorities) and applied to infrastructure asset projects by teams of specialists.

The strengths and weaknesses of assessment tools of this kind can be summarized as follows (Griffiths et al. 2018).

Strength points.

- They define a multidimensional, criteria-based approach that provides a common metric and language for all stakeholders in the infrastructure supply chain.
- They create an algorithmic mechanism for establishing a standard assessment based on third-party verifiable evidence.
- Encourage infrastructure owners, developers and project teams to strive for higher levels of sustainability performance.
- They are a concrete tool to lead/induce the adoption of sustainable practices in regulatory and planning mechanisms and in the definition of minimum standards; furthermore, they make sustainability codifiable, measurable and manageable.
- They allow clear communication of the objectives, efforts and results implemented for sustainability.
- They define a flexible framework that allows the valorization of innovation in design and construction solutions.

Areas for improvement.

- They are based on the simplification of a complex situation using a single rating "score" with a potential loss of visibility of the underlying drivers; focusing only on the final rating may not allow us to capture the entire scope of sustainable infrastructure actions, in particular social and economic issues.
- They could focus efforts on minimizing "unsustainability" rather than pushing the infrastructure construction supply chain to create something sustainable.
- For the same reason, an approach of this nature may not favor a strategy of integrating efforts, but assign 'his' limited area of action to each expert.
- It is certainly difficult to cover the entire range of infrastructure projects, which may differ in scale, character and location, with a single assessment tool.

- They could generate a tendency to "chase points" through mandatory requirements and evaluation thresholds, ending up guiding the designer or client rather than encouraging their initiative.
- They may tend to be used as a 'seal' of sustainability of a project (at its conclusion) rather than encouraging the analysis of alternatives.

The challenge of these systems is to reach a compromise between adequately and comprehensively addressing the principles of sustainability and providing a scheme that is understandable and accessible to clients and professionals. In their study, Griffiths et al. (2018) conclude that assessment tools of this nature and type are crucial in disseminating sustainability knowledge and practices among the subjects who use them in projects, in the communities with which they interact, and within the organizations for which they work. The impacts of infrastructure sustainability assessment tools are not limited to projects undergoing assessment and certification (i.e. their formal use) but extend to the entire infrastructure sector through their informal use at individual, organizational, and of sector.

The Envision Protocol

Holistic sustainability protocols for infrastructure are slowly catching on in the global infrastructure construction industry, while they have become a methodological asset in the building industry (LEED, Green Building Council, etc.). There are different reasons for this situation: the infrastructure construction industry has been so far conservative and, as infrastructure belongs more often to public owners, safety, cost control and operational performance are still the drivers when it comes to choose and size construction processes (especially through public procurement). Some Western Countries (UK, Germany, Australia, US) started to develop dedicated frameworks after 2010 [see Holt (2011) and Holt et al. (2009)] and one among them, the voluntary Envision protocol developed in US by the Institute for Sustainable Infrastructures in collaboration with Harvard University [Institute for Sustainable Infrastructure, 2018], is taking over in Italy as a sector reference, with examples in various leading infrastructure systems: railway, electric grid, renewables, power generation, roads and highways, urban subways, etc..

Envision is a framework that provides the guidance needed to initiate the systemic change in the planning, design and delivery of sustainable and resilient infrastructure, as requested by the EU Green Deal. Envision is a decision-making guide, not a set of prescriptive measures and provides industry-wide sustainability metrics for all types and sizes of infrastructure to help users assess and measure the extent to which their project contributes to conditions of sustainability across the full range of social, economic, and environmental indicators. Furthermore, the Envision framework recognizes that these sustainability factors are variable across a project's life cycle. As such, Envision helps users optimize project resilience for both short-term and long-term impacts.

The framework provides a flexible system of criteria and performance objectives to aid decision makers and help project teams identify sustainable approaches during planning, design, and construction that will carry forward throughout the project's operations and maintenance and end-of-life phases. Using Envision as a guidance tool, owners, communities, designers, contractors, and other stakeholders are able to collaborate to make more informed decisions about the sustainability of infrastructure.

Community infrastructure development is subject to the resource constraints of multiple departments and agencies, each with different schedules, agendas, mandates, budget cycles, and funding sources. Ratings systems and tools intended for buildings are not designed for this context and cannot adequately assess the extensive external benefits and impacts infrastructure has on a community. Envision assesses not only individual project performance, but how well the infrastructure project contributes to the efficiency and long-term sustainability of the communities it serves.

Envision is a framework that includes 64 sustainability and resilience indicators, called 'credits', organized around five categories: Quality of Life, Leadership, Resource Allocation, Natural World, and Climate and Resilience. These indicators collectively address areas of human wellbeing, mobility, community development,

collaboration, planning, economy, materials, energy, water, siting, conservation, ecology, emissions, and resilience.

The Envision framework is comprised of 64 sustainability indicators, called credits, that cover the full dimensions of infrastructure sustainability. Each credit in the Envision system includes an intent statement and metric, levels of achievement, a description, ways to improve performance, evaluation criteria and documentation guidance, and related Envision credits. The credits are organized into five categories and 14 subcategories by subject matter.

- a. ***Quality of Life***: Wellbeing, Mobility, Community.
- b. ***Leadership***: Collaboration, Planning, Economy.
- c. ***Resource Allocation***: Materials, Energy, Water.
- d. ***Natural World***: Siting, Conservation, Ecology.
- e. ***Climate and Resilience***: Emissions, Resilience.

Every infrastructure project impacts all five Envision categories, often with complex trade-offs. For example, in an effort to avoid critical habitats, projects may have to consume more resources. Conversely, projects that reduce resource consumption may find they are also achieving the benefit of reducing harmful emissions. By grouping the credits into broader categories of impact, Envision helps users to navigate the complex trade-offs or synergies across the credits.

The Envision levels of achievement define the level and quality of project performance in each credit as follows:

- ***Improved***: Performance that is above conventional. Slightly exceeds regulatory requirements.
- ***Enhanced***: Sustainable performance that is on the right track. There are indications that superior performance is within reach.
- ***Superior***: Sustainable performance at a very high level.
- ***Conserving***: Performance that has achieved essentially zero negative impact.
- ***Restorative***: Performance that restores natural or social systems. Such performance receives the highest award possible and is celebrated as such. The Restorative level is not applicable to all performance objectives.

Not all credits have five levels of achievement. The levels are determined by the nature of the credit and the ability to make meaningful distinctions between levels. The level of achievement table clearly indicates the evaluation criteria that must be addressed for each level.



Fig. 3-1, First set of Envision credits



Fig. 3-2, Second set of Envision credits

Each of the 64 credits has multiple levels of achievement representing the spectrum of possible performance goals from slightly improving beyond conventional practice, to conserving and restoring communities and environments. By assessing achievement in each of the 64 credits, project teams establish how well the project addresses the full range of sustainability indicators and are challenged to pursue higher performance.

The advantage of using a frame view based on indicators is that it formulates clear and shared statements of what is achievable in terms of sustainability: a system based on absolute numerical values is unlikely to prove satisfactory. Differently as such, indicator systems can provide a crucial guide for decision-makers in a variety of ways, not least because they enable physical and social scientific aspects to be broken down to facilitate sustainable decision-making throughout the development process (Jefferson et al. 2007).

4 The state of the art for LCA and LCCA analyses in geotechnics

4.1 Life Cycle Thinking and Infrastructure

The life cycle concept is particularly effective for managing infrastructure assets, where assets such as roads, bridges, water, energy, and communication networks, which have a very long useful life, carry potentially significant and extensive environmental impacts. Approaching the management of an infrastructure asset from the point of view of life cycle thinking and sustainability means aiming to identify and prioritize the environmental impacts, as well as those of cost and management commitment during the entire life cycle, including construction, maintenance, and operation.

The life cycle concept uses a systemic approach to assess environmental impacts, for example, through quantitative analysis of material and energy use, emissions, and waste production. Thanks to a vision of this nature, decision-makers in the asset management process are led to focus above all on the following points:

- Implement sustainable practices throughout all life cycle phases, including designing for sustainability, using sustainable materials and construction methodologies, and maintaining and operating practices that minimize environmental impact.
- Continuously improve operational management through extensive monitoring and reassessment, including periodic life cycle assessments and implementing best practices and emerging technologies.
- Consider the needs and expectations of stakeholders, including communities, regulators, and users, in all decision-making processes.
- Collaborate with partners and stakeholders to promote sustainability and innovation in infrastructure asset management.

As can be seen, the economic aspects (and technical, for example, durability, resilience, etc.), the environmental and social aspects (the impacts on local communities, the induced economic benefits, etc.) all contribute to the logic of the cycle of life and allow a 360° enrichment of the performance evaluation of an asset of this type.

The specificity of the infrastructures makes the application of these principles very complex but, above all, it requires a profound knowledge of the characteristics, history, and potential of the specific asset and, as we have seen, each infrastructure network represents a 'prototype' in itself, and therefore, from the point of view of life cycle assessment, an always different and very close 'inventory'.

The infrastructure life cycle

Taking up a suggestive vision of the economists of the Collective for Fundamental Economics (Barbera et. al 2018), the large infrastructures that serve daily life are not just tools for strengthening other economic activities, nor are they just molecular and isolated assets; large infrastructures define the spatial and temporal coordinates of our experience. They give substance to citizenship, understood as the possibility of living a free and dignified life, and are a decisive part of the fundamental economy, which is the infrastructure of daily life.

The infrastructures of Fundamental Economics arise from a political, entrepreneurial, and ethical effort that began at the end of the 19th century and continued until the early 1970s. It is an effort that begins at the municipal level and then passes into the hands of the states, at least until they can afford it. From a certain point on, it becomes transparent and is taken for granted. Infrastructures are fundamental. civil life as we conceive it is not possible without them.

Much of Europe's infrastructure was built before 1960 and is now close to the end of its theoretical helpful life, which at the time was estimated at 30 or 50 years. In some cases, the quality of the service they provide could be more optimal, and the state of conservation is critical. Although, as highlighted by Farahani et al. (2019), the 'culture' of maintenance remains relatively weak for works that were thought of as 'substantially

eternal', the regeneration of existing infrastructures requires a joint effort and enormous attention from the political, economic, and technical world. Strategic management of regenerative activities becomes essential, moving from extraordinary to ordinary maintenance based on in-depth assessments and evaluations, which must consider the needs of the operation and the need to maintain the level of service that communities require (Fregonara 2020). Thus, once again, life cycle thinking and assessment become essential.

Until not long ago, the economy of the construction world adopted a linear philosophy: the logical sequence of a linear economy can be summarized in the sequence of verbs: take-make-use-dispose, applied starting from raw materials.



Fig. 4-1, The linear economy of the Construction Sector (Bonviu, 2014).

It is an approach that aims to make the most of material resources with a short-term horizon, and which has now shown all its limits when the planet's pollution levels have begun to no longer be able to be ignored. The awareness of climate change did the rest (Bonviu 2014). Starting from this recognition, the concept of circular economy was born which we can define as 'self-generating economic development'. This principle assumes that:

- the development of an advanced country can take place even without giving rise to the uncontrolled exploitation of the natural and social resources of its territory and of the planet on which we live.
- The way in which decision makers must represent an infrastructure through the system that makes it possible is the logic of the life cycle, and it is the methodology that, for some years now, the European Union has been proposing us to use to change the supply chain and the resilience (also social) of the world of infrastructural construction, just as the regeneration program is being implemented.

The combination of circular economy and life cycle thinking is the basis of the criteria that inspire the European Green Deal (Dalhammar 2015).



Fig. 4-2, The Life Cycle Thinking approach (Dalhammar, 2015).

Each infrastructure has its own unique process and life cycle: an exciting way to represent it is to think of it according to the principle of the six 'r's represented in the figure, (a) rethink the material or product and its functions (re-think), (b) reduce the depletion of energy and natural resources (re-duce), (c) replace with alternative materials/products those that have harmful effects on the environment (re-place), (d) recycle the

material/product and reduce waste (re-cycle), (e) reuse existing assets (re-use), (f) repair and regenerate obsolescent assets (re-pair) [Nazir, 2017].




Fig. 4-3, The 6-R approach (Nazir, 2017).

It goes without saying that life cycle thinking and circularity perfectly embody the tripartite division of the concept of sustainability and allow us to comprehensively analyze all its parts: the environmental aspect, addressed with the life cycle assessment, the social aspect, addressed with the Social Life Cycle Assessment (S-LCA), and the economic one, addressed with Life Cycle Costing (LCC). The key to creating sustainable infrastructure is to keep all three aspects in balance, and, for this purpose, sustainability protocols, such as Envision, become extremely useful, offering a methodological guide to the conception and construction of an infrastructure initiative that is sustainable.

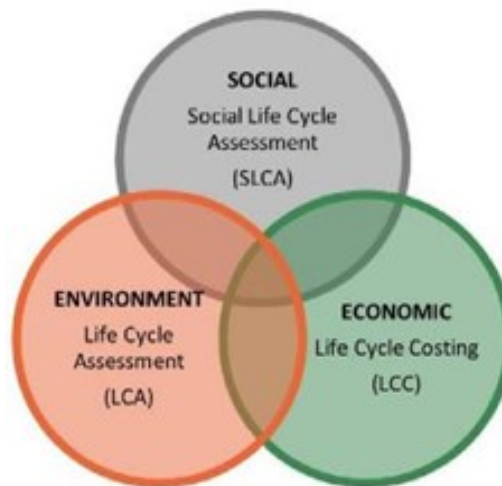


Fig. 4-4, Life Cycle Thinking, Circularity and Sustainability (Azapagic).

In short, the final objective of life cycle thinking is to improve the environmental and socioeconomic performance of the infrastructure during its entire life cycle. In particular, it seeks to help companies, clients, and professionals to be more aware of how their actions affect the environment, offering them a systemic point of view and inviting them to identify the best alternatives to reduce environmental and social consequences in the best possible economy.

The social theme in life cycle assessments is always relevant for infrastructures. They are by definition proximal, therefore rooted, territorial: they are an economy in the territory, not just an economy of the territory. This is not a possible accessory rooting but an intrinsic one: infrastructural systems and human settlements are inseparable (these are not goods and services that can be created 'far away').

4.2 Life Cycle Assessment applied to Infrastructure

We have seen how life cycle assessment is a methodological approach to analyzing systems from an environmental point of view, which examines their (environmental) implications along the entire value and production chain. It is not the only possible one; for example, environmental impact assessment and cost-benefit analysis are alternative approaches (Finnveden and et al. 2005).

Analyzing an environmental system means framing technological (production) systems, social systems (people), and natural systems (the environment) and examining their interactions. The social component indeed 'governs' the technical one, which obtains products and services from the production system, exploits natural resources, and emits pollutants and waste into the environment. These emissions determine, in turn, changes in the ecosystem. This is why the impact analysis framework is an essential element of LCA: it is closely linked to regulatory bodies' social and political vision, focusing on technological systems within this framework.

An LCA is closely connected to the discipline of industrial ecology, which, inspired by the similarity between technological systems and natural ecosystems, focuses on optimizing resource flows (materials, energy, products, services) to reduce environmental consequences. In order to achieve this, industrial ecology emphasizes the need for a systemic vision in the technological and environmental decision-making process, which is why LCA is a fundamental tool for this discipline.

LCA allows to identify the environmental consequences of product systems and production systems, for example, by identifying the product with the most negligible impact and best environmental performance and indicating ways to improve its environmental performance. It is a methodology that allows both the analysis of the single system and the comparison of alternative systems. An LCA can detect the possible transfer of environmental loads between life cycle phases, environmental impact categories, and geographical and political areas straightforwardly and transparently.

In fact, the environmental consequences are not necessarily (or only) associated with the product itself, but a life cycle analysis allows identifying those induced by the overall system that generated it [ISO 14040, 2006]. Furthermore, unlike the environmental impact assessment, the LCA is not based on in situ measurements of environmental loads but rather on modeling potential environmental burdens deriving from the flows of materials, energy, waste, and emissions to and from the production system. In this way, the results of an LCA may not represent actual site burdens but potential regional or planetary impacts! A part of the life cycle may be well managed from an environmental point of view in one locality, a region, or a country. However, an input (or output) component may not be and contribute negatively in another region or country (the so-called 'burden shift').

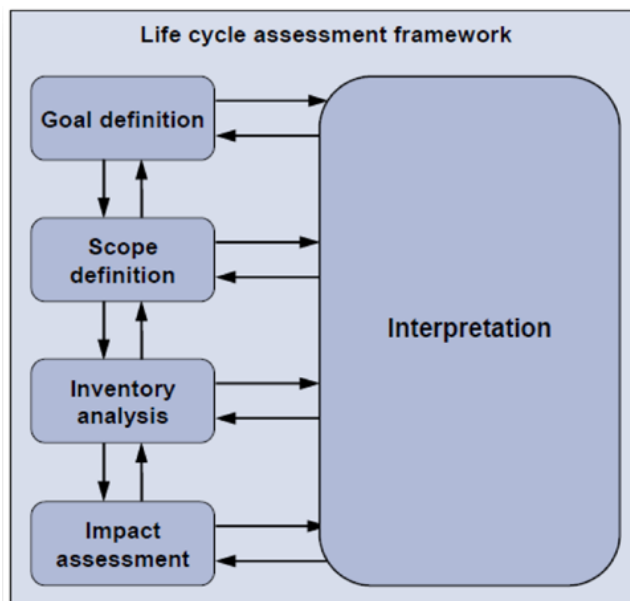


Fig. 4-5, Life Cycle Assessment framework (Guinée et al., 2011).

The ISO 14040 (2006) and ISO 14044 standards outline the general methodological basis for an LCA analysis. This emphasis on data standardization and certification is essential because it is the only way to allow comparisons of production processes across different production chains and transnational assessments of flows and materials.

1. A life cycle analysis includes four phases:
2. Initially, the purpose and scope of the LCA, system boundaries, and functional unit are established.
3. Next, the relevant inputs and outputs of the product system are cataloged and quantified in the life cycle inventory.
4. In the third step, the environmental relevance of the production factors and products is evaluated through the evaluation of the system's impact consisting of the entire life cycle.
5. Finally, the life cycle inventory and impact assessment results are determined in relation to the purpose of the study.

The ISO guidelines for LCA do not describe the LCA technique in detail: "there is no one way to perform LCA", and this means that there are, in fact, many application possibilities and a multitude of approaches in the world of life cycle assessment (Guinée et al. 2011).

4.3 Life Cycle Cost Analysis (LCCA)

Life Cycle Cost Analysis (LCCA) is a method to assess the monetary costs throughout a subject's life cycle. LCCA is used to reduce the monetary costs early and during the design process. It can be used on a system level in early stages when the whole construction is studied (for example on a road section, or when comparing different alternatives in detail such as a construction part). LCCA is not as standardized as LCA and what is included can differ between different countries and different project. The following analysis procedure is used in Sweden in all large road and railway project built by the Swedish Transport Administration. LCCA is then used to minimize costs during design, procurement, construction and use. Risks and uncertainties can be included in the analysis.

LCCA should describe the investment costs and future costs such as operations, maintenance and potential external costs. The life cycle cost (LCC) is the net sum of all costs for the product during investment (planning, design, construction etc.), operation, maintenance (including replacement) and external costs (stop costs etc.) and is calculated by:

$$LCC = C_{INV} + C_{OP} + C_{MAIN} + C_{EXT}$$

where C_{INV} is the costs in the investment stage, C_{OP} is the costs during operation, C_{MAIN} is the costs during maintenance and C_{EXT} is external costs. End-of-life costs are included if the studied subject has an end-of-life stage. Investment cash inflow and outflow should be discounted forward and the future cash inflow and outflow should be discounted to the cost status at the chosen baseline year. Doing this is defined as calculating its present value (PV). Net Present Value (NPV) is the sum of all PVs and can be calculated by:

$$NPV(i, N) = \sum_{t=1}^N \frac{R_t}{(1+i)^t}$$

where t is the time of the cash flow, i is the discount rate and R_t is the net cash flow (cash inflow – cash outflow) at time t . Other ways to calculate NPV are possible.

4.4 The three levels of application of Life Cycle Assessment in Infrastructure

The Network Level

Infrastructure systems are conceived (1) through three strategic decision-making levels (network, project, and process) and (2) in terms of service methods (for energy: production, transport, distribution, and use; for transport: road, rail, air or sea; for water: distribution, collection, treatment, storage; etc.). Furthermore, they are made up of a series of components, structures, artifacts, equipment, energy sources, and primary materials of origin, which are further divided into the elementary (but no less complex) processes that produce them. A mobility system, for example, is characterized by modes of transport (such as wheeled vehicles, constrained vehicles, etc.), structural systems (such as roads, trains, bridges, and tunnels), components and parts of works (such as road surfaces and railway sleepers) and materials (such as asphalt, steel and concrete).

All these elements have a life cycle that extends from the extraction of the raw materials to the end of their useful life, a term that can even be very far in time (50-100 years, but some Roman aqueducts still work today). The first problem in the existing literature regarding LCA is the difficulty of delineating typical horizons of space and time. Referring to a classification that derives from asset management (ISO 55000, for example), it is advantageous to identify these macro phases: conception and creation of the infrastructure, use, and maintenance of the infrastructure, demolition and/or regeneration of the infrastructure.

It is normally assumed that the production of materials (including the extraction and processing of raw materials) and the construction activity (including the transport of materials to the construction site, the use of construction machinery, and the handling of excavated materials and soil) are all part of the infrastructure construction process.

Similarly, the use of the infrastructure can be further divided into operation and maintenance. There is an ideal boundary between ordinary maintenance activities, which keep operations active, and extraordinary maintenance activities, which are a consequence of catastrophic events or interventions necessary to safeguard the usual life of the infrastructure. These activities are part of the ongoing management of the infrastructure.

We talk about regeneration when the infrastructure is re-built to relaunch its helpful life for another cycle, with real re-investment work.

The LCA focuses on the measurable environmental consequences of the materials and technologies used, highlighting the importance of reducing the environmental implications of the relevant production and management systems. Since the LCA makes environmental impacts more evident, it becomes an essential tool for establishing social indicators and creating incentives for reforming significant parts of production and, more generally, the social system. Indeed, LCA can provide information that can be used to calibrate policy and planning choices, for example, in the transport sector.

Planning an infrastructure system is a complicated process divided into several phases. The planning process varies from country to country. However, there are generally four primary decision levels: 1) the choice of service mode at the national level, 2) the choice of location and type of construction (e.g., bridge or tunnel) of the specific project, 3) the choice of the specific construction project and 4) the choice and influence on the supply chain involved through the procurement specifications (Miliutenko 2016).

The LCA can be carried out in any of these planning phases, and it relates to the purpose for which it is carried out: for example, if it becomes a tool to guide procurement, it must satisfy standards of transparency and consistency in order to provide a fair comparison of available options (Butt et al. 2015). Historically, the application of LCA has focused on the early stages of the decision-making process, aiming to provide systemic elements in the selection of impact scenarios. However, the application of LCA in this phase is limited by the indeterminacy of the data available at the preliminary design and feasibility level (Kluts et al. 2012) (Butt et al. 2020). Data would be available at later project stages. However, at that point, the potential to influence life cycle consequences is reduced (Butt et al. 2015), and LCA becomes a post-mortem exercise. However, when

pushed to the more detailed and process levels, LCA can help procurement and construction decision-makers influence the supply chain sustainably.

The ideal situation would be one in which, through an LCA in the preliminary (or feasibility) phase, the general choices could be oriented (for example, identifying hot spots and top offenders), and with subsequent further LCA analyses (for example of the process) in the executive design phases and the procurement phase, it was possible to refine the choices of materials and detailed technologies. This recursion can be seen as a complication, but it brings certain benefits in terms of sustainability because it makes the most of the potential of life cycle thinking.

The Project Level

Even if it is rare to find an LCA analysis that openly refers to one of the three phases that we have identified (Butt et al. 2015), it is a fact, and it is a great limitation, that most of the analyzes found in the literature specialist and in the project, documents are essentially conducted 'a posteriori', i.e., once the project has been completed in a very detailed form (sometimes they accompany the 'final' Italian-style project). This is a methodological forcing that arises from the need to narrow the margin of variability of the inventory. Sometimes, the analysis becomes a kind of fulfillment following the executive planning, for example, when it is used as a support for a certification (Miliutenko 2016) (Bizjak et al. 2017), or they are purely theoretical (for example, (Stripple et al. 2016)).

Indeed, this modality is often recognized as a fundamental limitation of using life cycle analysis on entire infrastructures. Furthermore, again, due to the difficulty (and complexity) of modeling the entire helpful life with adequate detail, it is not easy to find an infrastructure LCA that fully incorporates actual maintenance scenarios, which can limit its representativeness [Santero et al., 2010; Inyim et al., 2016; Jiang et al., 2019].

These are reasons why a second level of application of LCA is that of the project, in which the ambition of framing different overall scenarios is abandoned to focus on the development of the specific life cycle and incorporate the most relevant scenarios of the construction, management, and maintenance.

Considering that the temporal extension of the analysis is essential and that the management criteria beyond five/ten years are difficult to predict (even if only for a question of technological evolution), the maintenance issue takes on a particularly critical role. Infrastructure maintenance has three distinct components: (1) the analysis period, which determines how many years future maintenance is accounted for; (2) the maintenance frequency, which determines the frequency with which maintenance is performed during the considered period; and (3) the effects of climate change, which are expected to influence the durability of infrastructure and, therefore, the frequency of maintenance. It is clear that only approximations are possible since the infrastructure, as we have said, 'lives' for a long time (very often longer than the technologies and decision makers who made it possible), and it is not easy to identify its 'end of life' (Saxe and Kasraian 2020); on the other hand, its use and functionality constantly change during its life due to wear, obsolescence, the mutation of the social and economic context in which it operates and therefore, to name one factor, the loads. Climate change, as we well understand, complicates things further.

However, the more LCA is pushed to the project level (even at the cost of simplifications and typologization), the more inventories and datasets of information will be developed, gradually making the analyses more reliable generating a virtuous circle. A strategy that can be useful is to identify, within the useful life, those phases that are considered most relevant from an impact point of view (for materials, for technologies, for conditions of use, ...) and, programmatically, focus the analysis on them, aiming to improve sustainability performance without claiming to frame it completely. In this way, it will be possible to standardize how, for example, the construction phases, extraordinary maintenance, and, perhaps, reconstruction at the end of life are addressed. The impact on the construction value chain would be immediate and positive (Butt, Toller, and Birgisson 2015).

At the project level, the methods of conducting the LCA can become, if standardized and made transparent, an instrumental framework for the conduct of procurement policies. As many (Höjer et al. 2008) proposed, the definition of coherent and standardized scenarios by type of infrastructure could be integrated with the performance requirements of the technical infrastructure. These technological needs should be defined based on general preliminary investigations (which enrich the analysis inventory in detail) and, therefore, could also become the basis for future analyses in the same infrastructural area.

The Construction Process Level

The infrastructure generates a unique and complex context. It is not repeatable (for geotechnics, landscape, function), it has a very long useful life (sometimes more than 100 years) and goes beyond the generational gaze, it involves long construction times (a construction duration of five to ten years is not surprising, and note that such a duration is significantly larger than any country's current technological 'cycles' or regulatory cycles). These are just some of the reasons why the complexity of LCA analysis over the entire useful life of infrastructure is often a task that makes it challenging to define a coherent and credible data inventory. Once the problem has been framed 'from the satellite', the analysis effort must immediately concentrate on the data's realism and relevance in the critical phases (of most significant impact).

The life cycle assessment tool can be very useful, in fact, even when it is focused on a specific construction or maintenance phase, where by 'phase' we can mean either a technological phase (a particular geotechnical work, a critical construction process, etc.) is a construction (or maintenance) phase (concrete casting, shotcrete coating, restoration of an asphalt pavement), and where the functional unit of the analysis is a 'typical' unit that represents the process [Pettinaroli, Susani et al., 2023; Susani et al., 2023].

Life cycle stages in an LCA according to the European Committee for standardization				
Product	Construction processes	Use	End of life	Benefits and loads beyond the system boundary
A1: Raw material supply	A4: Transport	B1: Use	C1: De-construction demolition	D: Reuse-Recovery-Recycling-potential
A2: Transport	A5: Construction-installation process	B2: Maintenance	C2: Transport	
A3: Manufacturing		B3: Repair	C3: Waste processing	
		B4: Replacement	C4: Disposal	
		B5: Refurbishment		
		B6: Operational energy use		
		B7: Operational water use		

Tab. 4-1, Life cycle stages in an LCA according to the European Committee for standardization.

Of course, more importantly, when narrowing the duration and limitations of the LCA model, there is the opportunity to focus on materials and use/search for inventory information that precisely fits the “reality” of the analyzed process.

As we will see in the application cases of this document, the process approach (we could define it as 'life cycle construction process assessment') allows us to (a) isolate the materials/technologies of "maximum/greatest impact" or "maximum/greatest influence" and (b) focus on the life stages during which the most significant part of the overall impact of the infrastructure is expressed, reducing the complexity of the analysis and the influence of non-specific data.

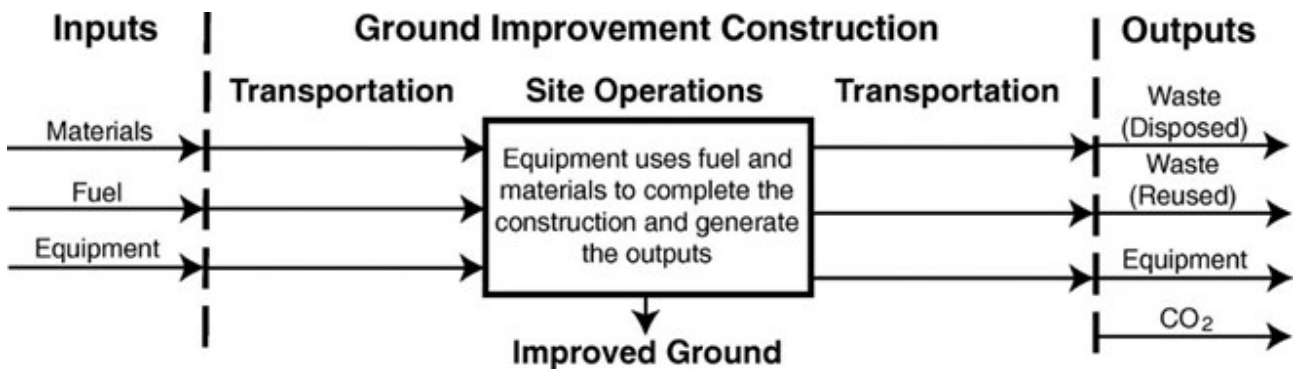


Fig. 4-6, An example of process oriented LCA approach (Shillaber et al. 2015)

An LCA analysis oriented to the construction process is helpful for several purposes:

1. It allows to compare different technological alternatives and choose the least impactful one (or the one with the most significant environmental performance for a specific type of impact).
2. It allows to compare different material choice options to “measure” their respective sustainability performance using data from, for example, their EPD certificates or directly from manufacturers.

This is an advantageous approach not only during the design phase, where the sustainability objective or performance of the infrastructure is developed, but also during the procurement phase, where this type of analysis can provide valuable quantitative information to support the sustainability performance of a material or technology within a specific construction process and a specific project.

4.5 LCA and geotechnics

LCA and LCCA are sustainability assessment tools. They assess the environmental impact and the monetary cost of a product. There are also other tools that assess sustainability. What they have in common is to assess sustainability. Sustainability includes the economic, the environmental and the social part of a product or service. Sustainable development was defined by Brundtland et al. [1987] as a societal development that “meets the needs of the present without compromising the ability of future generations to meet their own needs”. There are a vast variety of sustainability assessment methods available. In the following, two methods are introduced that have been used in geotechnical engineering.

GeoSPeAR is the cited method developed by Holt et al. [2010]. It is presented as the already discussed colour-coded rose diagram that assesses the studied subject based on four main criteria: environmental, economic, societal and natural resources. Each criterion has many subcriteria and the most sustainable choices are the ones with the result closest to the centre of the diagram.

Embodied energy (EE) and gas emissions can be assessed, the process of which is a part of an LCA. Embodied energy is the sum of all the energy required during the life cycle of a product. Gas emissions can for example be the airborne emissions CO₂, CH₄, N₂O, SOX and NOX. Inui et al. [2011] has assessed these gas emissions for four design alternatives for an embankment retaining wall system and compared the results. The most common emission to assess is CO₂. Shillaber et al. [2016] developed a streamlined energy and emissions assessment model (SEEAM) used for quantifying embodied energy and CO₂ emissions for ground improvement.

The quantitative multiple-criteria based assessment frameworks like Envision are mostly life cycle-based tools. Looking at the infrastructure industry, life cycle costing (LCC) and life cycle assessment (LCA) have been used to assess the sustainability of pavements [Praticò et al. 2011, Zhang et al. 2008, 2011]. Pittenger [2011] developed a life-cycle based performance metric known as Green Airport Pavement Index (GAPI) for comparing the sustainability of alternative airport pavement treatments. Lee et al. [2010a] combined LCA and LCC to quantitatively assess the advantage of using recycled materials in pavements. Lee et al. [2010b]

introduced a LCA based rating system known as Building Environmentally and Economically Sustainable Transportation - Infrastructure - Highways (BE2ST-in-Highways).

Geotechnical engineers may not be that familiar with making environmental impact assessments in their daily work [Samuelsson et al., 2021], still there is a wide literature about it including general soil stabilization [da Rocha et al. 2016], foundation support [Egan et al. 2010; Jefferson et al. 2010; Shillaber et al. 2017; Spaulding et al. 2008], land remediation or environmental containment [Harbottle et al. 2007; Spaulding et al. 2008], and flood protection [Shillaber et al. 2016]. As we said, the size of the investment cost is by far the most important factor when deciding if a construction project is being realized or not. But decisions made in a geotechnical engineering project affect the environmental impact and monetary cost during the structure's entire life cycle. Life Cycle Assessment (LCA) and Life Cycle Cost Analysis (LCCA) are established methods for assessing such environmental impacts and monetary cost from construction works. The results can be used to make decisions to reduce the environmental impact and monetary cost in geotechnical engineering projects. However, limited research has been published in applying LCA and LCCA to geotechnical engineering. For example, Jefferis [2008] found that there was a lack of specific guidelines on how to implement sustainability in geotechnical engineering.

A life cycle assessment starts with a definition of the aim and scope of the study. Its main effort resides in the development of an inventory (LCI), in which all the significant environmental burdens from the life-time of the product or process will be quantified and compiled. This is followed by an impact assessment (LCIA) calculating and presenting the result in a predefined way that supports comparison or further analysis. The concept and working phases of LCA are described in the ISO14040 [ISO14040, 2006].

The application of LCA in civil engineering started initially as a tool for assessing solid waste management options. Because it has been thought for product development and supply chain impacts disclosure, it tends to be difficult to use in the case of civil engineering and particularly when it comes to large infrastructures. The amount of data required and the unpreparedness of the construction industry make a full LCA assessment for an infrastructure a postmortemized practice, while the tool should be a support to the decision-making process...

The concrete industry is probably the more advanced in adopting the tool, particularly because of its undeniable impact: besides giving the knowledge of products' environmental performance, LCA results are also able to support marketing or environmental labelling. For instance, the ISO14025 Type III Environmental Product Declaration (EPD), which enables the informed comparison between products that fulfil the same function, requires quantified environmental information based on independently verified LCA results [Huang et al, 2008].

5 Sustainability indicators and green drivers in geotechnics: tailoring a combined method

5.1 Combining sustainability indicators with the EU technical screening criteria

The EU regulation requires an explicit analysis to establish whether an economic activity could be considered to significantly harm, through the framework of the DNSH criteria and taking into account the life cycle of the products and services provided by it, including evidence from existing life-cycle assessments. When assessing an economic activity against the six targets set out above, both the environmental impact of the activity itself and the environmental impact of the products and services provided by it throughout its life cycle have to be taken into account, in particular by considering the production, use and end of life of those products and services.

The aim of the regulator is more about forcing investors, owners, designers, and constructors to set up a sustainability strategy for their projects instead of just a general purpose or a scattered series of environmentally friendly actions. At the same time, we think that a pure compliance verification against the six targets will not support the decision makers to evolve the nature of their projects. This is why we suggest, as a first step, the adoption of a general sustainability rating protocol based on well recognized indicators, defining a thought and complete sustainable approach to the project, that could properly combine performance and economic needs with social and environmental perspectives.

The Envision protocol [ISI, 2018] is well structured, solid and allows a simple preliminary approach that is very useful in the framing phase. This can be done by selecting the applicable indicators and identifying the appropriate leverages that play the critical role in sizing the sustainability rating of the project. This phase is crucial because it allows a fine tuning of the general strategy of the project and focuses the attention of the stakeholders on the environmental and social hotspots, apart from the technical performance or the cost in itself. Without this first framing, the focus on a sustainability strategy of the project will be weak and difficult to share among the stakeholders.

The application of Envision is useful also in the light of the EU Taxonomy. Following the path traced by ICMQ [ICMQ, 2022] it is possible to identify a connection between the Envision indicators and the six targets listed in the article 3 of the cited EU Regulation. This is a simple way to check the project against the DNSH criteria, giving the chance to use the Envision analysis as a reference metric also for EU compliance. With a fundamental integration: while the DNSH assessment deals only with the environment, the Envision protocol also takes into account the economic and social aspects, thus satisfying the three ESG factors. Most of the Envision credits have a direct impact on the objectives indicated in the 2020/852 Regulation, and within the protocol there are additional credits that contribute indirectly but effectively to the achievement of the objectives themselves.

Following our professional experience and being aware of the construction industry needs, we connected the ‘views’ of the EU regulation (that will set the stage for the next years) with a sustainability metric as the one that Envision declines through its protocol.

5.2 The guidelines from the Italian Ministry for Sustainable Infrastructure

Infrastructures constitute the backbone for the economic and social development of a territory, influencing its productivity, facilitating trade with other areas and markets, improving economic and social inclusion and ensuring its environmental and climatic sustainability. In this context, the ability of the public sector to select and evaluate the works to be financed in a systemic key is crucial to guarantee the decision-making and implementation process a reference framework that is able to combine in a synergistic way the economic, social and environmental dimensions and the aspects of technical-construction nature.

In this context, MIMS has decided to publish detailed methodological documents ("Operational Guidelines for Investments in Public Works") in order to provide the analytical reference framework for the preparation of project proposals relating to interventions in the areas of competence of the Ministry.

The Operating Guidelines, set out in separate documents for each sector of competence of the Ministry, are adopted by Decree of the Minister of Sustainable Infrastructures and Mobility and published on the institutional website and - as mentioned - will serve as a practical manual for both proposing and implementing subjects. during the preparation of feasibility projects, as for the STM called to support the competent DGs of the MIMS in evaluating the works for the purposes of their eligibility for public funding.

With D.M. of 7/12/2021, n. 496, the Ministry adopted the published first technical document dedicated to the railway sector; this document, on the other hand, is dedicated to the road sector and accurately describes the evaluation methodology to be applied to potential works financed by MIMS, through the main dimensions that characterize the sustainability of a project - economic, environmental, social and governance - as well as that the aspects of a transport nature strictly connected to the reference sector.

The Operating Guidelines, in recalling the general principles of ex-ante evaluation of investments in public works established in chapter 3 of the Guidelines (Ministerial Decree of 2017 n.300), further details the methodology of practical application.

As regards the analysis of investments in terms of environmental sustainability, this document takes as reference the Regulation (EU) 2020/852 (so-called "Taxonomy Regulation") and the Final Report of the Technical Group of Experts in charge of defining the Taxonomy to determine the substantial contribution to the environmental objectives relating to climate change in terms of mitigation and adaptation, published in March 2020 and the basis of the Delegated Regulation on climate objectives which was adopted by the EC in June 2021 (in force starting from 2022 as required by Regulation). At the same time, the Vademecum is directly inspired by the aforementioned regulation on the European Recovery and Resilience Device (RRF), as well as by the European Commission Communication 1054/2021, which details the methodology for applying the "Do not significant harm" principle (DNSH) within the RRF.

Finally, the Operating Guidelines identify a series of relevant criteria and dimensions for defining the contribution in terms of social sustainability and governance of the work, in line with European and international standards.

It will be necessary to clarify each time in which cases the interventions must be considered individually or within a broader investment program. The theme is of clear importance both for the fact that a single large project (for example a railway line) can be divided into a series of distinct interventions (the various sections or functional phases), as well as for the recurrence of large thematic containers in the investment programs, which make analysis difficult when individual interventions are small or inseparable by their very nature.

Therefore, these Operational Guidelines have the dual objective of standardizing the ex-ante evaluation methodology, in order to improve the comparability of projects, also including the non-intervention scenario, and of making the decision-making processes on evaluation transparent. of public works, also with reference to the preparation of the Pluriennial Planning Document (DPP) provided for in article no. 201, paragraph n. 1 of the Legislative Decree n. 50/2016 ("Public Contracts Code") and subsequent amendments and additions.

5.3 DNSH and Recovery and Resilience Plan

The importance given to this principle is fully confirmed in the Communication from the Commission dedicated to "Technical guidelines on the application of the principle" do not cause significant damage "pursuant to the Regulation on the mechanism for recovery and resilience."

This is the Regulation establishing the recovery and resilience facility (RRF, Recovery and Resilience Facility) which establishes that no measure included in a recovery and resilience plan (RRP, Recovery and Resilience

Plan) must cause damage to environmental objectives pursuant to Article 17 of the Taxonomy Regulation, i.e. 2020/852. Pursuant to the RRF regulation, in fact, the evaluation of RRFs must ensure that each individual measure (i.e. each reform and each investment) included in the plan complies with the principle "do not cause significant harm" (DNSH, "do no significant harm "). The RRF Regulation also establishes that the Commission provides technical guidance on how to apply the DNSH principle in the context of the RRF. Hence the communication from the Commission.

With it, in summary, the Commission establishes that Member States must provide a DNSH assessment for each individual measure of the respective RRF and that therefore it is not possible to positively assess the RRF if one or more measures do not comply with the DNSH principle. Therefore, the DNSH assessment should not be carried out at the level of the plan or the individual components of the plan, but at the measure level. And this applies both to the measures that are considered to contribute to the green transition and to all other measures included in the RRFs.

The close correlation between the RRF Regulation and the DNSH principle is established in the explicit reference to what is contained in Article 17 of Regulation 2020/852 where it defines the "significant damage" for the six environmental objectives. For the purposes of the RRF Regulation, DNSH is to be interpreted within the meaning of Article 17 of the Taxonomy Regulation. This article defines what constitutes 'significant harm' for the six environmental objectives covered by the Taxonomy Regulation:

1. An activity is considered to do significant harm to *climate change mitigation* if it leads to significant greenhouse gas (GHG) emissions;
2. An activity is considered to do significant harm to *climate change adaptation* if it leads to an increased adverse impact of the current climate and the expected future climate, on the activity itself or on people, nature or assets⁶;
3. An activity is considered to do significant harm to *the sustainable use and protection of water and marine resources* if it is detrimental to the good status or the good ecological potential of bodies of water, including surface water and groundwater, or to the good environmental status of marine waters;
4. An activity is considered to do significant harm to the *circular economy*, including waste prevention and recycling, if it leads to significant inefficiencies in the use of materials or in the direct or indirect use of natural resources, or if it significantly increases the generation, incineration or disposal of waste, or if the long-term disposal of waste may cause significant and long-term environmental harm;
5. An activity is considered to do significant harm to *pollution prevention and control* if it leads to a significant increase in emissions of pollutants into air, water or land;
6. An activity is considered to do significant harm to the *protection and restoration of biodiversity and ecosystems* if it is significantly detrimental to the good condition and resilience of ecosystems, or detrimental to the conservation status of habitats and species, including those of Union interest.

From 1 January 2022, the Commission Delegated Regulation EU 2021/2139 entered into force, which supplements the EU Regulation 2020/852 of the European Parliament and of the Council, establishing the technical criteria that determine the conditions for which an economic activity contributes in substantially to climate change mitigation or climate change adaptation and if it does not do significant harm to any other environmental objective.

5.4 EU Regulation 2020/852 Objectives

For the purposes of this Regulation, the following shall be environmental objectives:

1. Climate change mitigation.
2. Climate change adaptation.
3. Sustainable use and protection of water and marine resources.

4. Transition to a circular economy.
5. Pollution prevention and control.
6. Protection and restoration of biodiversity and ecosystems.

Objective 1: Substantial contribution to climate change mitigation

The regulation tells that an economic activity shall qualify as contributing substantially to climate change mitigation where that activity contributes substantially to the stabilization of greenhouse gas concentrations in the atmosphere at a level which prevents dangerous anthropogenic interference with the climate system consistent with the long-term temperature goal of the Paris Agreement through the avoidance or reduction of greenhouse gas emissions or the increase of greenhouse gas removals, including through process innovations or product innovations, by:

- a. generating, transmitting, storing, distributing or using renewable energy in line with Directive (EU) 2018/2001, including through using innovative technology with a potential for significant future savings or through necessary reinforcement or extension of the grid;
- b. improving energy efficiency, except for power generation activities as referred to in Article 19(3);
- c. increasing clean or climate-neutral mobility;
- d. switching to the use of sustainably sourced renewable materials;
- e. increasing the use of environmentally safe carbon capture and utilization (CCU) and carbon capture and storage (CCS) technologies that deliver a net reduction in greenhouse gas emissions;
- f. strengthening land carbon sinks, including through avoiding deforestation and forest degradation, restoration of forests, sustainable management and restoration of croplands, grasslands and wetlands, afforestation, and regenerative agriculture;
- g. establishing energy infrastructure required for enabling the decarbonization of energy systems;
- h. producing clean and efficient fuels from renewable or carbon-neutral sources.

Objective 2: Substantial contribution to climate change adaptation

An economic activity shall qualify as contributing substantially to climate change adaptation where that activity:

- a. includes adaptation solutions that either substantially reduce the risk of the adverse impact of the current climate and the expected future climate on that economic activity or substantially reduce that adverse impact, without increasing the risk of an adverse impact on people, nature or assets; or
- b. provides adaptation solutions that, in addition to satisfying the conditions set out in Article 16, contribute substantially to preventing or reducing the risk of the adverse impact of the current climate and the expected future climate on people, nature or assets, without increasing the risk of an adverse impact on other people, nature or assets.

Objective 3: Substantial contribution to the sustainable use and protection of water and marine resources

An economic activity shall qualify as contributing substantially to the sustainable use and protection of water and marine resources where that activity either contributes substantially to achieving the good status of bodies of water, including bodies of surface water and groundwater or to preventing the deterioration of bodies of water that already have good status, or contributes substantially to achieving the good environmental status of marine waters or to preventing the deterioration of marine waters that are already in good environmental status, by:

- a. protecting the environment from the adverse effects of urban and industrial waste water discharges, including from contaminants of emerging concern such as pharmaceuticals and microplastics, for example by ensuring the adequate collection, treatment and discharge of urban and industrial waste waters;
- b. protecting human health from the adverse impact of any contamination of water intended for human consumption by ensuring that it is free from any micro-organisms, parasites and substances that constitute a potential danger to human health as well as increasing people's access to clean drinking water;
- c. improving water management and efficiency, including by protecting and enhancing the status of aquatic ecosystems, by promoting the sustainable use of water through the long-term protection of available water resources, inter alia, through measures such as water reuse, by ensuring the progressive reduction of pollutant emissions into surface water and groundwater, by contributing to mitigating the effects of floods and droughts, or through any other activity that protects or improves the qualitative and quantitative status of water bodies;
- d. ensuring the sustainable use of marine ecosystem services or contributing to the good environmental status of marine waters, including by protecting, preserving or restoring the marine environment and by preventing or reducing inputs in the marine environment.

Objective 4: Substantial contribution to the transition to a circular economy

An economic activity shall qualify as contributing substantially to the transition to a circular economy, including waste prevention, re-use and recycling, where that activity:

- a. uses natural resources, including sustainably sourced bio-based and other raw materials, in production more efficiently, including by:
 - i. reducing the use of primary raw materials or increasing the use of by-products and secondary raw materials; or
 - ii. resource and energy efficiency measures;
- b. increases the durability, reparability, upgradability or reusability of products, in particular in designing and manufacturing activities;
- c. increases the recyclability of products, including the recyclability of individual materials contained in those products, inter alia, by substitution or reduced use of products and materials that are not recyclable, in particular in designing and manufacturing activities;
- d. substantially reduces the content of hazardous substances and substitutes substances of very high concern in materials and products throughout their life cycle, in line with the objectives set out in Union law, including by replacing such substances with safer alternatives and ensuring traceability;
- e. prolongs the use of products, including through reuse, design for longevity, repurposing, disassembly, remanufacturing, upgrades and repair, and sharing products;
- f. increases the use of secondary raw materials and their quality, including by high-quality recycling of waste;
- g. prevents or reduces waste generation, including the generation of waste from the extraction of minerals and waste from the construction and demolition of buildings;
- h. increases preparing for the re-use and recycling of waste;
- i. increases the development of the waste management infrastructure needed for prevention, for preparing for re-use and for recycling, while ensuring that the recovered materials are recycled as high-quality secondary raw material input in production, thereby avoiding downcycling;
- j. minimizes the incineration of waste and avoids the disposal of waste, including landfilling, in accordance with the principles of the waste hierarchy;
- k. avoids and reduces litter.

Objective 5: Substantial contribution to pollution prevention and control

An economic activity shall qualify as contributing substantially to pollution prevention and control where that activity contributes substantially to environmental protection from pollution by:

- a. preventing or, where that is not practicable, reducing pollutant emissions into air, water or land, other than greenhouse gasses;
- b. improving levels of air, water or soil quality in the areas in which the economic activity takes place whilst minimizing any adverse impact on, human health and the environment or the risk thereof;
- c. preventing or minimizing any adverse impact on human health and the environment of the production, use or disposal of chemicals;
- d. cleaning up litter and other pollution.

Objective 6: Substantial contribution to the protection and restoration of biodiversity and ecosystems

An economic activity shall qualify as contributing substantially to the protection and restoration of biodiversity and ecosystems where that activity contributes substantially to protecting, conserving, or restoring biodiversity or to achieving the good condition of ecosystems, or to protecting ecosystems that are already in good condition, through:

- a. nature and biodiversity conservation, including achieving favorable conservation status of natural and semi-natural habitats and species, or preventing their deterioration where they already have favorable conservation status, and protecting and restoring terrestrial, marine and other aquatic ecosystems in order to improve their condition and enhance their capacity to provide ecosystem services;
- b. sustainable land use and management, including adequate protection of soil biodiversity, land degradation neutrality and the remediation of contaminated sites;
- c. sustainable agricultural practices, including those that contribute to enhancing biodiversity or to halting or preventing the degradation of soils and other ecosystems, deforestation and habitat loss;
- d. sustainable forest management, including practices and uses of forests and forest land that contribute to enhancing biodiversity or to halting or preventing degradation of ecosystems, deforestation and habitat loss.

Enabling activities

An economic activity shall qualify as contributing substantially to one or more of the environmental objectives set out in Article 9 by directly enabling other activities to make a substantial contribution to one or more of those objectives, provided that such economic activity:

- a. does not lead to a lock-in of assets that undermine long-term environmental goals, considering the economic lifetime of those assets; and
- b. has a substantial positive environmental impact, on the basis of life-cycle considerations.

5.5 Significant harm to environmental objectives

For the purposes of point (b) of Article 3, taking into account the life cycle of the products and services provided by an economic activity, including evidence from existing life-cycle assessments, that economic activity shall be considered to significantly harm:

- a. Climate change mitigation, where that activity leads to significant greenhouse gas emissions.
- b. Climate change adaptation, where that activity leads to an increased adverse impact of the current climate and the expected future climate, on the activity itself or on people, nature or assets.

- c. Sustainable use and protection of water and marine resources, where that activity is detrimental:
 - i. to the good status or the good ecological potential of bodies of water, including surface water and groundwater; or
 - ii. to the good environmental status of marine waters.
- d. Circular economy, including waste prevention and recycling, where:
 - i. that activity leads to significant inefficiencies in the use of materials or in the direct or indirect use of natural resources such as non-renewable energy sources, raw materials, water and land at one or more stages of the life cycle of products, including in terms of durability, reparability, upgradability, reusability or recyclability of products;
 - ii. that activity leads to a significant increase in the generation, incineration or disposal of waste, with the exception of the incineration of non-recyclable hazardous waste; or
 - iii. the long-term disposal of waste may cause significant and long-term harm to the environment.
- e. Pollution prevention and control, where that activity leads to a significant increase in the emissions of pollutants into air, water or land, as compared with the situation before the activity started; or
- f. the protection and restoration of biodiversity and ecosystems, where that activity is:
 - i. significantly detrimental to the good condition and resilience of ecosystems; or
 - ii. detrimental to the conservation status of habitats and species, including those of Union interest.

When assessing an economic activity against the criteria set out above, both the environmental impact of the activity itself and the environmental impact of the products and services provided by that activity throughout their life cycle shall be taken into account, in particular by considering the production, use and end of life of those products and services.

5.6 The Envision protocol in the light of measuring DNSH objectives

In this context, due to the lack of certain parameters within the guidelines, the difficulty of measuring the sustainability of infrastructures has emerged. An important help for stakeholders (professionals, companies, administrations, citizens) comes from the Envision protocol of ISI (Institute for Sustainable Infrastructure), promoted in Italy by ICMQ - Institute of certification and quality mark for construction products and services.

The Envision protocol is therefore the ideal tool for measuring the status of the six objectives DNSH and obtain a sustainability certification compliant with EU requirements.

With a fundamental integration: while the DNSH assessment deals only with the environment, the Envision protocol also takes into account the economic and social aspects, thus satisfying the three ESG factors. Envision credits allow you to assess the sustainability of infrastructures by measuring the effects they produce on every aspect of human life and the surrounding environment. In a period in which environmental certification assumes an increasingly strong role in the world of building and construction, ICMQ promotes a rating system that stimulates and enhances design and construction best practices also in the infrastructure sector.

Most of the Envision credits have a direct impact on the objectives indicated in the 2020/852 Regulation, but not only: within the protocol there are additional credits that contribute indirectly but effectively to the achievement of the objectives themselves.

The sustainability certification obtained through the compliance of the project with the requirements set by the credits of the Envision protocol therefore represents an important contribution to creating works that comply with what is indicated by the Do No Significant Harm principle.

5.7 A dedicated assessment for ground improvement projects that fosters EU DNSH criteria through Envision

One of the aims of our research is to create a state-of-the-art sustainability and resiliency assessment for ground improvement techniques, as said in the introductory part of this report. Following our professional experience and being aware of the construction industry needs, we decided to connect the ‘views’ of the EU regulation (that will set the stage for the next years) with a sustainability metric as the one that Envision declines through its protocol.

This way we will have built a tool that has a regulatory blessing (it can be used to state the compliance to the DNSH criteria) and the holistic approach of a 360° degree international protocol (that has the weakness of not being cogent).

We will make use of the guidelines produced by the Italian Institute for Sustainable Infrastructure and ICMQ (that represents the Envision organization in Italy) (ICMQ, 2022).


5.8 Correspondence between DNSH and ENVISION

As a first step we scanned the whole set of Envision credits (64 overall, divided in 5 categories, as said) in order to identify the correspondences between the Envision approach and the UE requirements.

This way, the adapted assessment that we will obtain, could be a useful tool for the industry in order to evaluate the sustainability of different ground improvement solutions, in particular, and the whole geotechnical project in itself, in general.

In the first category, quality of life, we improved the cited approach of ICMQ and then reduces the number of applicable credits to our specific cases.

The lines with the applicable Envision credits in each category have been crossed with each of the 6 EU objectives, and with each of the subcase cited in the Regulation (and listed above). This way, once the score is assigned to a credit there will be a full trackability of its value under the DNSH evaluation.

		Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
 Quality of Life	Wellbeing	QL1.1 Improve Community Quality of Life	26	-	-	-	-	-
		QL1.2 Enhance Public Health & Safety	20	-	-	-	b, c, d	-
		QL1.3 Improve Construction Safety	14	-	-	-	c, d	-
		QL1.4 Minimize Noise & Vibration	12	-	-	-	-	-
		QL1.5 Minimize Light Pollution	12	-	-	-	-	-
		QL1.6 Minimize Construction Impacts	8	-	-	-	-	-
	Mobility	QL2.1 Improve Community Mobility	14	-	-	-	-	-
		QL2.2 Encourage Sustainable Transportation	16	c	-	-	-	-
		QL2.3 Improve Access & Wayfinding	14	-	-	-	-	-
	Community	QL3.1 Advance Equity & Social Justice	18	-	-	-	-	-
		QL3.2 Preserve Historic & Cultural Resources	18	-	-	-	-	-
		QL3.3 Enhance Views & Local Character	14	-	-	-	-	-
		QL3.4 Enhance Public Space & Amenities	14	-	-	-	-	-

Tab. 5-1, Selected indicators for Quality of Life.


The 13 credits for quality of life, have, following the ICMQ approach, few connections with the EU sustainability objectives. It is more about the OBJ 5 around pollution prevention. Driving down the credits to ground improvement context we considered applicable also those credits where the construction methods could impact on the quality of life of the stakeholders, particularly the credits from QL1.3 to QL1.5. All the others could be better taken into account when assessing a more general project that a specific geotechnical one. These are the credits applicable in the framework for ground improvement techniques:

- **QL1.2 Enhance Public Health & Safety, related to DNSH OBJ5 subpoints b, c, d.**
 - Any Envision project must meet all safety and health regulations as required by law. This credit recognizes the opportunities many projects have to exceed minimum regulatory requirements, or to improve health and/or safety within a project or community in other ways.

The credit assesses the degree to which infrastructure projects contribute to increased safety and health benefits on the project site, surrounding sites, and the broader community. Envision does not in any way replace, supersede, or create exceptions for existing local, state/provincial, or national health and safety regulations.

- Project teams and owners should consider how improving the safety and health benefits of the project, its surroundings, and the broader community, and communicating these benefits to stakeholders, can help combat negative perceptions that lead to conflicts and project delays (e.g., “NIMBY”). Enhancing and emphasizing positive health and safety benefits can help change public perception about the value of infrastructure.
- **QL1.3 *Improve Construction Safety, related to DNSH OBJ5, subpoints c, d.***
 - This credit addresses the critical goal of improving health and safety practices during construction. Having and promoting a common focus on health and safety throughout the construction industry has benefits that extend beyond the individual project.
 - Improved construction safety can also have benefits beyond the protection of health and human life. Companies that have a record in job site safety attract better employees, have higher retention rates, and are more competitive in the marketplace. The rigor of applying, training, and adhering to health and safety procedures can also increase productivity by standardizing job site activities.
 - Enhanced health and safety practices are encouraged beyond industry norms. However, a novel approach may introduce risks that were not present prior to instituting the new program or technology. Project teams should conduct hazard analyses and develop construction safety plans to address risks associated with using new materials, technologies, and/or methodologies.
 - Days Away, Restrictions, or Transfers (DART) rates are a mathematical calculation of the number of recordable incidents per 100 full-time employees that resulted in lost or restricted days or job transfer due to work-related injuries or illnesses. From this data, many leading construction companies find that the return on investment for implementing better health and safety standards is higher than the cost and lost time associated with job site incidents.
- **QL1.4 *Minimize Noise & Vibration.***
 - This credit addresses noise and vibrations during project operations. Credit QL1.6 Minimize Construction Impacts addresses construction-related noise and vibrations. “Noise” is defined as an unwanted or disturbing sound. It becomes unwanted when it interferes with normal activities or diminishes quality of life.
 - Noise is a common complaint against a wide variety of infrastructure projects. Noise can have significant negative health effects, including hearing impairment, hypertension, and sleep disturbance. It can also reduce performance in cognitive tasks. Residential property values may be improved as a result of reduced ambient noise levels. Noise pollution can also interfere with animal communication, predator-prey relations, and mating habits, particularly among birds.
 - Addressing operational noise is an important step for incorporating infrastructure into communities and the environment. This is particularly true during stakeholder engagement to demonstrate that community concerns are being heard. Setting noise reduction targets can often provide an impetus to consider creative and innovative alternative solutions.
- **QL1.5 *Minimize Light Pollution.***
 - This credit follows the guidelines of the Model Lighting Ordinance issued by the International Dark-Sky Association and the Illuminating Engineering Society (IES) of North America. The Model Lighting Ordinance outdoor lighting template utilizes the IES TM-15-11 “BUG” (Backlight, Uplight, and Glare) classification of outdoor lighting fixtures and is designed to

- help municipalities develop outdoor lighting standards that reduce glare, light trespass, and skyglow.
- High levels of ambient light are undesirable for humans from both an aesthetic and health perspective. Light pollution has the potential to disrupt circadian rhythms and human sleep patterns, which may have numerous health implications. Light spillage also disturbs nocturnal animals and interferes with sensitive environments, including open space, wilderness parks and preserves, areas near astronomical observatories, and other light-sensitive habitats. Finally, the cumulative exterior light directed upward into the sky because of inappropriate lighting represents a massive waste of energy.
- Well-designed lighting can maintain adequate light levels on the ground while reducing light pollution by using lighting more efficiently. Many cities and communities may be using more light than is necessary and could benefit from a lighting-needs audit and assessment. By directing light only to where it is needed, project lighting can be more efficient and save costs.
- **QL1.6 Minimize Construction Impacts.**
 - Infrastructure projects are long-term projects that may take years to complete construction. During this time, it is important for the project to have minimal negative impacts on the surrounding community. While completed infrastructure projects may go unseen by the public, the construction phase is often a time when a new project is most visible. Project teams can harness this as an opportunity to exemplify best practices. In doing so, they instill trust in the community, and can make further strides toward project acceptance.
 - There are a range of ways a project team can consider a community’s needs during the construction phase. Similar to the operational impacts on a community, project teams consider the same impacts during construction because they may be elevated in this phase. Noise, vibrations, and light pollution should be minimized during construction so as to reduce disturbances to surrounding communities. Further, projects in construction should never impede on a community’s safety or mobility.

			Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
 Leadership	Collaboration	LD1.1 Provide Effective Leadership & Commitment	18	-	-	-	-	-	-
		LD1.2 Foster Collaboration & Teamwork	18	-	-	-	-	-	-
		LD1.3 Provide for Stakeholder Involvement	18	-	-	-	-	-	-
		LD1.4 Pursue Byproduct Synergies	18	-	-	-	a, c, e, f, g, h, j, k	-	-
	Planning	LD2.1 Establish a Sustainability Management Plan	18	-	-	-	-	-	-
		LD2.2 Plan for Sustainable Communities	16	-	-	-	b, e	-	-
		LD2.3 Plan for Long-Term Monitoring & Maintenance	12	-	-	-	b, e	-	-
		LD2.4 Plan for End-of-Life	14	-	-	-	-	-	-
	Economy	LD3.1 Stimulate Economic Prosperity & Development	20	-	-	-	-	-	-
		LD3.2 Develop Local Skills & Capabilities	16	-	-	-	-	-	-
		LD3.3 Conduct a Life-Cycle Economic Evaluation	14	-	-	-	-	-	-

Tab. 5-2, Selected indicators for Leadership.

When it comes to the 11 credits of the category of Leadership, the connection between EU and Envision is focused on the synergies for reuse of by-products, both to match the objectives of circular economy and of pollution prevention. We decided to significantly reduce the credits applicable to the ground improvement cases mainly because of their more ‘general’ applicability and we kept those related to life cycle and sustainability management because they are an important part of the case studies that we will analyze. These are the credits considered applicable to our case:


- **LD1.4 Pursue Byproduct Synergies, related to DNSH OBJ4, subpoints a, c, e, f, g, h, j, k.**
 - Though byproducts are most commonly thought of as solid waste, they may include a wide variety of excess resources. True byproduct synergy, or reuse, involves identification and cost-effective use of unwanted waste or excess resources (e.g., materials, energy/heat, gas emissions, effluent, water, services, capacity). Byproduct synergies can be accomplished in

two ways: finding opportunities for a project's excess resources to be beneficially reused off site, or incorporating off-site excess resources into the project.

- The term “byproduct synergy” may also be known as “industrial ecology,” through its expression in “eco-industrial parks,” or by the broader concepts of “circular economy.” Whatever the preferred terminology, the classification of excess resources or services as “waste” is inherently inefficient. Everything has value. In a circular economy, all excess resources or services are directed to local beneficial use. These interconnected systems are more resilient by eliminating waste and reducing dependence on external sources. True circular economies are rare, but every project can contribute toward growing circular economies by investigating opportunities for beneficial reuse.
- **LD2.1 *Establish a Sustainability Management Plan, related to DNSH OBJ4, subpoints b, e.***
 - This credit addresses the importance of supporting the achievement of sustainability goals through the structure of plans and policies. Given the long timelines, complex interorganizational cooperation, and varied consultants and contractors, it is critical to have a sustainability management plan to establish expectations and ensure that sustainability goals and objectives are communicated and carried through project delivery. When time and budgets are limited, sustainability criteria must have this level of institutional support in order to be successful. By clearly establishing roles, responsibilities, and expectations, project owners and project teams realize efficiencies in avoided conflicts, duplications, or miscommunication. Having a clear prioritization of goals helps consultants and contractors correctly devote their time and resources in order to deliver the best possible project for their client.
 - A sustainability management plan enables an organization to set goals, objectives, and policies; instigate plans and programs; review performance against a plan; and take corrective actions across the full dimensions of sustainability. The International Organization for Standardization (ISO) 14004 standard for social and environmental management plans provides guidance on developing a sustainability management plan.
- **LD3.3 *Conduct a Life-Cycle Economic Evaluation, related to DNSH OBJ4, subpoints b, e.***
 - This credit provides incentives for, and recognition of, the use of sound, industry-accepted economic analysis to provide a better measurement of the value of a project and ultimately encourage greater levels of sustainability. Taking a life-cycle economic approach to project evaluation can enhance decision making by encouraging the effective management of resources and assets that ultimately lead to more sustainable projects. Life-cycle economic evaluations allow for a comprehensive assessment to better understand the trade-offs of upfront capital costs and the longer-term anticipated operational savings that may accrue from sustainable design. An intended outcome of infrastructure is often to generate benefits and/or reduce negative impacts to the community, the environment, and broader society. Economic analysis can be used to measure and value these benefits, which are typically assessed only qualitatively.
 - Using rigorous economic analysis to more fully assess investments can help organizations best use its funds among competing capital projects. By using a life-cycle approach, design alternatives can be compared on a present value basis, which may ultimately prove the business case for more sustainable projects.
 - Life-cycle cost analysis (LCCA) is one of several evaluation techniques commonly used to compare and evaluate the financial feasibility of various design alternatives over an assumed service life cycle. LCCA provides a more informed perspective of the total financial costs of the project and allows a more direct comparison of competing projects. At a minimum it is necessary to make sure the project is assessing capital, operations and management, replacement cost, and any residual value over a consistent time period for all alternatives,

- while incorporating discounting techniques to factor in the time-value-of-money to compare multiple different projects on a common basis.
- While life-cycle cost analysis provides greater rigor and insight in the planning process, it does not assess the social and environment benefits generated by the project. A comprehensive sustainability cost benefit analysis measures the broader financial, social, and environmental benefits of the project. This extended analysis further quantifies those impacts and then monetizes them. A sustainability cost benefit analysis adds the monetary values of social and environmental impacts to the life-cycle financial results (LCCA) to comprehensively measure the sustainability impacts. It allows a direct assessment of the trade-offs for varying levels of financial costs, environmental quality, social impacts, and resiliency, and allows decision makers to identify those projects that are the most-beneficial and cost-effective.
 - Often, upfront capital costs are the key driver in planning decisions; however, this omits the life-cycle costs of the project, risks and uncertainty, or the broader outcomes that impact the environment and society. As a result, owners may overlook sustainability-related investments with higher upfront capital costs, but which ultimately produce cost savings over the life-cycle of the project from lower utility costs, operations and maintenance costs, or less replacement costs.
 - There is significant guidance that can be found regarding the specific steps to follow in conducting a life-cycle economic evaluation. There is no one prescribed approach that is recommended for this credit; however, a general approach is as follows:
 - Define the base case.
 - List feasible alternatives including no-build—these can be design elements or entire projects.
 - Specify categories of costs and benefits.
 - Quantify costs and benefits as incremental to the base case.
 - Monetize costs and benefits.
 - Identify and incorporate risks into the analysis.
 - Discount future cash flows to calculate net present value.

We decided to keep also the LD2.1 and LD3.3 credits because of their relevance with respect to life cycle assessment, that will become instrumental in the next phases of our research.


			Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
 Leadership	Collaboration	LD1.1 Provide Effective Leadership & Commitment	18	-	-	-	-	-	-
		LD1.2 Foster Collaboration & Teamwork	18	-	-	-	-	-	-
		LD1.3 Provide for Stakeholder Involvement	18	-	-	-	-	-	-
		LD1.4 Pursue Byproduct Synergies	18	-	-	-	a, c, e, f, g, h, j, k	-	-
	Planning	LD2.1 Establish a Sustainability Management Plan	18	-	-	-	-	-	-
		LD2.2 Plan for Sustainable Communities	16	-	-	-	b, e	-	-
		LD2.3 Plan for Long-Term Monitoring & Maintenance	12	-	-	-	b, e	-	-
		LD2.4 Plan for End-of-Life	14	-	-	-	-	-	-
	Economy	LD3.1 Stimulate Economic Prosperity & Development	20	-	-	-	-	-	-
		LD3.2 Develop Local Skills & Capabilities	16	-	-	-	-	-	-
		LD3.3 Conduct a Life-Cycle Economic Evaluation	14	-	-	-	-	-	-

Tab. 5-3, Selected indicators for Resource Allocation.

Obviously, being the EU policy focused on the ecological transition of the economy, the 13 credits of the Resource Allocation category are among of the most deeply connected with the taxonomy objectives. Following the same method used for the other categories, the applicable credits are those related to green procurement practices, recycled material, waste management in the construction site. Similarly, it goes for construction energy consumption and the use of renewable energy and, most important, the management of water use and management onsite during construction. These are the applicable credits:

- ***RA1.1 Support Sustainable Procurement Practices, related to DNSH OBJ4, OBJ5, OBJ6, subpoint d for all.***
 - This credit encourages choosing suppliers that incorporate sustainability into their policies and daily practices and operations. Project teams should give preference to suppliers that have taken into account the environmental, economic, and social impacts of their products and have active programs in place for performance improvement.
 - Infrastructure projects are major consumers of materials, and owners should consider their ability to influence higher sustainability performance upstream in the material manufacturing chain. As owners and project teams request and require sustainability disclosures, this information will become increasingly available and easier to obtain. Such changes have already occurred in the material supply chains for buildings. While this credit is linked to CR1.1 Reduce Net Embodied Carbon, it expands beyond the impacts of per unit material production to include the environmental impacts of the entire manufacturing process.
 - Supplier integrity and ethical behavior are important considerations. Establishing policies for the procurement of sustainably manufactured products and materials helps safeguard the reputation and achievements of the project, and all organizations involved, from the possibility of future disclosures that project materials were produced in unsafe or environmentally damaging conditions.
- ***RA1.2 Use Recycled Materials, related to DNSH OBJ4, subpoints c, e, j and OBJ1, subpoint d.***
 - The purpose of this credit is to reduce the use of virgin natural resources and avoid sending useful materials to landfills. Using recycled, reused, and renewable materials and products, including existing structures and materials on site, reduces demand for virgin materials and the embodied carbon emissions and environmental degradation attributed to their extraction and processing. Using these materials also reduces waste and supports the market for recycled and reused materials. Project teams should consider how salvaging or repurposing existing materials or structures can significantly reduce demand for new construction materials as well as project costs. The reuse of existing materials or elements may also have a significant cultural or aesthetic value, such as street lamps, sidewalk pavers, bridges, and more.
- ***RA1.4 Reduce Construction Waste, related to DNSH OBJ1, subpoint c and OBJ4 subpoints f, g, h, j, k.***
 - The goal of this credit is to reduce construction waste and divert waste streams from disposal to recycling and reuse. Project teams can improve performance by considering the ability of waste generated during construction to be recycled or beneficially reused, implementing waste management plans to capture waste, and identifying possible recycling centers with appropriate capabilities.
 - When considering the extra time or effort involved in collecting and diverting construction waste, consideration should be given to cost savings in dumping fees. Additionally, some recycled materials such as scrap metal have a positive value. Achieving high rates of construction waste diversion is often about the institutional training and operating procedures of the organizations and companies involved. Infrastructure owners should consider these capabilities when choosing project teams.
- ***RA2.2 Reduce Construction Energy Consumption, related to DNSH OBJ1, subpoint c.***
 - This credit addresses the important need to reduce construction energy consumption. As construction energy use is closely linked to emissions, many actions in this credit address energy efficiency, energy reduction, renewable energy use, and reduced emissions. Therefore, in addition to other Resource Allocation credits, RA2.2 Reduce Construction Energy
 - Consumption is also connected to CR1.1 Reduce Net Embodied Carbon, and CR1.2 Reduce Greenhouse Gas Emissions.

- Significant cost savings can be achieved by reducing fuel consumption during construction. Project teams should consider the secondary and tertiary benefits of reduced truck trips, improved air quality, and support for renewable energy systems. While single actions like replacing fluorescent lights with light emitting diodes (LEDs) is a positive first step, large energy savings can be achieved when considering broader construction logistics and coordination.
- **RA2.3 Use Renewable Energy, related to DNSH OBJ1, subpoint c.**
 - While reducing energy use is the primary goal, a net-zero energy society will require significant investment in renewable energy sources. When appropriate, renewable energy can be generated on site to help reduce the need for fossil fuel sources. However, it is important to note that large-scale off-site renewable energy sources, such as wind farms, large hydroelectric facilities, or solar arrays, are often more efficient. It can be challenging to demonstrate a direct connection to these sources and ensure that their energy generation is not double-counted by other projects. Project teams should evaluate the feasibility of renewable energy, including nontraditional energy sources, to effectively increase the portion of operational energy that comes from renewable sources.
- **RA3.3 Reduce Construction Water Consumption, related to DNSH OBJ3, subpoints b. c.**
 - This credit addresses the potential to reduce water consumption during construction. Overuse of water not only depletes waterbodies and lowers groundwater levels, but the treatment of water consumes large amounts of energy. In many cases, it is not necessary to use potable (i.e., drinkable) water for the intended task. Greywater (e.g., water that has been used for cleaning or other purposes and has not come into contact with feces), recycled water, and stormwater are alternatives to potable water use, especially in construction. Reducing water consumption during construction can reduce the environmental impact of the project.

			Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
 Natural World	Siting	NW1.1 Preserve Sites of High Ecological Value	22	f	-	-	-	-	a, d
		NW1.2 Provide Wetland & Surface Water Buffers	20	-	-	c	-	-	a
		NW1.3 Preserve Prime Farmland	16	f	-	-	-	-	c
		NW1.4 Preserve Undeveloped Land	24	f	-	-	-	-	b, d
	Conservation	NW2.1 Reclaim Brownfields	22	-	-	-	-	a, c, d	b
		NW2.2 Manage Stormwater	24	-	a, b	a	-	a	-
		NW2.3 Reduce Pesticide & Fertilizer Impacts	12	f	-	a, c	-	a	b, d
		NW2.4 Protect Surface & Groundwater Quality	20	-	-	d	-	a	a
	Ecology	NW3.1 Enhance Functional Habitats	18	-	-	-	-	-	a, d
		NW3.2 Enhance Wetland & Surface Water Functions	20	-	-	c, d	-	-	a
		NW3.3 Maintain Floodplain Functions	14	f	a, b	c	-	-	a
		NW3.4 Control Invasive Species	12	-	-	-	-	-	b, d
		NW3.5 Protect Soil Health	8	f	-	-	-	a	b, d


Tab. 5-4, Selected indicators for Natural World.

The category of Natural World, with its 13 credits, is very much related with the final scope of the project that the ground treatment is a ‘special’ part of. Therefore, many credits have been considered non applicable: we decided to keep those related with stormwater and to the protection of soil health because they are very relevant to geotechnics. These are the credits:

- **NW2.2 Manage Stormwater, related to DNSH OBJ2, subpoints a,b and OBJ3, subpoint a and OBJ5, subpoint a.**
 - Stormwater is an increasing concern and source of risk for communities. Climate change is making precipitation rates increasingly unpredictable, with more intense storms becoming common. Historic design standards and regulations may not be sufficient to prepare communities for the future. Infrastructure owners should consider how taking opportunities to improve stormwater management systems reduces their risk exposure. There are significant cost savings in addressing stormwater outside wastewater treatment facilities. Reducing the

- demand on wastewater treatment prolongs the ability of existing facilities to provide sufficient capacity without need for expansion.
- Improperly managed stormwater can have serious environmental impacts. Increased surface runoff typically leads to increased stream and channel erosion, downstream flooding, water temperatures (and thereby lowered dissolved oxygen in receiving waters), and concentration of pollutants reaching surface waters. It can deposit sediment and pollutants into waterways and warm historically cold-water streams. This can negatively impact aquatic life as native species are replaced with more pollutant-tolerant warm-water species.
 - Natural systems for stormwater management, often referred to as “green infrastructure,” provide multiple benefits. Bioswales and rain gardens can provide community beautification, reduce heat islands, and present an opportunity to educate the public on the importance of stormwater management. Project teams should consider how incorporating low-impact development measures can reduce and mitigate potential negative impacts associated with increased runoff.
- ***NW2.4 Protect Surface & Groundwater Quality, related to DNSH OBJ3, subpoint d and OBJ5, subpoint a and OBJ6, subpoint a.***
 - The goal of this credit is to preserve water resources by incorporating measures to prevent pollutants from contaminating surface water and groundwater and monitor impacts during construction and operations. Groundwater is a widely used source of drinking water. Protecting wellheads and groundwater recharge areas reduces the chances of groundwater contamination and protects natural water purification processes. In addition, aquatic ecosystems depend on a particular set of water conditions. Changes to any of these factors can adversely affect aquatic life and groundwater quality. Aquatic ecosystems are threatened by changes in pH, decreases in water clarity, and increases in temperature, dissolved solids, coliform bacteria, toxic substances, and nutrients (especially phosphorus and nitrogen).
 - Leaks, spills, and other sources of contamination have serious environmental, social, and economic costs with prevention almost always being more economical than cleanup. Contamination takes many forms but can kill flora and fauna, destroy habitats, and cause illness or premature death in humans.
 - Concerns regarding equipment and facilities containing potentially polluting substances include fuel and chemical storage, pipelines, piles of raw materials, and process areas. At the construction stage, potential sources of groundwater and surface water contamination include spills and leaks from tanks, pipes, and construction vehicles; leaching of pollutants from raw or waste materials; and releases of pollutants from the demolition of previously completed projects.
 - ***NW3.5 Protect Soil Health related to DNSH OBJ1, subpoint f and OBJ5, subpoint a and OBJ6, subpoint b,d.***
 - Climate, organisms, relief, parent material, and time (CORPT) are the factors of soil formation. Given enough time, if all other factors are held constant, soils that have been mechanically disturbed can naturally restore themselves. However, because soil formation is slow, the natural process of soil recovery can take millennia. Various human activities can be used to enhance the ability of mechanically disturbed soils to function as they did before being disturbed. This process is referred to as “soil restoration.” The details of which activities should be used are highly dependent on the original soil type, the factors that formed it, and the functions that land managers wish to recover. In the context of this credit, soil restoration refers to the quality and condition of the soil and does not refer to keeping soil on site (this is addressed in RA1.5 Balance Earthwork on Site).
 - Construction activities can disturb soil health in many ways, the most common being compaction. Disturbed soils cannot hold water, nutrients, or carbon as well as natural,

undisturbed soils. Disturbed soil is less capable of absorbing floodwaters or sustaining vegetation. Compaction caused by construction equipment can kill surrounding plants and trees, and prevent future plant growth.

		Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6	
 Climate and Resilience	Emissions	CR1.1 Reduce Net Embodied Carbon	20	d	-	-	c, d	-	
		CR1.2 Reduce Greenhouse Gas Emissions	26	e, f	-	-	-	-	
		CR1.3 Reduce Air Pollutant Emissions	18	-	-	-	-	a, b	
	Resilience	CR2.1 Avoid Unsuitable Development	16	-	a, b	c	-	-	-
		CR2.2 Assess Climate Change Vulnerability	20	-	a, b	-	-	-	-
		CR2.3 Evaluate Risk and Resilience	26	-	a, b	c	-	b	-
		CR2.4 Establish Resilience Goals and Strategies	20	-	-	-	-	-	-
		CR2.5 Maximize Resilience	26	-	-	-	-	-	-
		CR2.6 Improve Infrastructure Integration	18	-	-	-	-	-	-

Tab. 5-5, Selected indicators for Climate and Resilience.






Finally, the last category, Climate and Resilience, with 9 credits, where the connection between EU and Envision is very much related with greenhouse emissions.

- **CR1.1 Reduce Net Embodied Carbon related to DNSH OBJ1, subpoint b and OBJ4, subpoints c and d.**
 - This credit addresses the embodied carbon of materials used over the life of the project. This combines concepts of sourcing local materials, using materials more efficiently, and using lower-impact materials in order to reduce the combined environmental impacts of material use. In the calculations, carbon is used as a proxy unit of measure to compare various impacts across the entire supply chain of material consumption. One stage of this supply chain involves raw material extraction/harvesting, refinement, and manufacturing into products. The second involves transportation of the materials from the manufacturer to their final destination on site. By designing projects to use less material, use material efficiently, or specifying materials with lower embodied carbon, as well as reducing transportation distances, project teams can reduce the overall impact of the project.
 - Material use is specifically addressed over the life of the project, including the necessary replacement or renewal of materials. Often, materials with slightly higher initial embodied carbon will have a lower net embodied carbon over the life of the project if they are more durable and less likely to require repair or replacement.
- **CR1.2 Reduce Greenhouse Gas Emissions, related to DNSH OBJ1, subpoints e, f.**
 - This credit addresses greenhouse gas emissions during operations and the project’s contribution in reducing the impacts of climate change. The embodied carbon of materials is specifically addressed in CR1.1 Reduce Net Embodied Carbon. Emission of greenhouse gases during construction is addressed in RA2.2 Reduce Construction Energy Consumption.
 - The increased release of carbon dioxide (CO₂) and other greenhouse gases (GHGs) has caused a significant increase in the concentration of CO₂ in the atmosphere, enhancing the greenhouse effect. The subsequent increase in the average temperature of the earth’s surface causes various cascading effects, including melting glaciers, arctic sea ice loss, sea level rise, increased ocean temperatures, increased ocean acidity, changing vegetation patterns, increased range of disease vectors, decreased snowmelt, changing precipitation patterns, increased flooding, increased storm intensity, and increased storm frequency, to name a few. This can have many unintended consequences such as flooding when historic periods of snowfall change to rain, drought from increased evaporation and lack of snowmelt, loss of coral reefs and aquatic biodiversity from ocean acidification, and food scarcity as increased temperatures reduce crop production. Reducing the emission of GHGs now will help mitigate the effects of climate change in the future.

- **CR1.3 Reduce Air Pollutant Emissions, related to DNSH OBJ5, subpoints a, b.**
 - The criteria pollutants include carbon singlexide, nitrogen oxides, sulfur dioxide, suspended particulate matter smaller than PM-10, ozone, lead, and volatile organic compounds. These pollutants damage human health, property, and the environment. Those most at risk are children, the elderly, and people with lung diseases such as asthma, chronic bronchitis, and emphysema. Dust and odors also can cause a nuisance for nearby residents, reduce property values, and aggravate the aforementioned lung conditions.
- **CR2.5 Maximize Resilience.**
 - This credit addresses the implementation of strategies and systems to increase the resilience of the project. While it can be assessed independently, it should be considered as a continuation of the previous resilience credits. After identifying vulnerabilities and, it is time to implement the strategies on the project. This credit is independent because successful and effective implementation requires a range of actions beyond the resilience strategies themselves.

We decided to include CR2.5 as a general mention to the need for resilience also at the level of ground improvement.

As a synthesis of this process the structure of the sustainability assessment that we will be using for analyzing our ground treatment cases is the following one.

			Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life 	Wellbeing	QL1.2 Enhance Public Health & Safety	20	-	-	-	-	b, c, d	-
		QL1.3 Improve Construction Safety	14	-	-	-	-	c,d	-
		QL1.4 Minimize Noise & Vibration	12	-	-	-	-	-	-
		QL1.5 Minimize Light Pollution	12	-	-	-	-	-	-
		QL1.6 Minimize Construction Impacts	8	-	-	-	-	-	-
		Leadership 	Collaboration	LD1.4 Pursue Byproduct Synergies	18	-	-	-	a, c, e, f, g, h, j, k
Planning	LD2.1 Establish a Sustainability Management Plan	18	-	-	-	-	-	-	
Economy	LD3.3 Conduct a Life-Cycle Economic Evaluation	14	-	-	-	-	-	-	
Allocation 	Materials	RA1.1 Support Sustainable Procurement Practices	12	-	-	-	d	d	d
		RA1.2 Use Recycled Materials	16	d	-	-	c, e, g	-	-
	Energy	RA1.4 Reduce Construction Waste	16	c	-	-	f, g, h, j, k	-	-
		RA2.2 Reduce Construction Energy Consumption	12	c	-	-	-	-	-
		RA2.3 Use Renewable Energy	24	a	-	-	-	-	-
Water	RA3.3 Reduce Construction Water Consumption	8	-	-	b, c	-	-	-	
Natural World 	Conservation	NW2.2 Manage Stormwater	24	-	a, b	a	-	a	-
		NW2.4 Protect Surface & Groundwater Quality	20	-	-	d	-	a	a
	Ecology	NW3.5 Protect Soil Health	8	f	-	-	-	a	b,d
Climate and Resilience 	Emissions	CR1.1 Reduce Net Embodied Carbon	20	d	-	-	c, d	-	-
		CR1.2 Reduce Greenhouse Gas Emissions	26	e, f	-	-	-	-	-
		CR1.3 Reduce Air Pollutant Emissions	18	-	-	-	-	a, b	-
	Resilience	CR2.5 Maximize Resilience	26	-	-	-	-	-	-
		CR2.6 Improve Infrastructure Integration	18	-	-	-	-	-	-
					-	-	-	-	-

Tab. 5-6 - The framework for Ground Improvement Techniques as a construction process.

At a glance, it can be noted that all the DNSH objectives are touched through this dedicated assessment and that, despite the very specific technology that we are considering, this tool can keep the focus of designers and constructors on the more general goal of systemic sustainability. At the same time, the sustainability analysis conducted with this tool, can be easily integrated in wider analyses (i.e. at the whole project scope level) both with Envision and DNSH criteria.

A potential tool for qualitatively guiding the analysis of a construction process and frame sustainable strategic choices. Just having an overview of the indicators tells a lot: they span from the working site (noise, construction impacts on communities), to decision making tools (byproduct synergies, LCA, LCCA), to resources exploitation (sustainable procurement, recycle, reuse, waste, energy kind and consumption, water consumption), to the surrounding ecosystem (groundwater quality, soil health) to climate change (embodied carbon, GHG emissions, air quality). Comparing this framing with a pure impact analysis, the difference lies in the fact that the focus is put firstly on strategic choices and then on consequences. Moreover, the combination of the Envision protocol and the EU taxonomy creates consistency in the approach: different stakeholders find their point of view clarified and different designers or constructors, no matter where in EU can approach sustainability in a very consistent way.

6 A methodological approach to assess sustainability in geotechnical construction techniques

6.1 General view of the methodology

The following figure represents a graphical synthesis of the proposed methodology.

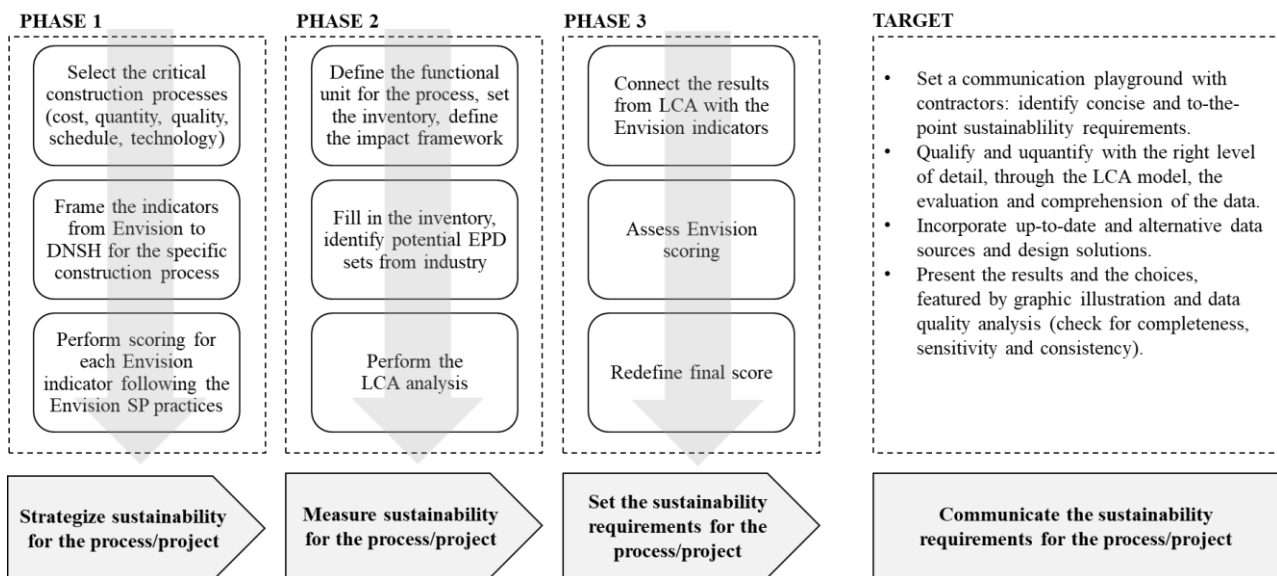


Fig. 6-1, The Three Phased Method.

The first phase of the method: a tool for qualitatively guiding the analysis of a construction process and frame its sustainable strategic choices. Just having an overview of the indicators of the Envision/DNSH framework presented in the previous chapter tells a lot: they span from improving the working site (noise, construction impacts on communities) to decision-making tools (byproduct synergies, LCA, LCCA), to resource exploitation (sustainable procurement, recycle, reuse, waste, energy kind and consumption, water consumption), to the surrounding ecosystem (groundwater quality, soil health), to climate change (embodied carbon, GHG emissions, air quality). When this this framing is compared with a pure impact analysis, the difference lies in the focus being put first on strategic choices and then on consequences. Moreover, combining the Envision protocol and the EU taxonomy creates consistency in the approach: different stakeholders find their point of view clarified, and different designers or constructors, no matter where in the EU, can approach sustainability consistently. The application of the Envision/DNSH framework represents the first phase as a qualitative assessment of our method.

The need for an LCA cradle-to-gate/site analysis: the second phase of the method. The Envision/DNSH assessment tool that we proposed in the previous pages is needed in the first step of our methodology, and, as said, it creates the framework for the specific construction case. When defining the ratings for each indicator, following the Envision protocol rules, the decision maker has to move from the strategy's qualitative world to the tactics' quantitative world. For this to happen, a Life Cycle Assessment is needed, focused on the construction process's cradle-to-gate/site life cycle span.

Depending on the process, it can be relevant to set the boundaries at the 'gate' or at the 'site': even if the materials and product used may have central relevance in terms of impact when it comes to construction processes, the implementation in the site can create alternatives and make the difference. This is the case for ground improvement techniques, and this is the reason why, very often, a simple Environmental Product Declaration

in itself does not make sense in measuring sustainability (while advertising tells our sector the contrary), because it stops at the 'gate' of the site work.

<u>Life cycle stage</u>	<u>Description</u>	<u>Module</u>
Product stage	Raw material extraction and processing	A1
	Transport to the manufacturer	A2
	Manufacturing	A3
Construction process stage	Transport to the construction site	A4
	Construction	A5
Use stage	Use of the product	B1
	Maintenance	B2
	Repair	B3
	Replacement	B4
	Refurbishment	B5
	Operational energy use	B6
	Operational water use	B7
End-of-life stage	Demolition/Deconstruction	C1
	Demolition waste transport	C2
	Waste processing	C3
	Waste disposal	C4
Benefits and loads beyond the system boundary	Reuse, Recovery, Recycling, Potential	D

Tab. 6-1, System boundaries according to EN 15804 and EN 15978, cradle-to-gate and cradle-to-site shaded in grey.

A full life cycle analysis performed for the whole project requires a significant set of modeling and a multidisciplinary set of design choices that make the full LCA a ‘difficult’ tool for holistic decisions for large construction (infrastructure) processes. When an LCA analysis is focused on a cradle-to-gate phase that isolates a specific construction process, it can help to fine-tune technologies, materials, and site work choices that are still relevant to the overall sustainability performance of the whole project and can support the transformation of a specific slot of the supply chain of a large construction project.

This is why a cradle-to-gate/site LCA analysis is the second phase of our methodology and is used to ground the rating for the Envision indicators and help maintain consistency in the sustainability approach to the project. Being connected through the framework to the EU taxonomy gives the quantitative feedback that the EU Regulation seeks.

Revising the Envision/DNSH assessment in the light of the LCA Analysis: the third phase of the method.

Once the LCA analysis is completed a final revision of the assessment is made, and the valuation is finalized. The output of the three-phased method allows communication with the stakeholders at three levels. At the highest level, a single ‘score’ for the project can be the ideal project communication tool for non-specialized stakeholders; at the intermediate level, the indicators score can explain the reasons behind sustainability strategy and tactics in the project; at the extreme detail level, the LCA output can quantitatively (and transparently) support procurement decisions in the construction phase.

In the following paragraphs, we perform the three-phased method for a pilot case study of a ground improvement in an open-air excavation below groundwater, considering five different operational solutions, each based on one of the identified technologies: permeation grouting, jet grouting, artificial ground freezing.

6.2 The case study: the analysis of three soil treatment ground improvement alternative strategies through the lenses of sustainability

For geotechnical engineering to contribute to sustainable development, the core practice must be made environmentally friendly and resource-efficient. However, geotechnics has to be able to tell how much it contributes. With their diversity and innovative variability of needs and technologies, ground improvement techniques are an ideal testing field for a sustainability-based design approach. On the one side, there is the

need to focus on the efficiency of the processes and the technologies; on the other hand, there is a complex variety of materials involved. Geotechnics stakeholders (designers, constructors, customers) are often faced with ground improvement needs that are required to deal with many contextual constraints: logistical, mechanical, schedule, and cost. Furthermore, those are so compelling that there is no time to consider environmental efficiency (read sustainability) as a relevant criterion for a choice.

The approach presented in the thesis, which focuses on cradle-to-gate or cradle-to-site schemes and keeps the level of detail at the construction stage, allows the sustainability assessment to become extremely powerful in strategy selection and technology fine-tuning phases and, above all, easy to perform. This study aims to open the way to use life cycle thinking in geotechnics as an everyday tool that can make ‘the’ difference for decision-makers and designers.

To this aim, we designed an artificial case study where an open-air excavation below the water table level (we assumed a typical alluvial soil condition in the area of Milan) needs to be stabilized, before executing any concrete cast. Three soil improvement technologies are used: permeation grouting, jet grouting, and artificial ground freezing. The single- and the double-fluid jet grouting techniques have been separately explored, as well as two different freezing methods are compared, using brine or, in alternative, nitrogen as coolant. In total five cases were studied. The implementation of the three-phased method is aimed to show different ranks of impact and different fine-tuning and improvement options [Pettinaroli, Susani et al., 2023].

Applying the Envision/DNSH framework to ground improvement construction processes

The Envision/DNSH framework developed in the previous chapter can be simplified to the case of geotechnical construction processes by avoiding those indicators that involve more general aspects of the infrastructure design (plans, strategic documents, etc.) and keeping the focus on the construction process in itself.

The following table represents this reduced framework and will be used in the analyses.

Envision category	Envision credit	Maximum Points Available	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of life: Wellbeing	QL1.4 Minimize Noise & Vibration	12	-	-	-	-	-	-
Quality of life: Wellbeing	QL1.6 Minimize Construction Impacts	8	-	-	-	-	-	-
Leadership: Collaboration	LD1.4 Pursue Byproduct Synergies	18	-	-	-	a, c, e, f, g, h, j, k	a, c, e, f, g, h, j, k	-
Leadership: Economy	LD3.3 Conduct a Life-Cycle Economic Evaluation	14	-	-	-	-	-	-
Resource allocation: Materials	RA1.1 Support Sustainable Procurement Practices	12	-	-	-	d	d	d
Resource allocation: Materials	RA1.2 Use Recycled Materials	16	d	-	-	c, e, g	-	-
Resource allocation: Materials	RA1.4 Reduce Construction Waste	16	c	-	-	f, g, h, j, k	-	-
Resource allocation: Energy	RA2.2 Reduce Construction Energy Consumption	12	c	-	-	-	-	-
Resource allocation: Energy	RA2.3 Use Renewable Energy	24	a	-	-	-	-	-
Resource allocation: water	RA3.3 Reduce Construction Water Consumption	8	-	-	b, c	-	-	-
Natural world: Conservation	NW2.4 Protect Surface & Groundwater Quality	20	-	-	d	-	a	a
Natural world: Ecology	NW3.5 Protect Soil Health	8	f	-	-	-	a	b, d
Climate and resilience: Emissions	CR1.1 Reduce Net Embodied Carbon	20	d	-	-	c, d	-	-
Climate and resilience: Emissions	CR1.2 Reduce Greenhouse Gas Emissions	26	e, f	-	-	-	-	-
Climate and resilience: Emissions	CR1.3 Reduce Air Pollutant Emissions	18	-	-	-	-	a, b	-
	Maximum achievable rating	232						

Tab. 6-2, Reduced frame Envision vs. DNSH for ground improvement techniques.

Essentially, few indicators have been avoided:

- QL1.2 Enhance Public Health & Safety
- QL1.3 Improve Construction Safety

- QL1.5 Minimize Light Pollution
- LD2.1 Establish a Sustainability Management Plan
- NW2.2 Manage Stormwater
- CR2.5 Maximize Resilience

The case study

Geometry and geology

As an ideal design case study for the application of the Three Phased Method for ground improvement treatments, an excavation site located in the municipality of Rozzano (MI) was considered. The choice of the location is based on the knowledge of the site deriving from previous interventions designed by the authors, which provided the geological and hydrogeological information necessary for the classification of the area and the modeling of a plausible scenario.

The excavation site is assumed to have the following characteristics:

- square shape with sides of 10 meters each;
- depth of 5 meters, with the following stratigraphy:
 - 5 m of gravel and sandy layer
 - water table level at -1m
 - from -5m clayey formation;
- negligible groundwater speed.

These assumptions guarantee important advantages;

- the simple excavation geometry makes calculations easier;
- the granulometric composition of the soil to be excavated and the negligible underground water flow do not preclude the use of any of the soil treatment methods examined, described in the next chapter;
- the watertightness nature of the clayey layer at the level of the excavation bottom avoids any piping problem, which could cause flooding of the site.

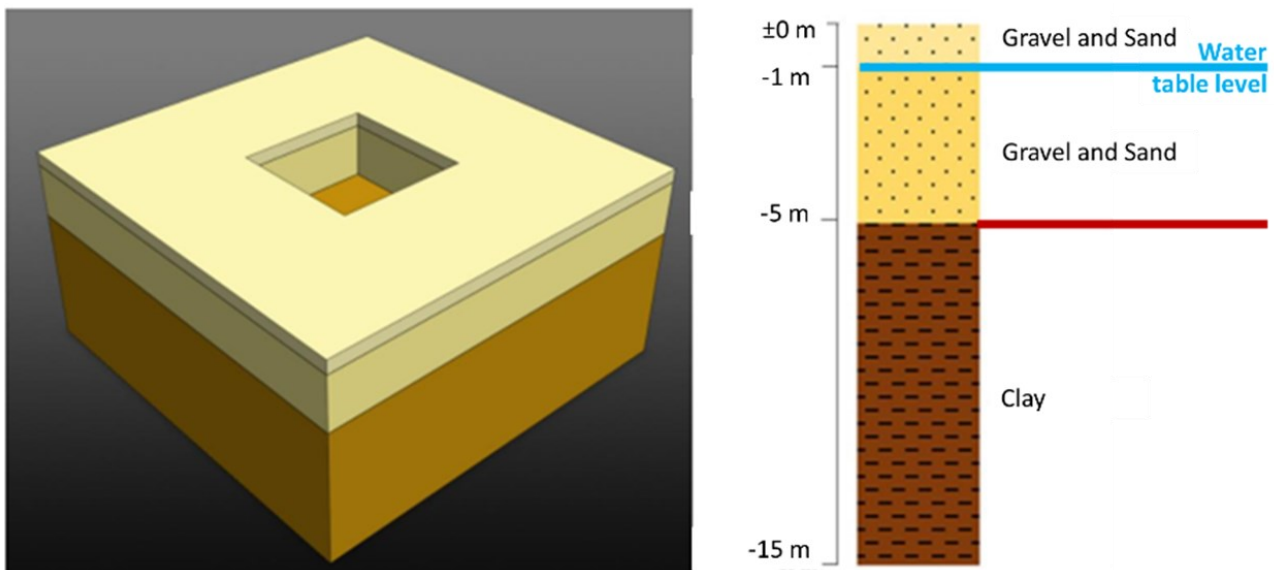


Fig. 6-2, The open-air excavation for the case study [Pettinaroli, Susani et al., 2023].

As said, thanks to the geometry of the excavation case, in order to make our analyses comparable the treatment have been designed in such a way that the different techniques use a similar modular pattern of ‘columns’ and

drilling depths; this allows the sustainability analysis to focus on what is relevant under the environmental impact point of view.

Geotechnical verifications

In the following a preliminary evaluation concerning the stability of the case study is considered. A simplified approach based on limit equilibrium analyses and Rankine theory has been adopted. The safety level LS related to the overturning moment, horizontal sliding and bearing capacity are presented both in short time (ST) than long time (LT) condition assuming for the clay undrained and drained parameters respectively.

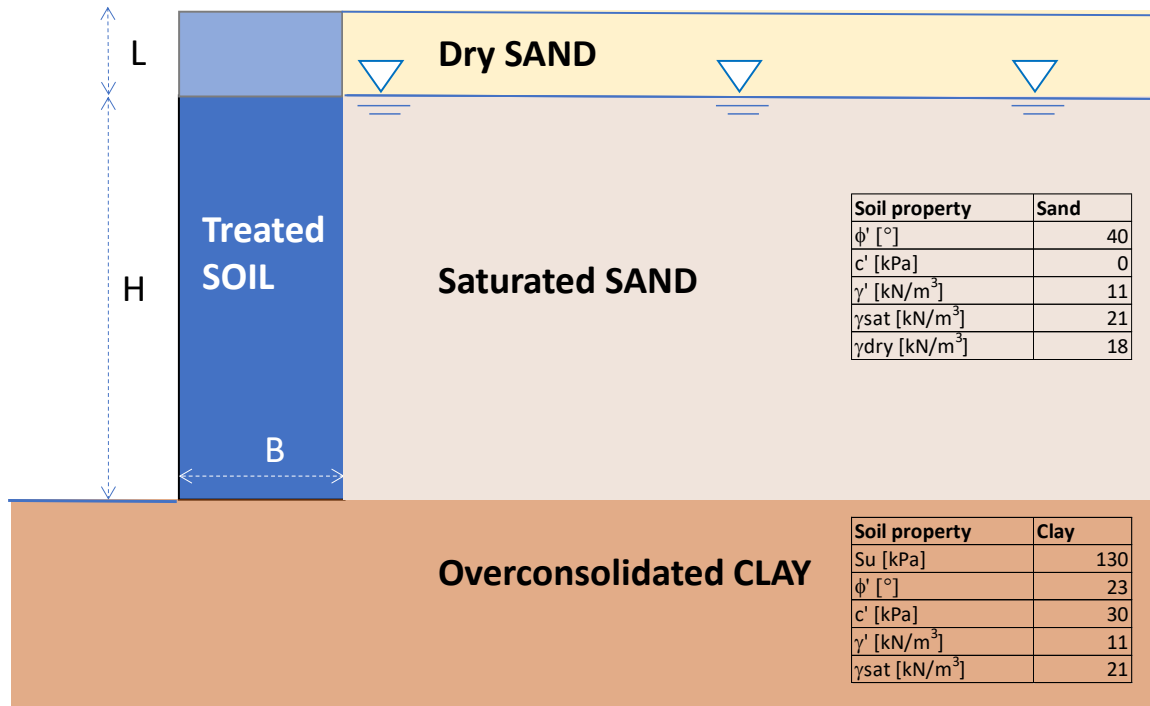


Fig. 6-3, Layout and geotechnical properties of the case study.

As working hypotheses for these verifications, it has been considered that the treated area with the 3 methods (PG: permeation Grouting; JG: Jet Grouting; AGF: artificial ground freezing) could be considered as a rigid gravity wall. In addition, since this retaining structure (i.e. the gravity wall) is considered as temporary solution necessary to realize a permanent structure, the level of safety reported refers to assuming and equal to 1 all the partial coefficient referred e.g. in the Eurocode EN7. This assumption is enough for the focus of this work and should be considered just to support the LCA application to a physically based case study.

Treated soil properties have been assumed on the basis of professional experience data. The latter are derived from laboratory test performed on cored as well as reconstructed samples, for similar works and soil conditions.

In the following figures the level of safety is evaluated with respect to: i) overturning moment, ii) horizontal sliding and iii) bearing capacity. For each case the meaning of the symbols recalled in the tables are referred in the drawing on the left. The limit loads are evaluated first and after the acting loads. Finally, the level of safety is evaluated as the ratio between the limit loads and the acting loads. The Rankine theory have been adopted to estimate the earth pressure on the rigid gravity wall while the Terzaghi formula has been adopted to estimate the limit bearing capacity.

In all the cases the level of safety results greater than 1. Therefore, we can considered that the case study is physically well posed according to the simplified assumptions considered.

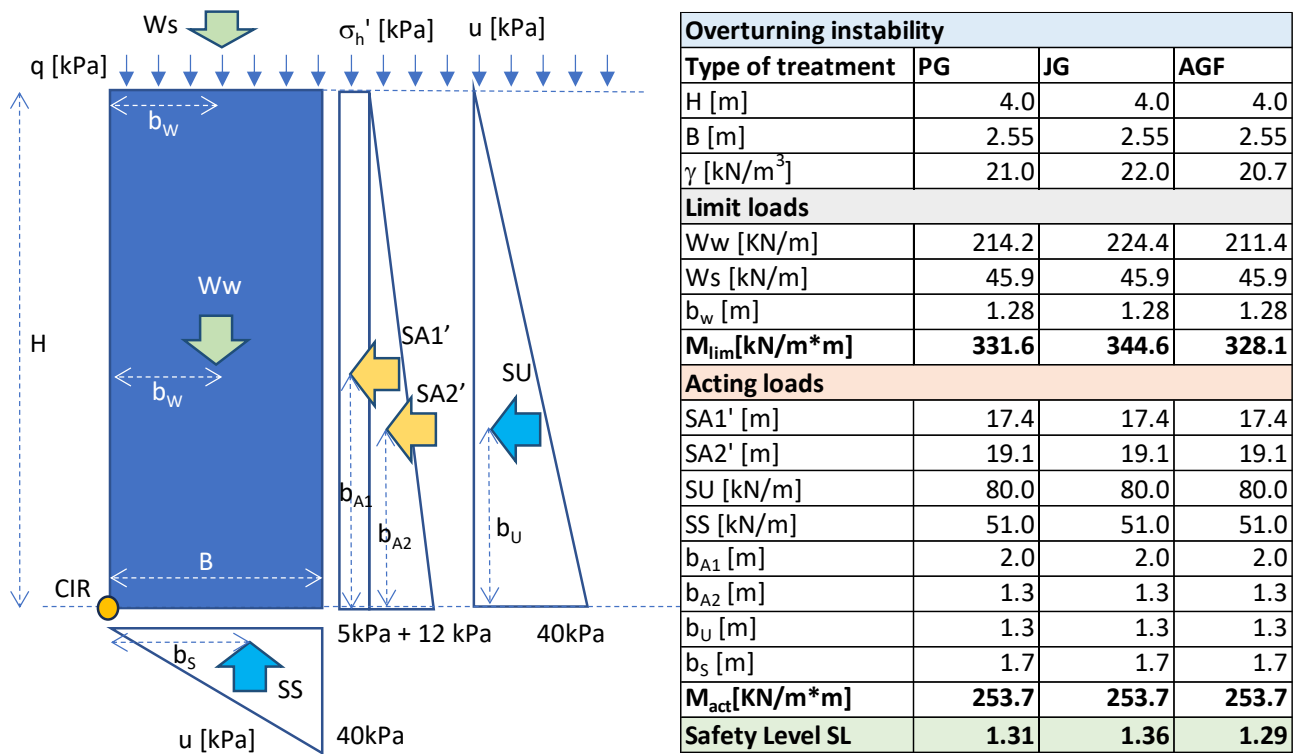


Fig. 6-4, Overturning verification of the adopted case study.

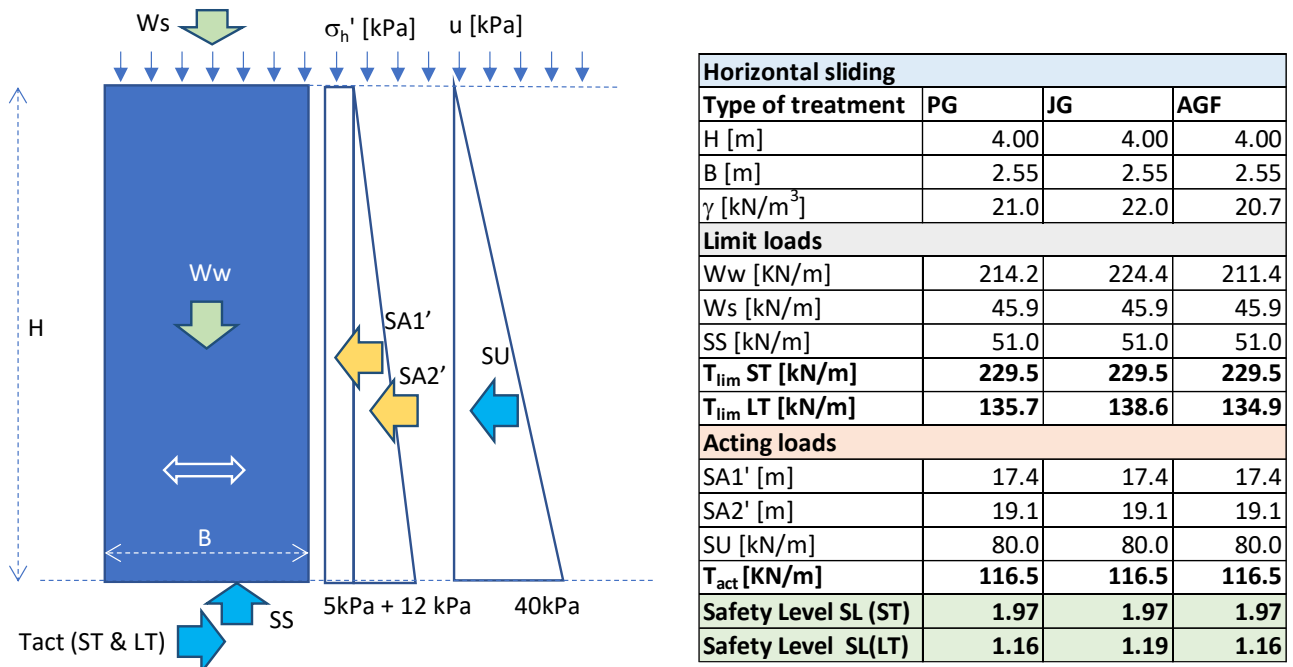


Fig. 6-5, Horizontal sliding verification of the adopted case study (ST Short Term; LT long Term).

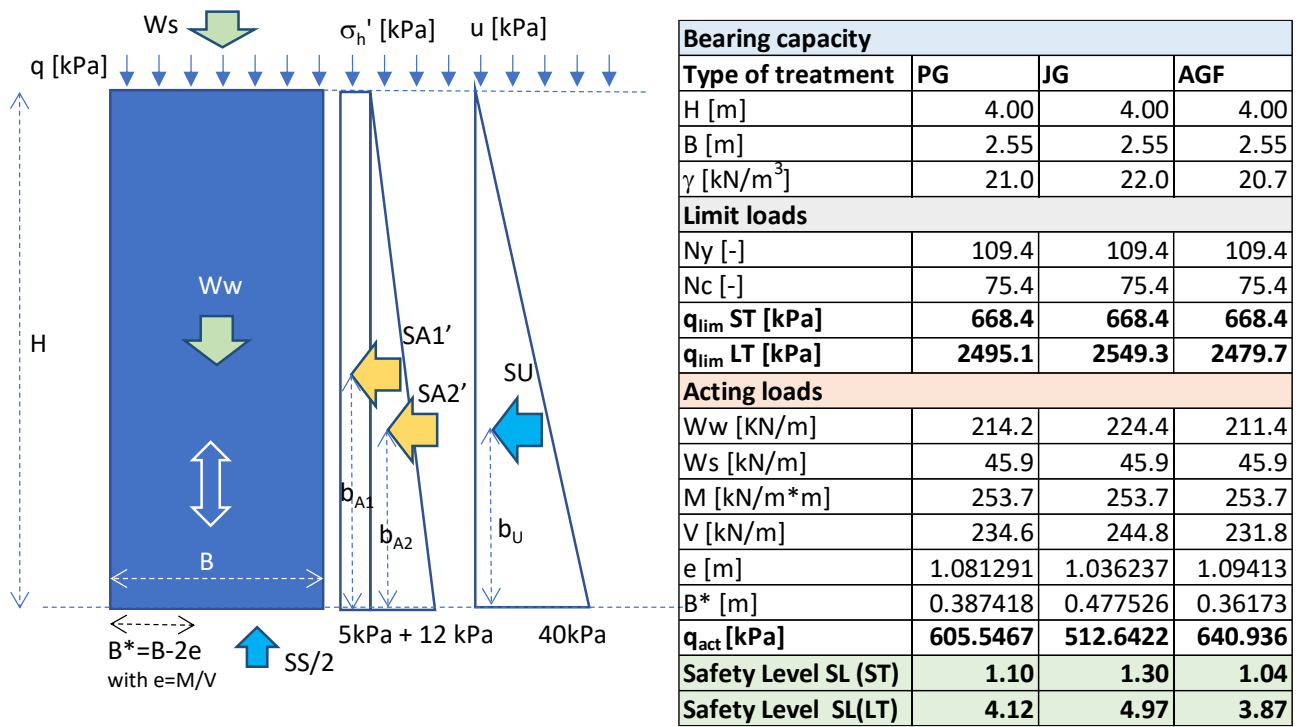


Fig. 6-6, Bearing capacity verification of the adopted case study (ST Short Term; LT long Term).

7 Soil treatment techniques.

7.1 Soil treatment technologies usable for the pilot case

The construction of infrastructures involves basically interferences with the ground. Foundation, excavation, stabilization, landslides and slides stabilization and protection, ground impermeabilization, ground decontamination are examples of issues to be faced during infrastructure execution that can be successfully solved using ground improvement technologies. These interventions may have a temporary role, providing an useful effect just during the construction stage (i.e. to guarantee the ground stability or watertightness during the excavation of a shaft or a tunnel), as well as a long-term function, strictly necessary for the lifetime of the infrastructure (to underpin a structure or to create an impervious curtain under a dam). In the latter cases the effect of the treatment is expected to persist for a long time (at least the infrastructure lifetime), while in the first cases the effect may cease shortly after the construction work is completed. Thus, these kinds of intervention may provide different impacts along the various stages of a LCA, rarely or practically never ending at the stop of the site stage.

In this research, we focused our attention on a group of soil treatment characterized by the use of the small diameter drilling technology to perform the treatment execution. More in detail, we considered the following 3 technologies: permeation grouting (PG), jet grouting (JG) and artificial ground freezing (AGF). These techniques require, as first operational activity made on site in the ground, the execution of drillings with diameter between 90 and 130 mm, that basically may be carried out with the same kind of drilling machine.

Following activities may then widely differ from a technology to the other, in terms of equipment, materials, procedure, management of the treatment work as well of the activities to be carried out later, during the infrastructure construction. Thus, producing also different impacts on the work development and building operativity and maintenance. Moreover, different methods of the same type of technology produce significant, different impacts.

As a fact, in our study, we distinguish:

- two different systems of JG treatment:
 - mono-fluid system (JG-1) using cement-based grout as operational fluid
 - double-fluid system (JG-2), using also compressed air as operational fluid
- two different systems of AGF treatment:
 - closed system (AGF-B) using brine as coolant
 - open system (AGF-LN), using liquid nitrogen as coolant

The following chart shows a conceptual scheme that points out the main common aspects and the principal differences between the technologies and their main variants considered in our study.

Apart from the drilling stage, the chart puts in evidence other similar aspects common to the studied technologies:

- PG and AGF require to install pipes in the ground, embedded with a cement grout
- JG and PG use cement grouts for the process
- From each drilling made in the soil, all the techniques (JG, PG, AGF) produce a columnar element; JG and PG column typical diameters have an operational limit, while conceptually AGF column dimension rises indefinitely as a function of the freezing time.

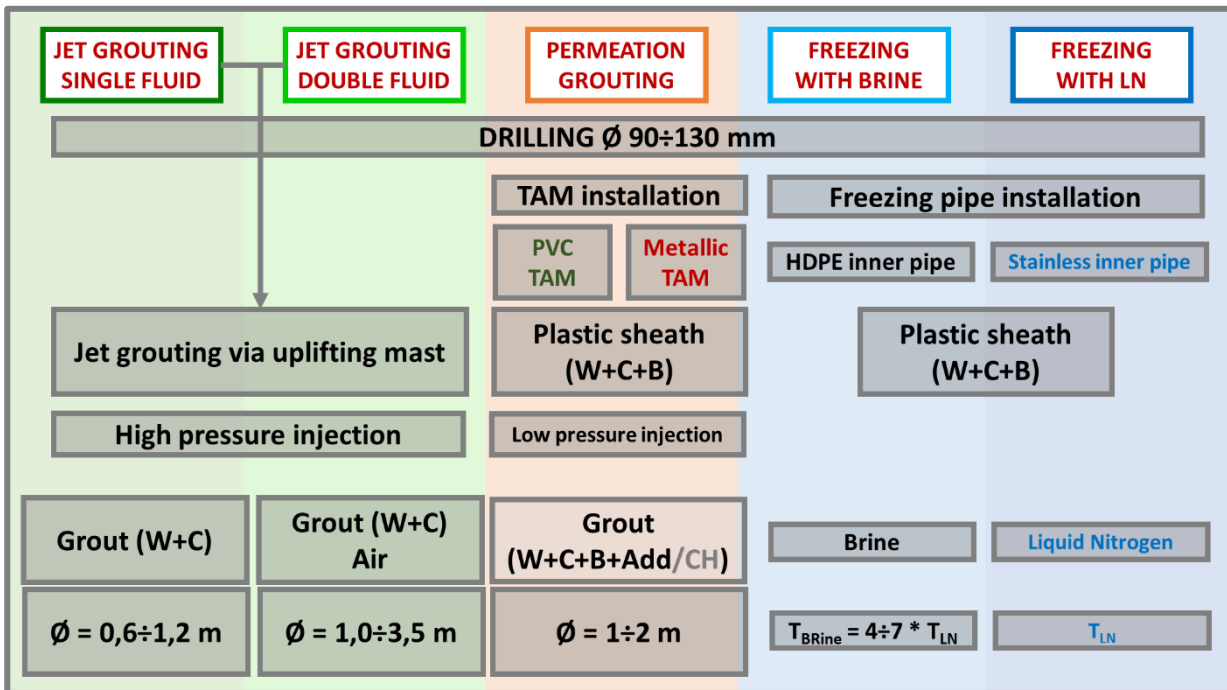


Fig. 7-1, The main characteristics of the ground improvement technologies considered for the pilot case analysis

Here it follows a quick description of the considered technologies, and, at the end of each chapter the process is presented organized in the view of to the LCA steps implemented for a “cradle-to-site” analysis:

- the Life Cycle Inventory (LCI) of inputs and outputs, indicating materials, energy and products necessary for the treatment process execution
- the Life Cycle Impacts Assessment (LCIA), that consists in calculating the environmental impact of the analyzed treatment, presenting the result also distinguishing the main phases of the entire process, in a way that supports comparison or further analysis.

7.2 Permeation grouting (PE)

This type of treatment has the aim to fill the voids of the soil with a fluid injected using a low pressure, in order to allow its spread, into a certain ground volume, producing a negligible displacement between the soil grains. The fluid injected in the voids, according to its rheological behavior, hardens to a solid or to a gel, thus producing an effect on the geotechnical and hydraulic property of the injected soil.

In case of cement-based mixture (solid result), the treatment increases usually the mechanical properties (cohesion, stiffness) as well as the hydraulic properties (reduction of the permeability) of the treated soil.

The effect of the treatment on the soil is mainly defined permanent. This appears to be sure in case of solid hardening mixture injection; the long-term stability of the ground treated only with gel injection has to be verified.

A permeation grouting treatment can be performed with a provisional target or a long-term target.

Focusing on the infrastructures world, the use of the technology allows:

- a) Provisional target
 - to reinforce and/or watertight the ground in order to execute
 - o excavation of large openings, shifts, tunnels, also in proximity of structures
 - o digging in safety conditions under the groundwater level avoiding piping;

b) Long term target

- to improve the foundation ground of structures, such as buildings, walls, bridges, tanks, embankments, both before their execution or for their maintenance, restoring or reparation;
- to modify the flow net of the ground water in critical zones, for instance to create an impervious curtain under a dam or an impervious bulk of an earth dam, to protect and reinforce the riversides and their banks;
- to mitigate instability condition of the landscape, such as slopes stability, liquefaction risk reduction

As a result, the modified properties of the ground treated by permeation grouting allow to execute a wide range of operation involving the ground with several scopes and functionality.

The soil permeation grouting is carried out by mean of sleeved pipes (also well known as “tubes à manchettes” or TAM). Into the ground volume to be treated these pipes are installed into boreholes having low diameter (usually $\text{Ø}90\div120$ mm), executed by a drilling unit, following proper procedures depending on the ground conditions and the geometry of the drilling (direction, length). To ease the execution, it may be necessary to drill with the aid of a low quantity of fluid (water, cement grout or polymeric based fluid). For guaranteeing the borehole side stability, particularly if the soil fine grain percentage is very low, a metallic casing is used during the drilling, being removed after the TAM installation.

The TAM is embedded in the ground surrounded by a plastic cement-based grout, that fixes the pipe in the soil and completely fills the annular space with a continuous, relatively soft material. The pipe is equipped with plastic valves (manchettes), having a defined interaxes along the tube (normally between 0,25 and 0,50 m, usually 0,33 m), in correspondence of 3÷4 $\sim\text{Ø}2$ mm holes made in the pipe wall at the same level.

The injection is carried out by inserting inside the TAM a double-packer (having a length similar to the sleeves interaxis) connected to an injection pump via a proper pipeline. Usually, the packer is firstly placed at the level of the deeper manchette of the TAM; the o-rings placed at the packer extremities are expanded in order to isolate the injection chamber from the rest of the pipe. Then it is possible to start the injection, by pumping the grout via the packer.

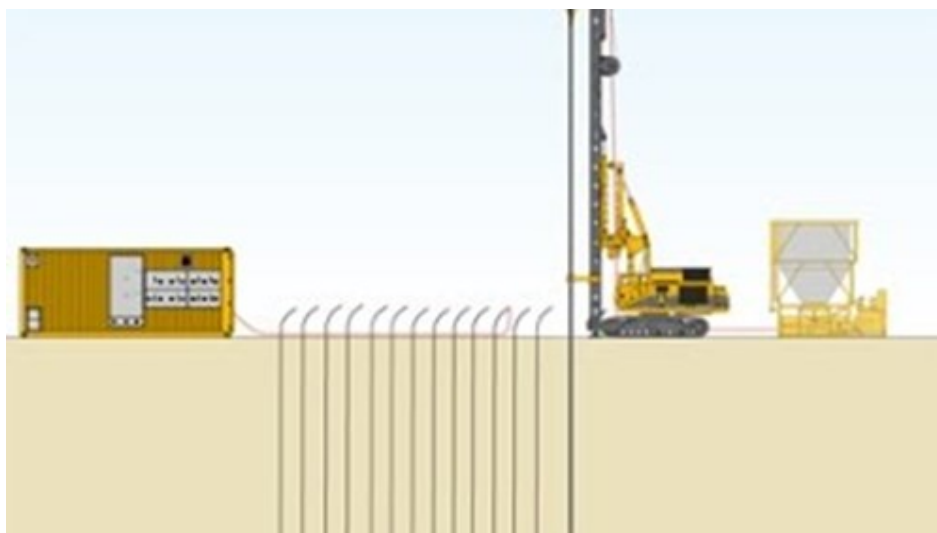


Fig. 7-2, A scheme of a permeation grouting site (Keller).



Fig. 7-3, Permeation grouting practice - Left: TAM in correspondence of a manchette, surrounded by the cement-based sheath, into the treated soil (Rodio) – Right: TAM grouting phase on site (Milan Metro Line 4 site – 2019).

The grout is injected at low pressure controlling the flow rate of the pump. The management of the process is based on the evaluation of these operational parameters as a function of the soil condition (granulometric composition, relative density, voids index) as well as of the working context (presence of structures or sensible obstacles, level of the sleeve, etc.). The injection is carried out for each sleeve of a TAM, in all the TAMs installed in the ground.

Usually, the grout volume to be injected through a sleeve is pre-fixed (“controlled volume” method), as well as the fluid flow rate and the grouting pressure limitations. The exceeding of the latter is normally a sign of the achievement of the saturation degree of the soil for the grout mix injected; in this case the injection is stopped, regardless of the volume target. Here comes the interesting part of the TAM technology: it is possible to proceed with following stages by injecting progressively more permeating grout mixture, using the same procedure with proper referring parameters of limitation pressure and flow rate, as well as of fluid quantity. The operating parameters (flow rate, pressure, injected grout volume) are nowadays controlled with an automatic unit equipped with a software that allow to record the data and for the onsite operators to manage the process, aided by a partial automation.

Several injection stage can be carried out, as previously pointed out. According to the target of the treatment, different kind of grouts as well as number of stages can be designed. The technology allows to evaluate the progress of the treatment, by an expert analysis of the operative parameters. The possibility to implement a multi-stage process, thanks to the repetitive use of the TAMs, allow to tailor the permeation grouting to any zone of the ground, making the technology very versatile.

This technology can be successfully used for treating coarse soils in which silty and clayey fraction is less than 20%. The penetrability of the grout mixture in the ground is definitely limited by both the grout type and the soil porosity. Cement based grouts are composed by a suspension of cement particles in water. A third component, the bentonite, is added to stabilize the mixture. Finally, an additional chemical admixture is also added to reduce the viscosity of the ternary mix. The cement particles dimension and the effective fluidifying action of the admixture affect the final “penetrability capacity” of the grout. Under the rheological point of view, the described cement grout, during the injection, behaves as a Bingham plastic fluid, described by a plastic viscosity and a yield point. The setting time of the grout is of several hours, thus not interfering with the treatment execution duration.

Chemical products (silica-based grouts) are used in further stages to refine the cement grout injection, providing effective results in terms of permeability reduction of the treated soil. These products, to a first approximation, are similar to a perfect fluid, following the newtonian rheological model (like the water). The setting time of these products is rather quick, varying in average from 30 to 120 minutes, due to the chemical reaction of the components (mixed right before the injection) and it is affected by the temperature of the latters and of the atmosphere. This involves a carefully setup of the components dosage in the starting phases of a

treatment work, including further adaption procedures in case of significant environment temperature fluctuations. In the last decades became available on the market dry products to be mixed with water that allow for a simplification of the grout preparation.

More fluid grouts (for example nanosilica) are rarely used, extending granulometric composition range of the treatable soil to silts, in the face of a strong increase of the grout cost.

In this study, the analyzed permeation grouting treatment is assumed to be efficiently carried out using only a cement-based grout, without necessity of integrative stages of silica grout injection, as described in Chapter 9.

Considering the permeation grouting (PG) process under an LCA thinking perspective, it is possible to distinguish the following phases:

Life Cycle Inventory (LCI)

This phase focuses on the inputs and outputs for the PG process.

The inputs are:

- raw materials: water, that will be used for the site operations
- fuel and electricity, necessary for the transports to the site and the process execution
- production of machinery, necessary for the process: drilling unit, grout turbo-mixer, bentonite agitator, grout agitator, injection unit plant;
- material production: PVC Tube A Manchettes; Cement, Bentonite, Additive for the grout mixture

The output is:

- waste: spoil of the drilling

The inventory level can be compiled, on the basis of the Simapro Ecoinvent library, that provides data referred to general market, except for the case in which an EPD, i.e. an environmental product declaration is available.

The impact of the transports to the site is variable according to distance to be cover to reach the site.

Life Cycle Impacts Assessment (LCIA)

This phase consists in calculating the environmental impact of the analyzed permeation grouting treatment, presenting the result also distinguishing the main phases of the entire process as it follows:

- soil drilling, using the drilling unit, and installation of the TAMs by performing the sheath using the mixing and injection plant
- cement grout mix preparation on site, using the mixing plant
- soil permeation grouting using the injection plant
- transport of machinery, products and waste.

7.3 Jet grouting (JG)

This type of treatment is based on the concept of mixing with high pressure the in-situ soil with a cement-based mixture, producing a partial soil substitution in order to create in the ground a sort of poor concrete elements having improved mechanical and hydraulic characteristics with respect to the natural ground conditions. The process produces a spoil material, also composed by soil and cement grout, to be collected and disposed.

The effect of the treatment on the soil is permanent.

A jet grouting treatment can be performed with a provisional target or a long-term target.

Focusing on the infrastructures world, the use of the technology allows:

- a) Provisional target
 - to reinforce and/or watertight the ground in order to execute
 - o excavation of large openings, shifts, tunnels, also in proximity of structures
 - o digging in safety conditions under the groundwater level avoiding piping;
- b) Long term target
 - to improve the foundation ground of structures, such as buildings, walls, bridges, tanks, embankments, both before their execution or for their maintenance, restoring or reparation;
 - to modify the flow net of the ground water in critical zones, for instance to create an impervious curtain under a dam or an impervious bulk of an earth dam, to protect and reinforce the riversides and their banks;
 - to mitigate instability condition of the landscape, such as slopes stability, liquefaction risk reduction

As a result, the modified properties of the ground treated by jet grouting allow to execute a wide range of operation involving the ground with several scopes and functionality.

The technology consists of the injection, at very high pressure (30÷70 MPa) and through special nozzles, of a stabilizing mixture. The nozzles (one or more) are installed in the bit of the special must of the drilling unit. After the drilling in the ground down to the required level, the must, rotating, is lifted up, according to a defined temporization of both the movements. The grout ray, injected by the nozzles, breaks up the soil, and this effect, combined with the rotation of the must, produces the mixing in situ of the cement grout and the soil.

The result is to form a sort of conglomerate soil elements (the so-called jet grouting column) that, once the setting time of the mixture has elapsed, owns improved mechanical and hydraulic characteristics compared to the initial conditions. The partial substitution of the ground in situ with the cement grout involves that a spoil material (also composed by grout and soil) shall be released in surface rising up through the drilling hole, during the injection process. Due to the mass balance principle, in case of absence of spoil, an uplift of the surface would occur; this phenomenon has to be carefully avoided, easing, during the jet grouting execution, a correct spoil releasing.

The amount of spoil varies from 80-100% of the treated ground (in cohesive soils) to 30- 50% in case of coarse soils, where drainage effects take place.

This technology allows to obtain a high level of mechanical soil improvement and a defined geometrical shape, which dimension depends both on the energy applied for the treatment and on the soil properties. The improvement of the mechanical properties of the jet grouted soil is definitely higher than the result achievable by performing the conventional injections. To this scope, a grout, composed by water and cement with a W/C \approx 1 ratio is currently used.

This technology can be successfully used for treating a rather wide range of soil composition, also well graded. It tends to lose its efficiency in case of very permeable gravelly layers, where the grout tends to “run” far from the injection point. On the other hand, the more cohesive is the soil, the less is the breaking up effect of the jet treatment.

Being the technology effect strictly related to the energy provided during the injection, several methods have been developed in order to increase the column dimension and even to obtain different geometry of the jet grouted soil elements.

For the latter aspect, different management of the mast rotation allows for obtaining, for instance, elliptical columns (applying a variable rotational speed to the mast), or so-called mono-directional treatment, in which no rotation is applied to the mast, and the bit is equipped with 2 nozzles counterposed with an angle lower than 180° in order to obtain a “V-shaped” oriented element. These applications will not be examined in this study, even though they can be assessed similarly to the columnar element execution process.

Following the energetic conception of the jet grouting treatment, the column diameter increases with the energy provided by the treatment but it decreases with the increment of the compaction degree and the relative density of the soil. While it seems to be still difficult, at the state of the art, to correlate an univocal, measurable soil parameter to the obtainable jet grouting column diameter, the latter varies rather regularly with the treatment energy, that is directly proportional to the injection flow rate of the grout and, more smoothly, to the injection pressure.

To increase the diameter of the jet columns, it's been set up a differing technology that uses the compressed air as secondary fluid, that provides an additional energy contribute the process and improves the efficiency of the treatment. It exists also a version that uses water as third operational fluid, less diffused than the previous two.

For this study, the single fluid and double fluid system has been considered.

Single fluid system (JG-SF)

The jet technology made with the sole cement grout allows to obtain columns having diameter variable between 0,60 m and 1,20 m. In case of clayey soils, the diameter can even be 0,50 m, but in this soil types it is suggested to use the double fluid technology. The grout quantity injected in the ground is a combination of the grout flow rate pumped by the high-pressure pump and the uplift velocity of the mast with the nozzles, that is carried out by steps usually of 4 cm. An entire rotation of the mast has to be carried out in the time between two consecutive upshift steps. Mechanical properties are widely variable in function of the soil composition: for sandy layers UCT provides strengths that usually start from UCS=5 MPa up to values that increase with the complementary soil composition (from silt to gravel), between 15 to 30 MPa; for silts the range varies from 2 MPa up to around 8-10 MPa, while for clays (with $c_u < 50 \text{ kPa}$) the values start from 1 MPa. The elastic modulus E is on average related to the UCS by the relation $E \sim 500 \cdot \text{UCS}$. Permeability coefficient tends to achieve values between $0,5 \cdot 10^{-7} \text{ m/s}$, tested with Lefranc test; in any case the general homogeneity of the treatment governs the hydraulic behaviour.

Considering the jet grouting single fluid (JG-SF) process under an LCA thinking perspective, it is possible to distinguish the following phases:

Life Cycle Inventory (LCI)

This phase focuses on the inputs and outputs for the JG-SF process.

The inputs are:

- raw materials: water, that will be used for the site operations
- fuel and electricity, necessary for the transports to the site and the process execution
- production of machinery, necessary for the process: drilling unit, grout turbo-mixer, high pressure pumping unit plant;
- material production: Cement

The output is:

- waste: spoil

The inventory level can be compiled, on the basis of the Simapro Ecoinvent library, that provides data referred to general market, except for the case in which an EPD, i.e. an environmental product declaration is available. The impact of the transports to the site is variable according to distance to be cover to reach the site.

Life Cycle Impacts Assessment (LCIA)

This phase consists in calculating the environmental impact of the analyzed permeation grouting treatment, presenting the result also distinguishing the main phases of the entire process as it follows:

- soil drilling, using the drilling unit,

- cement grout mix preparation on site, using the mixing plant
- jet grouting using the high-pressure pumping plant
- transport of machinery, products and waste.
-

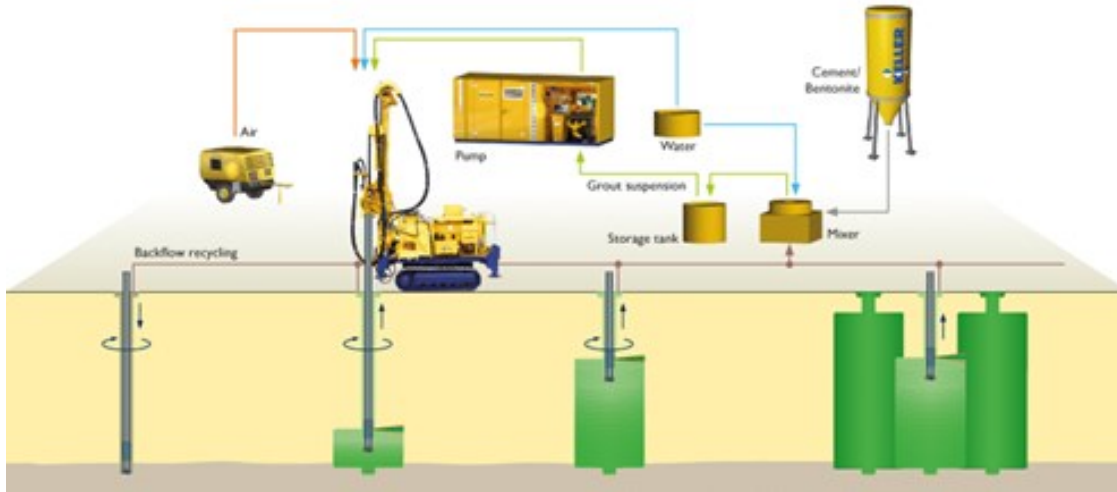


Fig. 7-4, A sitework equipment scheme for single and double fluid Jet Grouting technique (Keller). The air compressor is used only in the double fluid system

Double fluid system (JG-DF)

The jet technology uses the air as secondary fluid to increase the energy of soil breaking up. The air is provided by an air compressor, with a pressure around 0,8~1,2 MP, a flow rate of 8-10 mc/min. The air flows along the drilling must into a duct coaxial to the grout one, and is injected in the ground through a dedicated annular section that surrounds the circular grout nozzle. The process is then similar to the JG-SF system, except for the fact that the uplift speed and the grout flow rate are higher than I the previous case. As a result, the diameter achievable with the double fluid technology may vary from 1 m (in clayey soils) up to 3,5 m in medium density sandy-gravelly soils. Mechanic and hydraulic parameters are similar the values obtainable with the single fluid technique; sometimes the strength results slightly lower because of the air inclusion in the treated soil, while hydraulically this reduction is almost never observed, being the air bubbles isolated each to other. The double fluid system is very frequently used for the execution of bottom plugs for excavation under the water ground level, while it is normally avoided for fore-poling canopy treatment in tunneling, where single fluid is preferred. In other conditions the choice of the system depends on the local conditions or constraints, on the design concept as well as on the site organization.

Life Cycle Inventory (LCI)

This phase focuses on the inputs and outputs for the JG-SF process.

The inputs are:

- raw materials: water, that will be used for the site operations
- fuel and electricity, necessary for the transports to the site and the process execution
- production of machinery, necessary for the process: drilling unit, grout turbo-mixer, high pressure pumping unit plant with air compressor;
- material production: Cement

The output is:

- waste: spoil

The inventory level can be compiled, on the basis of the Simapro Ecoinvent library, that provides data referred to general market, except for the case in which an EPD, i.e. an environmental product declaration is available.

The impact of the transports to the site is variable according to distance to be cover to reach the site.

Life Cycle Impacts Assessment (LCIA)

This phase consists in calculating the environmental impact of the analyzed permeation grouting treatment, presenting the result also distinguishing the main phases of the entire process as it follows:

- soil drilling, using the drilling unit,
- cement grout mix preparation on site, using the mixing plant
- jet grouting using the high-pressure pumping plant with air compressor
- transport of machinery, products and waste.



Fig. 7-5, A vertical jet grouted wall (on the right) made with the double fluid system, performed from the crown of a river diversion embankment to protect a hydro power plant construction

7.4 Artificial ground freezing (AGF)

This type of treatment produces the freezing of the water included in the pores of the soil, producing a treated volume composed by cooled natural soil and ice. The frozen body is hydraulically perfectly watertight and has improved mechanical property than the natural soil in situ, due to the mechanical properties of the ice and to bonding effect that the latter creates between soil grains.

The artificial ground freezing (AGF) is normally performed with provisional purposes, but there are cases in mining industry in which it is adopted as a long-term solution for digging in safety condition under high water table head.

Focusing on the infrastructures world this technology where is used strictly with provisional function to impermeabilizing soils and rocks; in some cases, this effect is coupled with the improvement of the mechanical properties of the ground:

- excavation of tunnels and shaft, also in proximity of structures or infrastructures for:
 - o excavation of special stretches where it is not convenient or even not possible use automatic boring machines: cross-passages of between tunnels, niches,
 - o break-in and break-out zones TBM tunnels or RBM shafts
 - o underpassing special rivers, basins, water supply pipes with high risk of water high heads presence
- temporary foundations reinforcement in high water table level context

- excavation sides stability
- ground foundation improvement
- structures underpinning;
- various special remedial intervention in difficult conditions with groundwater presence

The Artificial Ground Freezing technique requires the installation, in the ground to be frozen, of special metallic freezing probes in which a fluid coolant circulates. The probes release by convection the cryogenic energy to the surrounding soil, that gradually get cold until the pore water freezes at 0°C. The freezing process continues, creating a column of frozen soil around the probe. The process theoretically may endlessly progress. In practice to form a frozen soil body, several probes are disposed according to a design geometry. Thus, at a certain moment the frozen soil columns merge each other, and after a transient the frozen body tends to expand orthogonally to the probe's alignment. This first stage, called freezing stage, allows for the creation of the frozen body. Then the latter must be efficient for the entire duration of the work for which the treatment is necessary: for example, a tunnel excavation. So, it starts the second phase, called maintenance stage, during which the freezing process continues by maintaining the hydraulic and, if necessary, the mechanical functionality of the frozen soil. When the necessity of the functionality ceases, the process is stopped and the soil heats up to the natural conditions.

The ground freezing thus is a thermal process. The treatment is based on providing energy for the extraction of calories from the ground.

On one side there is the coolant, at a temperature strongly below 0°C, that circulates in the probes fed by a freezing plant to which are connected via a circuit.

On the other side there is the ground, composed by soil and water (that must be present at least with saturation degree of 70%) at measurable temperature.

The hydraulic target of an AGF treatment is achieved when a designed volume of soil is frozen, i.e. when the water temperature is below 0°C in the whole volume, haven changing phase to ice.

The mechanical target of the an AGF treatment is achieved when it is achieved a satisfying combination between the thickness of the frozen soil wall and the its temperature in order to obtain the required mechanical strength. In the practice the temperature at the sides of the efficient frozen wall is assumed generally equal to -10°C, Soil specimens are frozen in laboratory and undergone to mechanical tests to determine the mechanical behavior of the material. The frozen soil thickness is provided by a statical calculation.

Finally, a thermal analysis has to be carried out in order to evaluate the energy consumption for both the freezing stage and the maintenance stage, eventually including analysis for additional stages that may have to considered for the main work proper execution.

The frozen soil body is created by a set of freezing pipes placed in the ground. The geometrical disposition is function of the treatment purpose. The impervious frozen ground body is delimited by other impervious layers or walls, allowing to create a volume no more affected, during the maintenance stage, by water inlets.

Each freezing lance is inserted in a borehole drilled in the same way as for a TAMs installation for the permeation grouting, including its embedment using a ternary cement-based grout for sealing the annular space between the hole and the probe, reducing thus the voids and water presence in the mass to freeze.

The probe is composed by two coaxial pipes: the external is plugged at the end in the ground, and equipped with a special head for the connections to a feeding circuit; the special head is connected to the inner pipe where, allowing the circuit to feed it the coolant; the latter flows to the other open end of the inner pipe and then returns along the annular space up to the head, where another connection allows for the outlet of the fluid to a release circuit.

The fluid streaming carries out the freezing process exchanging calories with the ground.

The AGF process is controlled by monitoring the evolution of the temperature in the ground in real time. For this purpose, additional pipes are installed beside the soil volume to be frozen, equipped with thermometric sensors connected by wire to an automatic unit, that records practically in real time the data and sends them to a dedicated platform. The latter is usually accessible via internet by the process managers, that can control and evaluate the thermal condition ongoing in the soil, and subsequently operate on the freezing plant in order to drive correctly the treatment as well to optimize the energy consumption.

Many aspects influence an AGF work. From the freezing system side, nowadays the practice offers two different technologies: the closed-circuit system, that uses a brine as cooling fluid, with a minimum temperature of -35°C , and the open circuit system, based on the circulation of the Liquid Nitrogen at -196°C that evaporates during the process being released in the atmosphere. In this study, both the systems are considered and assessed. Their description is included in two following paragraphs. From the ground side, water has a primary importance. Its thermal properties are well known. Nevertheless, there are conditions that affect the standard behavior of the water:

- the salinity degree lowers the temperature of the freezing point, increasing the process energy consumption
- the presence in the soil pores of other types of fluid, even just diluted in water, also lowers the target temperature
- a groundwater movement disturbs the freezing process, reducing its efficiency and finally increasing the energy consumption and the freezing times. With velocity higher than $16\div 20$ m/day the AGF treatment practically doesn't take place.

Dry soil thermal properties (heat conductivity and heat capacity) depend on the grain mineralogical nature. Finally ground thermal properties are function also of the grain composition and distribution, the water content and the saturation degree. Laboratory tests may provide these parameters.

For the improvement of the thermal ground properties, it is often performed a permeation grouting preliminary treatment with a water/cement grout; this allows for a reduction of the permeability of the soil (particularly useful in case of groundwater movement), and for a reduction of the water quantity to freeze by substituting it with a material having a more favorable thermal behavior, such as a set cement-based grout is.

Closed system AGF (with brine) - (AGF-BR)

This system uses, as coolant, a calcium chloride liquid brine having a freezing point at around -50°C . From the freezing plant the brine, having a temperature of -35°C , is pumped in the distribution circuit pipeline insulated with a proper material (armaflex), and it is delivered, via the special head described above, to each probe.

The inner pipes of the probes are made in HDPE, with a diameter that guarantees the same areal section as the annular space, in order to preserve a regular flow of the liquid brine in the probe. The brine gets back from the probe with a higher temperature: $-27^{\circ}\div -29^{\circ}\text{C}$ during the energy-intensive freezing stage; around $-31^{\circ}\div -33^{\circ}\text{C}$ during the maintenance stage. The brine flows back to the freezing plant where it is chilled down to -35°C by an ammonia circuit, that operates with the aid of a cooling tower.

The freezing plant operates continuously during all the AGF process, fed by electric energy: high absorption during the freezing stage, reduced absorption during the maintenance stage.

The initial freezing stage requires several weeks (usually from 5 to 7, but even more, depending from the geometry as well as on the ground nature) for the creation of freezing body.

Hot spots of the system:

- when it operates, the system is rather simple to be managed: for each stage the operational parameters (substantially the brine flow rate and temperature) are fixed, and possible variation, according to the temperature measured in the soil and provided by the monitoring system, can be applied;
- the brine freezing plant can be installed without significant risks in confined environment, for example into a tunnel or a deep shaft;

Down spots of the system:

- the freezing times are from 4 to 7 times longer in comparison with the open circuit method with liquid nitrogen (described below);
- the slower freezing stage allows for a regular and full expansion of the ice in the soil, easing so possible heaves in surface, that may affect structures or infrastructures close to the frozen soil volume;
- in case of probes rupture that involves the brine loss in the ground, the process is locally definitely slowed down by the decrease of the freezing temperature of the zone where the brine leakage occurred; for this reason, the freezing pipes are often inserted into a sacrificial one-way steel pipe, that however requires larger drilling diameter;
- in case of difficulty in the formation of the frozen body or in the maintenance of it, the slowness of the AGF-BR process makes it hard to take proper countermeasures; for this reason, in some cases an arrangement for a quick, local intervention with the AGF-LN system (described below) is foreseen.

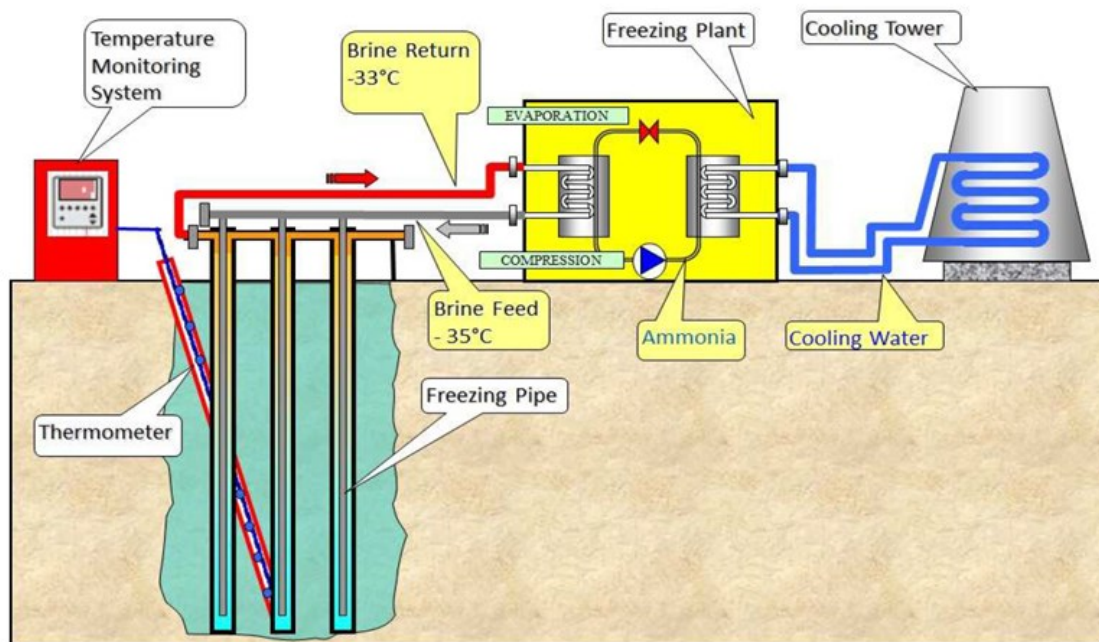


Fig. 7-6, Artificial ground freezing with brine technique: Indirect system circuit scheme (with brine). (Mira Cattò et al. 2016)



Fig. 7-7, Artificial ground freezing with closed system technique (AGF-BR): maintenance stage with brine during the excavation of a railway tunnel for the underpassing of the Isarco River (Brenner Basis Tunnel site – 2021)

Opens system AGF (with liquid nitrogen) (AGF-LN)

The system uses as coolant the Liquid Nitrogen, stored into tanks at a pressure of 2÷3 bar at -196°C of temperature. The LN is introduced into the distribution circuit (made by insulated, stainless pipes) and then delivered to each probe, via the insulated, stainless, special head. The LN flows through the inner metallic pipe, that has a small diameter (20-22 mm). During the streaming the LN rapidly exceeds the evaporation temperature, and changes of state; in this stage the energy consumption is very high, and being to a very low temperature, this produces a cryogenic thermal shock that freezes quickly the ground surrounding the probe. The gaseous nitrogen flows then along the annular section back to the probe head, and from there to the discharge circuit, which final stretch is a chimney that release the gas to the free air.

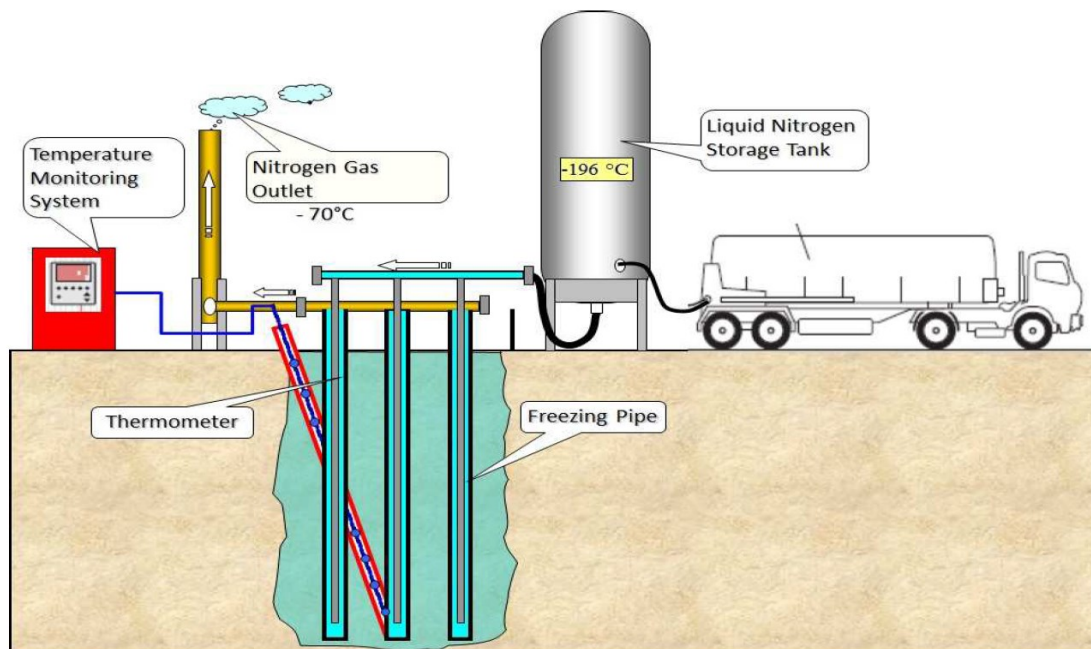


Fig. 7-8, Artificial ground freezing with nitrogen technique: direct system circuit scheme. (Mira Cattò et al. 2016)

The change of state of the nitrogen takes place initially in first part of the probe, near the head, and then “moves” gradually to the end of the inner pipe.

The open circuit process requires a constant refill, by tank trucks, of the storage tanks that normally have to be installed at the site. In case of small freezing circuit, it is possible to connect the latter directly to the tank truck, without installing insulated silos.

The initial freezing stage, using the LN, is quick, requiring usually 7÷10 days, depending on the ground volume to be frozen. The temperature monitoring is in this case even more crucial, than with the AGF-BR method, because the freezing process is definitely more rapid, and the LN cost may rise dramatically in case of bad management of the process. The maintenance stage is carried out intermittently, by feeding the circuit with LN for 10-15 hours, with a quick drop of the temperature in the soil, followed by a stopping period of 2÷3 days during which no LN feeding is ongoing, while the main works can take place. During the stopping period the cryogenic energy migrates from the zone closer to the probes to the peripheral, guaranteeing the maintenance of the necessary thickness of the frozen soil body.

Hot spots of the system:

- the freezing process is very rapid;
- the thermal cryogenic shock causes a reduced expansion of the ice in the ground, reducing the heaves entities in surface and of the nearby structures;
- the quick process allows for immediate countermeasure in case of local difficulties in freezing or keeping frozen the soil;
- possible loss of nitrogen from the probes in the soil doesn't affect the freezing process.

Down spots of the system:

- being the LN colourless, odorless, tasteless, and heavier than the air, in case of leakages from the plant in confined areas (tunnel, shaft), there is a high safety risk people life; thus, during the LN circulation, the people access to the areas anyhow involved in the process must be off-limits and dedicated safety procedures must be set up for managing the start and the end of this stage;
- LN delivery on site involves a well-studied and -managed logistic organization, particularly in area with densely traffic.

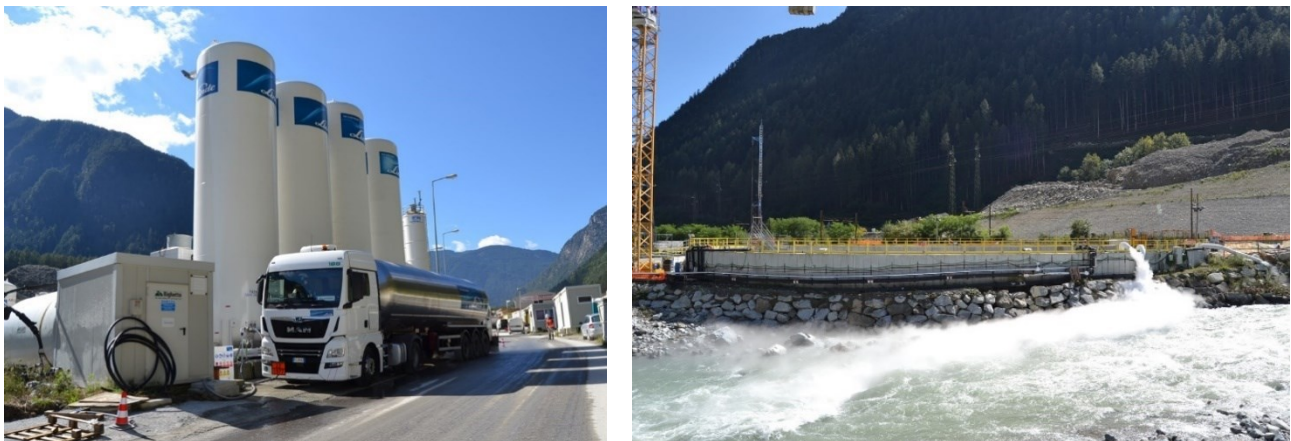


Fig. 7-9, Artificial ground freezing with open system technique: freezing stage for the excavation of a railway tunnel for the underpassing of the Isarco River. On the left: LN delivery to the site – On the right gaseous nitrogen released by the chimney at the end of the cycle (Brenner Basis Tunnel site – 2021)

8 The first phase of the method: Assessing sustainability qualitatively

8.1 Qualitative application of the framework and sustainability rating of the techniques.

As a first step, we apply the framework combining Envision and DNSH to this ideal case, as developed in the previous chapter.

Being our case a design experiment, those indicators that depend on the community and landscape context of a ‘true’ case will be set to the minimum score allowed by Envision; those that can be deepened through the LCA cradle-to-site analysis of the process will be appointed depending on the nature/limitations of the technologies and depending on the expected results from the LCA analysis and the related sensitivity runs. After the numerical analysis, the values assigned to the Envision indicators will be refined in phase three.

The following table gives a detailed overview of the selected credits for the Envision framework adapted to ground improvement techniques.

INDICATOR (CREDIT)	SECTION	METRIC	MAX SCORE
QL1.4 Minimize Noise and Vibration	QUALITY OF LIFE: WELLBEING	The extent that operational noise and vibration is assessed and mitigated, and target levels achieved.	12
QL1.6 Minimize Construction Impacts	QUALITY OF LIFE: WELLBEING	Extent of issues addressed through construction management plans.	8
LD1.4 Pursue Byproduct Synergies	LEADERSHIP: COLLABORATION	The extent to which the project team works with external groups to find beneficial use of waste, excess resources, or capacity.	18
LD3.3 Conduct a Life-Cycle Economic Evaluation	LEADERSHIP: ECONOMY	The comprehensiveness of the economic analyses used to determine the net impacts of the project, and their use in assessing alternatives to inform decision making.	14
RA1.1 Support Sustainable Procurement Practices	RESOURCE ALLOCATION: MATERIALS	The extent of sustainable procurement programs, and the percentage of materials sourced from manufacturers and/or suppliers that implement sustainable practices.	12
RA1.2 Use Recycled Materials	RESOURCE ALLOCATION: MATERIALS	Percentage of project materials that are reused or recycled. Plants, soil, rock, and water are not included in this credit.	16
RA1.4 Reduce Construction Waste	RESOURCE ALLOCATION: MATERIALS	Percentage of total waste diverted from disposal.	16
RA2.2 Reduce Construction Energy Consumption	RESOURCE ALLOCATION: ENERGY	The number of strategies implemented on the project during construction that reduce energy consumption and emissions.	12
RA2.3 Use Renewable Energy	RESOURCE ALLOCATION: ENERGY	Extent to which renewable energy sources are incorporated.	24
RA3.3 Reduce Construction Water Consumption	RESOURCE ALLOCATION: WATER	The number of strategies implemented during construction that reduce potable water consumption.	8
NW2.4 Protect Surface and Groundwater Quality	NATURAL WORLD: CONSERVATION	Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	20
NW3.5 Protect Soil Health	NATURAL WORLD: ECOLOGY	Degree to which the disruption of soil health has been minimized and restored.	8
CR1.1 Reduce Net Embodied Carbon	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in net embodied carbon of materials.	20
CR1.2 Reduce Greenhouse Gas Emissions	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in operational greenhouse gas emissions.	26
CR1.3 Reduce Air Pollutant Emissions	CLIMATE AND RESILIENCE: EMISSIONS	Reduction of air pollutants compared to baseline.	18
MAXIMUM AVAILABLE SCORE			232

Tab. 8-1, The Envision/DNSH framework evaluation for the case study, maximum available scores

The qualitative scoring (first phase of the three-phased method) is assigned based on the characteristics of the project, the five threshold requirements stated in the Envision protocol, and a preliminary hypothesis about the potential impact performance of the examined soil treatment. In Appendix 1 for each of the five techniques is

presented the ‘qualitatively’ assessment made with this tool, following the procedure dedicated to the Envision SP certified by the Institute for Sustainable Infrastructure³. For each of the latter, a table and a radar diagram are shown, summarizing the ratings.

In the table, for each indicator, the column ‘Criteria’ explains the target set for the technique based on ‘state of the art’ knowledge and the case study design characteristics. Each indicator is analyzed in detail in the third phase, and the criteria of choice are assessed and evaluated based on the modeling outcome.

What is essential to notice, going through the criteria set by the protocol, is the fact that the achievement is related to several specific and concrete strategies/implementations that need to be taken into consideration during the development of the design (and as commitments for the following construction phase). Thanks to the fact that the protocol has a holistic view of the project, applying this approach to a construction process enhances the sustainability potential of the specific technique.

The Envision award criteria allocates a minimum achievable score of 20% and categorize scores between 20-29% as verified, 30-39% as Silver, 40-49% as Gold, and 50% and above as Platinum,

- ***Qualitative assessment for the permeation grouting technique***

The radar diagram shows how the best ratings tend to be focused on resource allocation, climate, and resilience

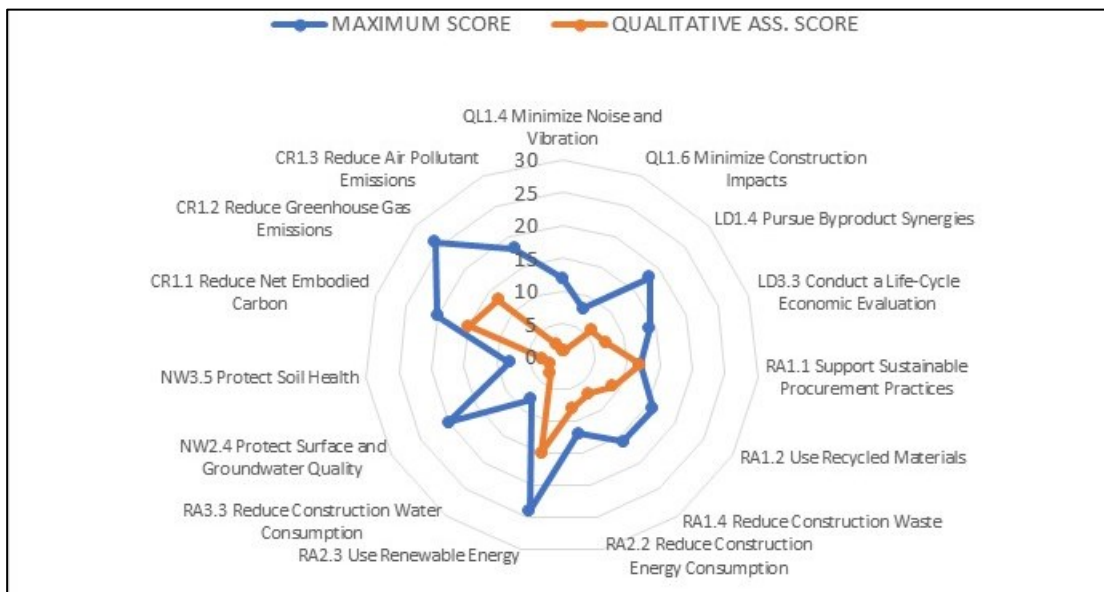


Fig. 8-1, Permeation grouting technique. Diagram of score contribution vs. each Envision indicator (Maximum achievable and qualitative score).

Compared to a maximum reachable of 232 points, this ground improvement process scored 107 points (which means an overall value of 47%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a ‘gold’ rating following Envision rating scale).

³ One of the authors of this research (Stefano Susani) is a certified Envision SP professional. For more details about this credentialing process, please see: <https://sustainableinfrastructure.org/credentialing/envision-sustainability-professional-env-sp/>

- **Qualitative assessment for the single fluid jet grouting technique**

The radar diagram illustrates that the highest ratings are predominantly centered around resource allocation, climate and resilience.

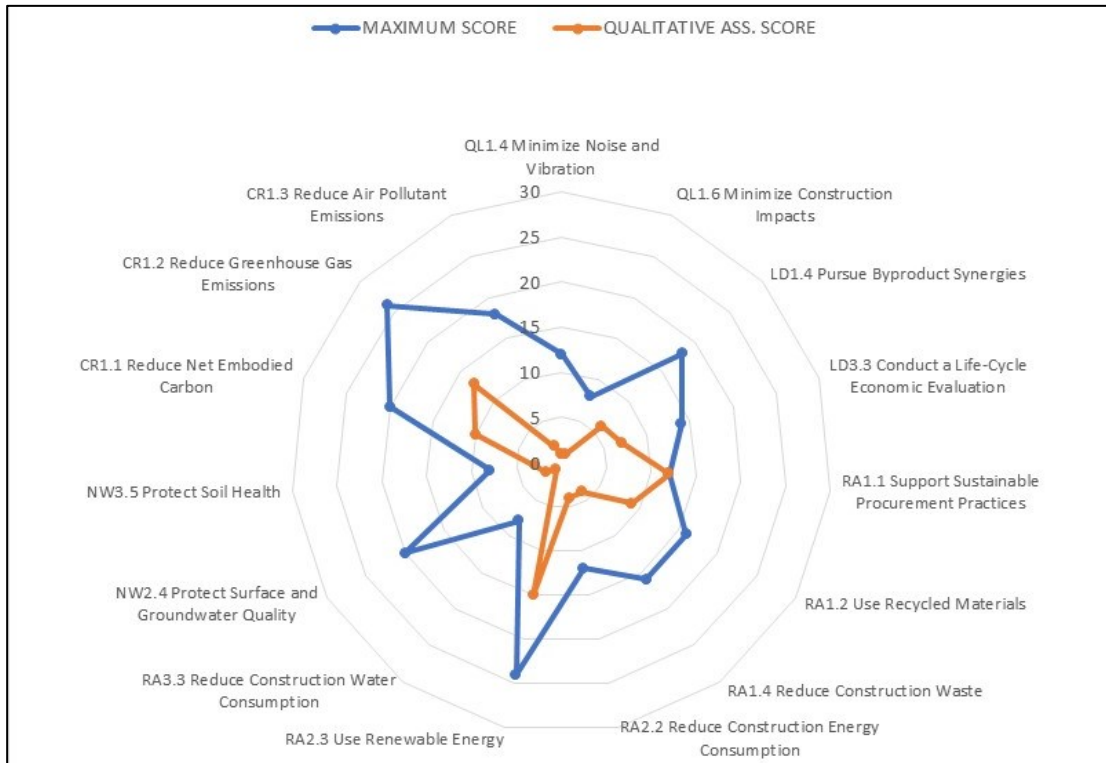


Fig. 8-2, Single fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.

Compared to a maximum reachable of 232 points, this ground improvement process scored 90 points (which means an overall value of 39%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a ‘silver’ rating following Envision rating scale).

- **Qualitative assessment for the double fluid jet grouting technique**

The radar graphic highlights the concentration of top ratings in the domains of resource allocation, and climate and resilience.

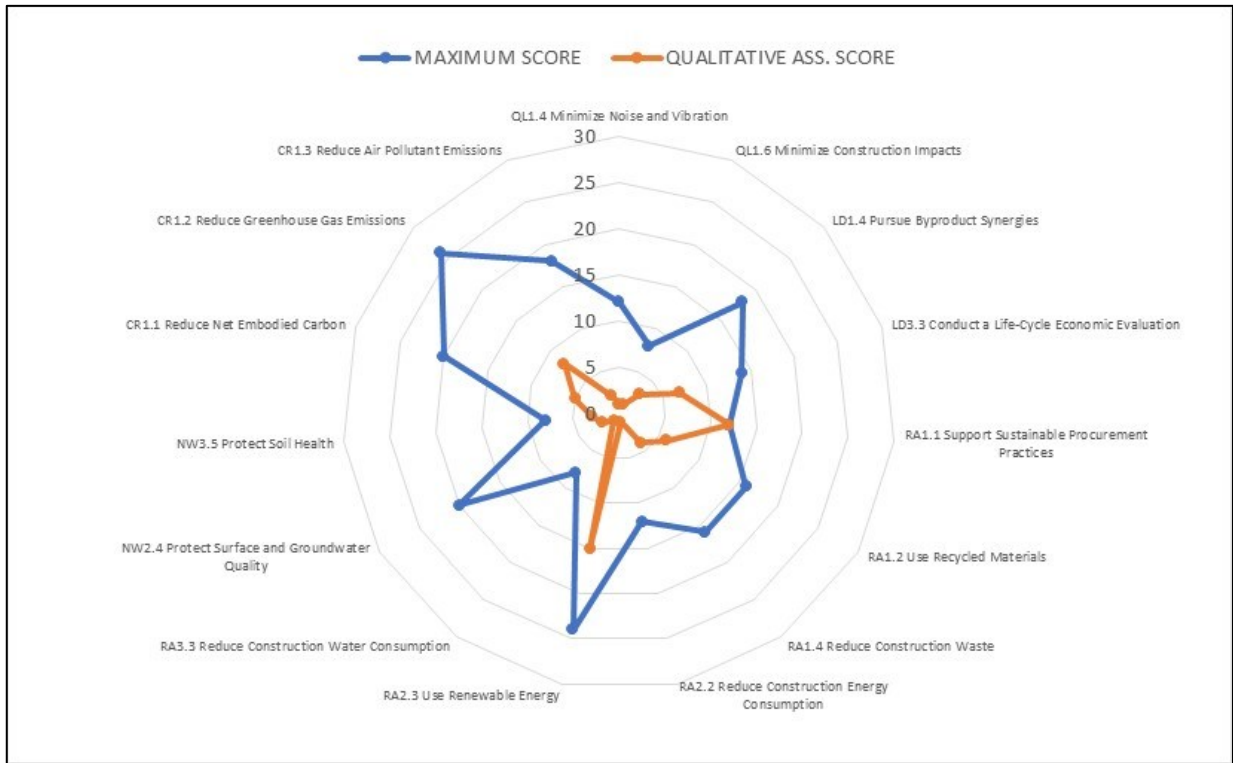


Fig. 8-3, Double fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.

- **Qualitative assessment for the brine ground freezing technique**

In this scenario, the strategy for bettering the earth entirely shifts, and we begin working on freezing the ground instead. A summary of the ratings can be seen below in the table as well as in the radar diagram. The radar diagram, in particular, demonstrates how the highest ratings are often concentrated in the areas of resource allocation as well as climate and resilience.

Compared to a maximum reachable of 232 points, this ground improvement process scored 71 points (which means an overall value of 31%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a ‘silver’ rating following Envision rating scale).

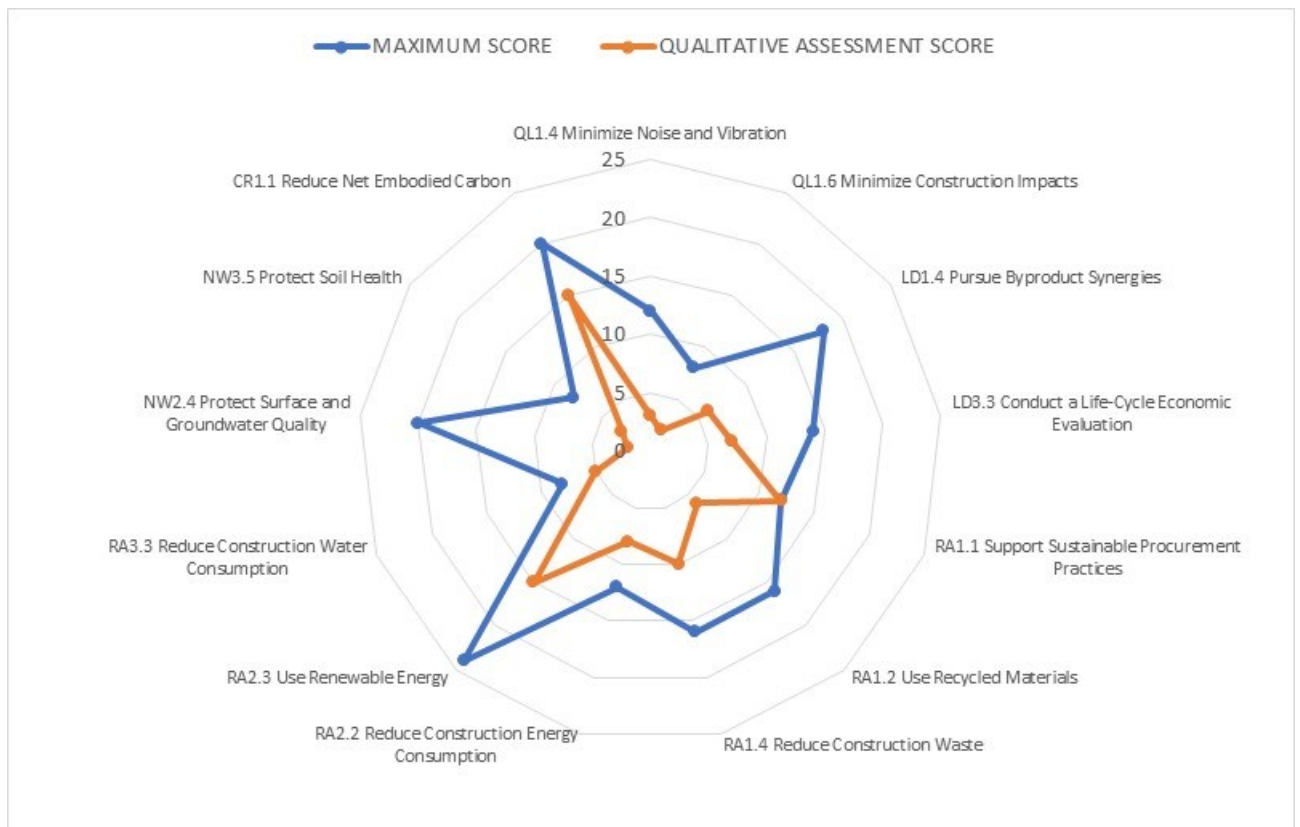


Fig. 8-4, Brine Ground Freezing technique - Diagram of score contribution vs. each Envision indicator.

- **Qualitative assessment for the nitrogen ground freezing technique**

For nitrogen-based freezing, the radar graphic demonstrates how resource allocation and climate and resilience receive the highest scores.

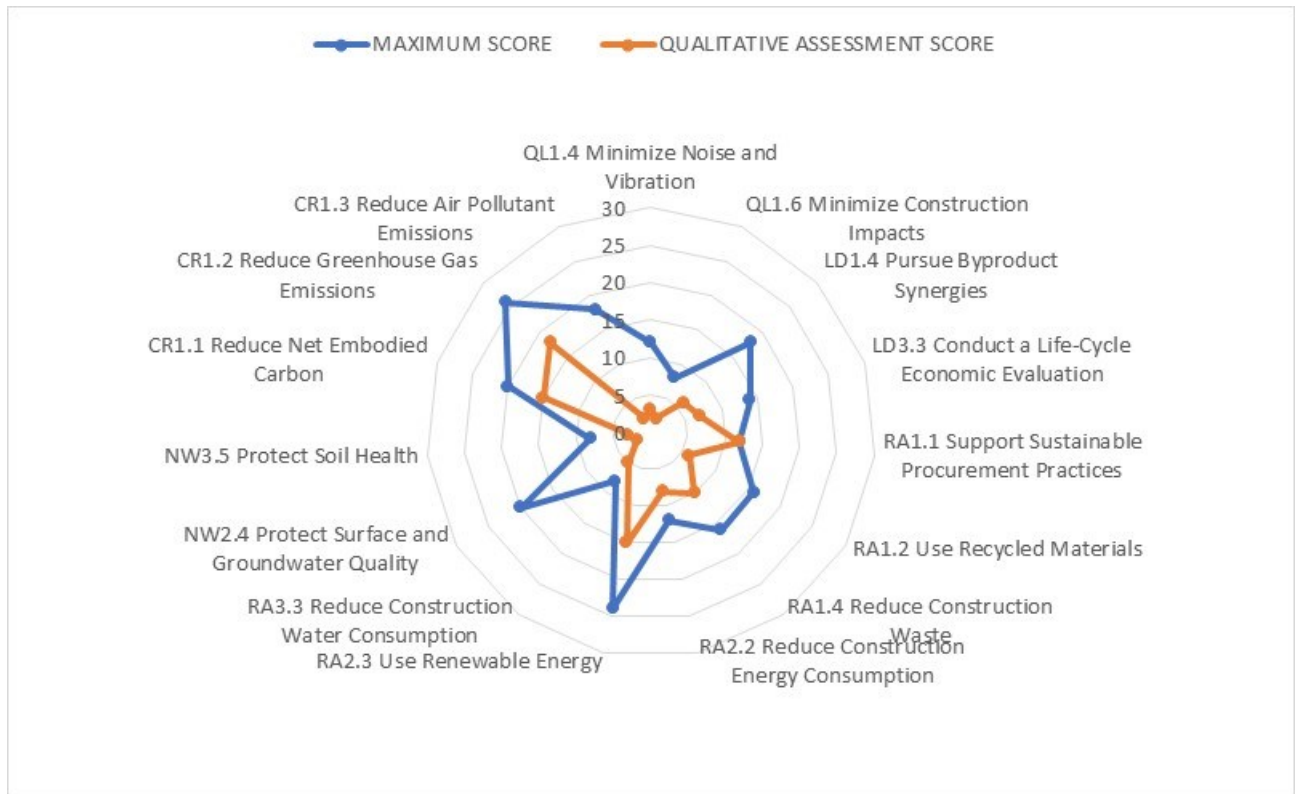


Fig. 8-5, Ground Freezing with Nitrogen technique. Diagram of score contribution vs. each Envision indicator.

Compared to a maximum reachable of 232 points, this ground improvement process scored 114 points (which means an overall value of 49%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a ‘gold’ rating following Envision rating scale).

8.2 Performance comparison at the end of the first phase

The subsequent table provides an overview of the scoring attributed to each approach in relation to each sustainability criteria. The cumulative findings are utilized to determine the overall score inside both the Envision and DNSH frameworks.

In order to assess the ultimate sustainability performance within the Envision/DNSH framework, it is necessary to compare the scores with the maximum attainable and determine the percentage of success.

	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Permeation grouting		Score Single fluid Jet Grouting		Score Double fluid Jet Grouting		Score Brine Ground Freezing		Score Nitrogen Ground Freezing	
			Score	Percentage	Score	Percentage	Score	Percentage	Score	Percentage	Score	Percentage
QL1.4	12	1	1	8%	1	8%	1	8%	3	25%	3	25%
QL1.6	8	1	1	13%	1	13%	1	13%	2	25%	2	25%
LD1.4	18	3	6	33%	6	33%	3	17%	6	33%	6	33%
LD3.3	14	5	7	50%	7	50%	7	50%	7	50%	7	50%
RA1.1	12	3	12	100%	12	100%	12	100%	12	100%	12	100%
RA1.2	16	4	9	56%	9	56%	6	38%	6	38%	6	38%
RA1.4	16	4	7	44%	4	25%	4	25%	10	63%	10	63%
RA2.2	12	1	8	67%	4	33%	1	8%	8	67%	8	67%
RA2.3	24	5	15	63%	15	63%	15	63%	15	63%	15	63%
RA3.3	8	1	3	38%	1	13%	1	13%	5	63%	5	63%
NW2.4	20	2	2	10%	2	10%	2	10%	2	10%	2	10%
NW3.5	8	3	3	38%	3	38%	3	38%	3	38%	3	38%
CR1.1	20	5	15	75%	10	50%	5	25%	15	75%	15	75%
CR1.2	26	3	13	50%	13	50%	8	31%	18	69%	18	69%
CR1.3	18	2	2	11%	2	11%	2	11%	2	11%	2	11%
Envision	232	43	104	45%	90	39%	71	31%	114	49%	114	49%
DNSH	348	68	166	48%	144	41%	114	33%	176	51%	167	48%

Tab. 8-2, First Phase Output: The sustainability performance of the five-ground improvement technique under the Envision and the DNSH scoring.

Points are awarded exclusively when the standard criteria are surpassed. Based on the Envision award criteria, which allocate a minimum achievable score of 20% and categorize scores between 20-29% as verified, 30-39% as Silver, 40-49% as Gold, and 50% and above as Platinum, the performance of the techniques examined indicates that they surpass the verified threshold. Notably, brine ground freezing demonstrates a performance that approaches the Platinum level.

These results are plotted in a radar format (see the next figure) in order to emphasize the ‘distribution’ of the scores with respects to the indicators.

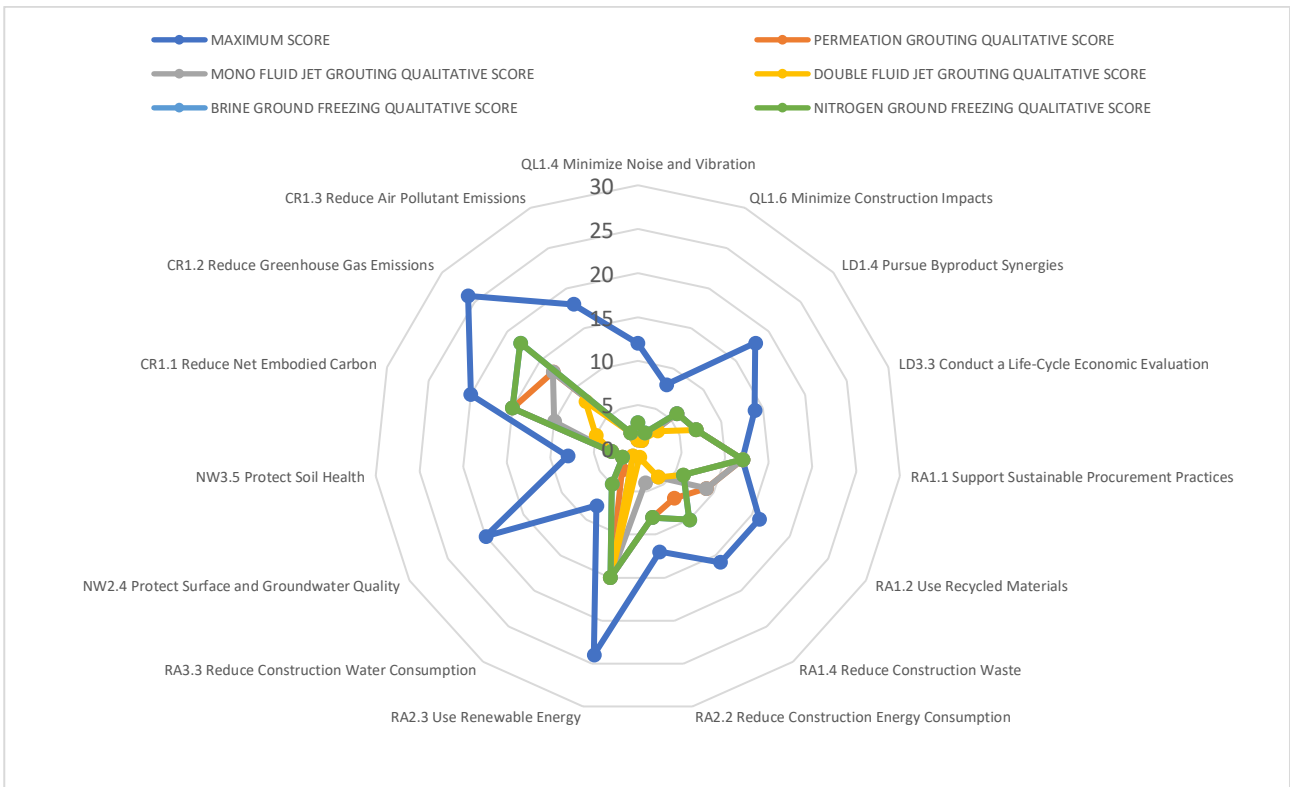


Fig. 8-6, First Phase Output: The sustainability performance of the five ground improvement techniques under the Envision and the DNSH scoring. A comparison through the radar diagram view.

The same results are plotted in a multiple bar format (see the next figure) in order to emphasize the relative performance of the techniques with respects to the indicators.

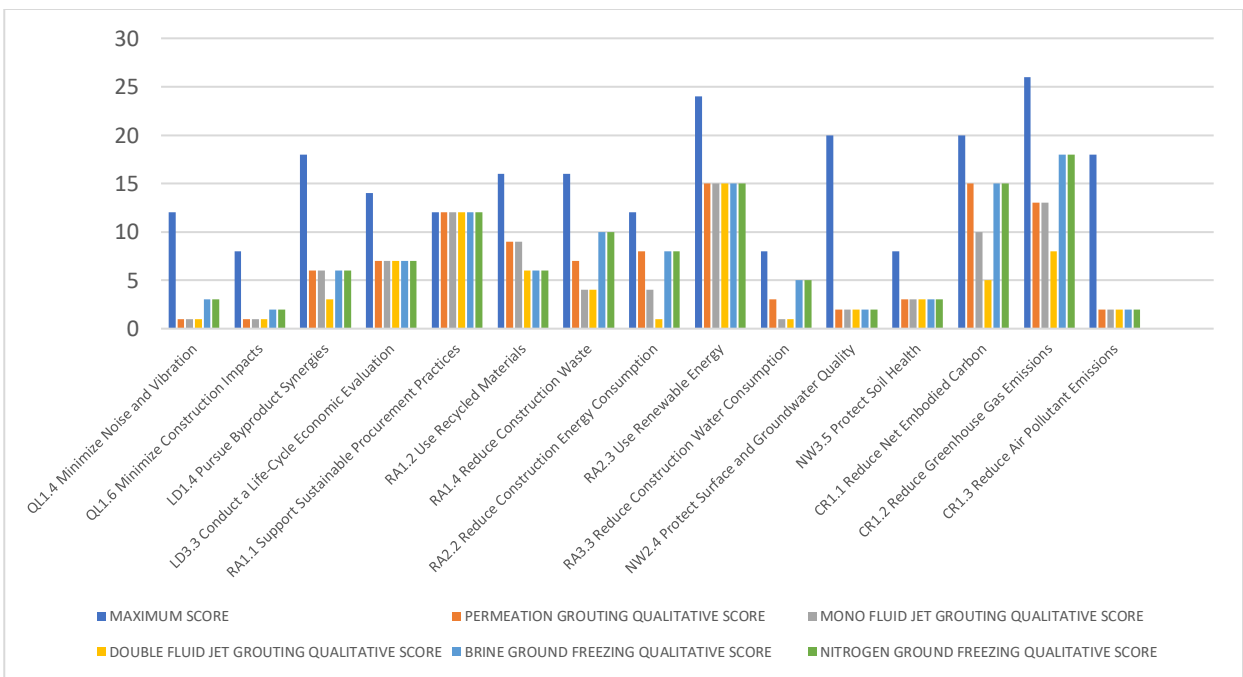


Fig. 8-7, First Phase Output: The sustainability performance of the five ground improvement techniques under the Envision scoring. A comparison for each case and indicator through a bar diagram view.

The diagram demonstrates that, when taking into account the characteristics of the indicators of the Envision/DNSH framework that have been adapted to ground improvement techniques, the area in which to search for more opportunities of good sustainability performances is that which is related to Climate and Resilience (CR1.x, focused on emissions), Resource Allocation (RA1.x, focused on materials and RA2.x focused on energy), and Leadership (LD1.X, focused on collaboration between production sectors). These are the aspects of the process that will receive special focus during the second phase of the approach, which is the life cycle evaluation.

9 The second phase of the sustainability assessment: quantitative evaluation through LCA analyses

9.1 The second phase

This chapter will do a life cycle impact study to evaluate the five ground improvement strategies. The analysis will provide quantitative data, namely the output generated by the numerical models. This data will be utilized to enhance the qualitative assessment that was provided in the preceding chapter.

9.2 Impact frameworks and the choice for the analyses

Methods of a Life Cycle Impact Assessment (LCIA) are used in a Life Cycle Assessment (LCA) to quantify and assess the effects of a given action on the surrounding environment. The life cycle assessment (LCA) begins with the collection of raw data on emissions, waste, and material production. These data must then be converted into a numerical result that is available for interpretation.

Because of the complexity and interconnection of the environment, determining the range of ways in which the environment is impacted and the magnitude of those affects is not a straightforward endeavor. This problem is addressed by the LCIA approaches, which categorize and classify the many kinds of affects that activities have on different parts of the environment, such as the amount of water used, how climate changes, or how poisonous the environment is. The many emissions that result in the same impact are consolidated into a single unit, which then gets mapped onto a single category of impact. As a result, the end result of an LCA will be given in terms of these many classifications.

Depending on the primary purpose of the investigation, several techniques are utilized to quantify various types of effect categories. The adoption of a particular LCIA technique may be a requirement of the standards, as could the requirement to report on particular impact categories.

Because of its relevance in the construction field, the Environmental Footprint (EF) method was adopted. The Joint Research Centre (JRC), which serves as the research and knowledge service for the European Commission, oversaw the Environmental Footprint program. The project was formally kicked off in 2013, and it has since been split into two phases: the Pilot phase, which lasted from 2013 to 2018, and the Transition phase, which will continue through 2019. The framework presented in the following pages is dated 2021⁴⁴.

9.3 The European Environmental Footprint framework

One of the fundamental principles of life cycle thinking is that it offers an exhaustive point of view in identifying impacts and related mitigation opportunities in the phases of choosing materials and approaching the strategy of infrastructure management.

Each of the processes or technological strategies that make up the life cycle, whether a material or a construction technology, incorporates the evaluation of energy and resource consumption and the related emission of polluting substances. The extraction and manufacturing processes involved in the production of building materials are responsible for approximately 90% of the environmental pollutants produced during the life cycle of these components. The use of fossil fuels results in emissions of nitrogen oxides (NO_x) and carbon dioxide (CO₂), which contribute to the adverse environmental effects that occur during transportation and construction. Waste management, especially in construction, often involves the removal of plaster and wood waste, both of which are significant sources of organic acid in landfills. When wood, plastic, and paper are

⁴⁴ https://environment.ec.europa.eu/news/environmental-footprint-methods-2021-12-16_en

burned, pollutants such as ammonia (NH₃), heavy metal ions, and volatile organic compounds (VOCs) are produced. Each of these pollutants can potentially adversely affect human health and the environment.

Every construction material and technological device incorporates a part of it to be the arrival point of a technological chain that reaches the finished component from the extraction of primary resources.

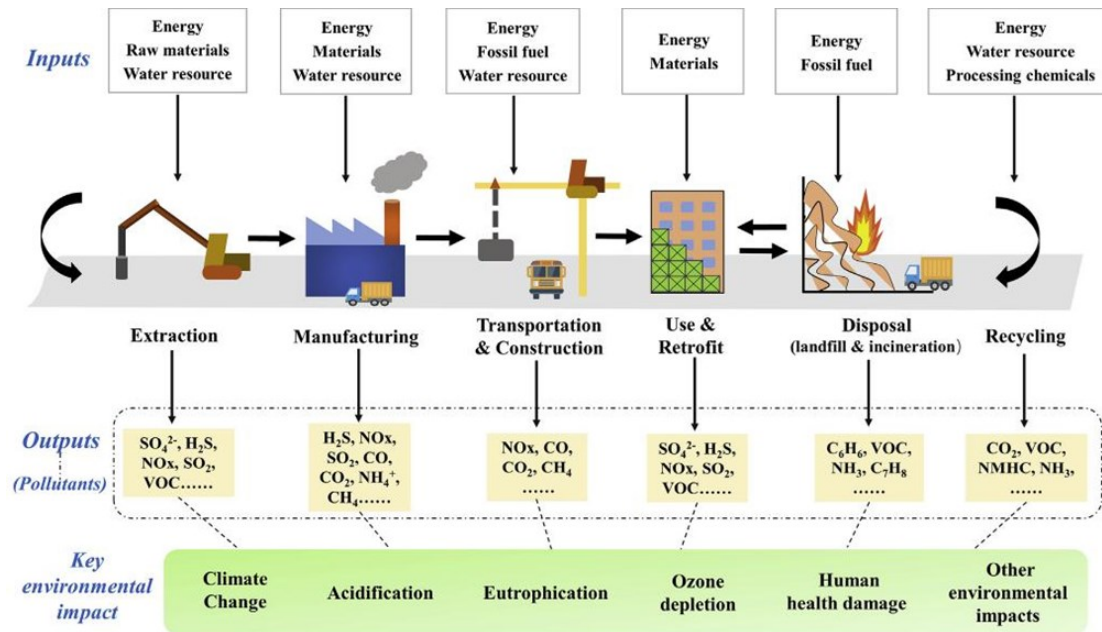


Fig. 9-1, Key Environmental Impacts during the Life Cycle of Building Materials [Huang, 2020]

The European Union has acted as a driving force in the process of implementing the life cycle concept in European product policies over the last two decades [Zampori et al., 2019]. In particular, Communication COM/2003/302 on Integrated Product Policy has created the primary conditions for the continuous improvement of the environmental performance of all goods during the relevant production, use, and disposal phases. The life cycle approach has become an important lever to guide European policies and investments toward the environmental sustainability objectives the European Union has committed to pursuing (e.g. COM/2019/640 on the European Green Deal).

Making decisions that have an impact on production processes with a very distant life horizon requires a systemic approach to avoid the feedback that arises from a restriction or conditioning on a part of the system (for example, production), does not result in an amplification of unwanted effects on another party, this is the meaning of the concept of ecological footprint [Damiani, 2022]. In this sense, LCA is the ideal tool precisely because its purpose is to allow an exhaustive investigation of the possible environmental effects that may derive from a specific decision-making procedure. In fact, it combines:

- A life cycle focus: this means that all the stages of a product or service are taken into account, from the extraction of raw materials through processing and production, distribution and use, and the end of life.
- A type of analysis considering a series of distinct environmental effects, effectively a multi-criteria analysis.
- A quantitative methodology: the indicators used are numerical and derived from mathematical models that describe cause-and-effect links and result from various stress factors. (e.g., emissions and use of natural resources).
- A comparative methodology: the life cycle assessment (LCA) method is primarily intended to enable the selection of the optimal course of action between two or more potential outcomes, given the quantitative character of the approach.

- The horizon of the global scale: the analysis can be adapted to systems ranging from the local to the global scale, thus capturing the particularities of these systems concerning the variability of their environments.

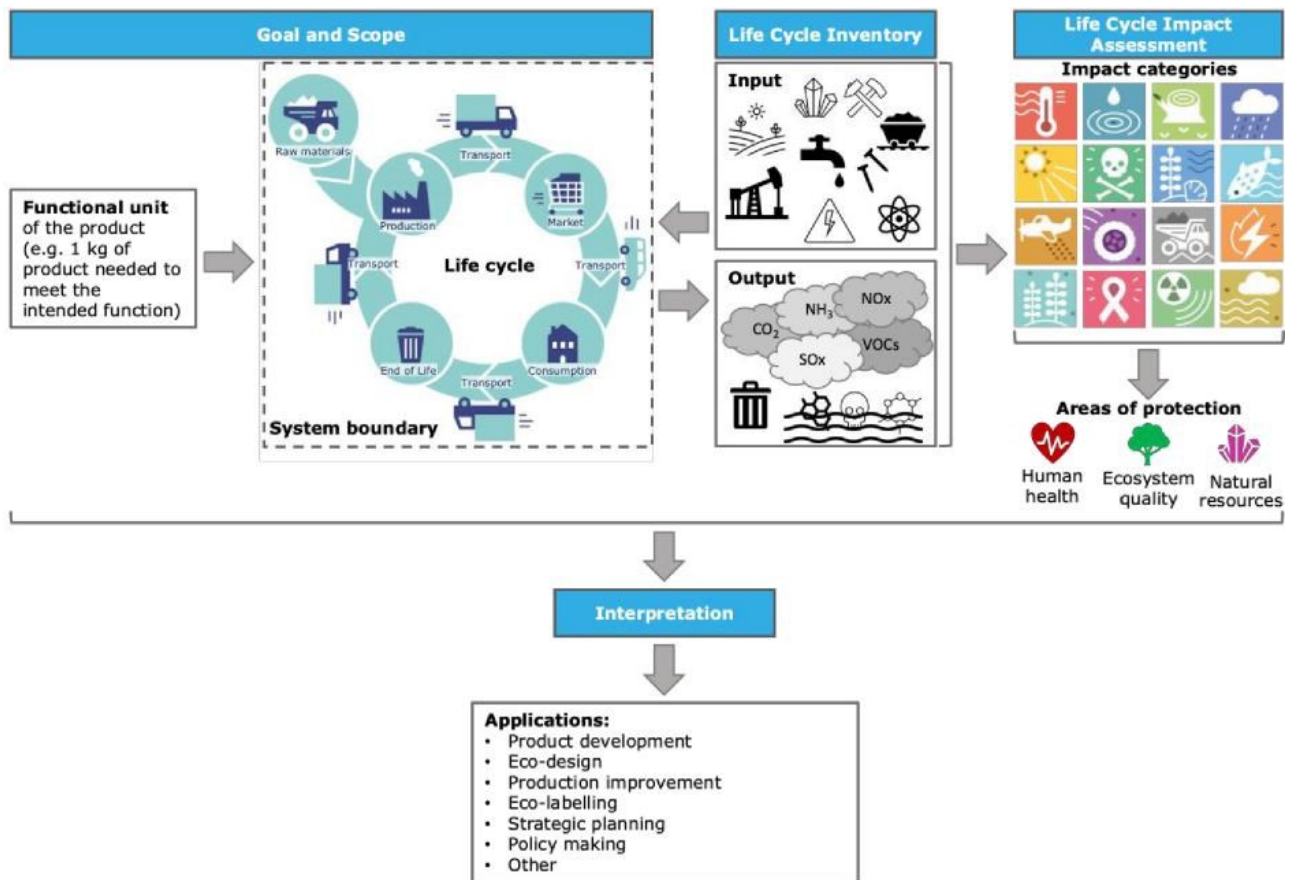


Fig. 9-2, The Environmental Footprint Framework (Usman, 2022).

The LCA methodology is standardized by regulatory references (ISO 14040 and ISO 14044), which describe the principles, application, phases of an LCA study, requirements, critical review, and reporting. Other ISO standards in the 14040 series complement the general guidelines, such as ISO 14046 for water footprint, and other environmental management standards are linked to ISO 14040-44, such as ISO 14006 (eco-design), ISO 14025 (environmental labeling), ISO 14064 (carbon footprint of organizations), ISO 14067 (carbon footprint of products), ISO 14072 (organizational LCA). In this way, the methodology and approach are uniform and transparent.

1 - Goal and scope definition	2- Life Cycle Inventory Analysis	3 - Life Cycle Impact Assessment
<ul style="list-style-type: none"> ● Reasons and intended applications ● Functional unit ● System boundary ● Impact categories ● Allocations ● Data requirements ● Assumptions and limitations 	<p>Collection of primary and secondary data on elementary and non-elementary flows exchanged through the ecosphere and the technosphere:</p> <ul style="list-style-type: none"> ● input of energy, raw materials, and other physical inputs ● output of products, co-products, waste, emissions. <p>Data calculation relating to unit processes, functional unit, and allocations.</p>	<p>Calculation of potential impact associated to the defined impact categories from inventory data.</p> <p>Optional grouping, normalisation, and weighting.</p>
4 - Interpretation		
<p>Interpretation of LCIA results, hotspot analysis to find relevant processes and flows, sensitivity analysis of modelling choices, recommendations. The interpretation may involve iteratively reviewing the choices made in the previous stages of the LCA.</p>		

Tab. 9-1, Standardized steps of LCA according to ISO 14040-44

The Joint Research Center of the European Commission has significantly contributed to the standardization of LCA by establishing the European International Life Cycle Data System (ILCD). In order to improve the scientific robustness, coherence, reproducibility, and comparability of LCA studies, the objective of the ILCD was to provide in-depth guidelines for the application of LCA to the European context, both from the procedural and scientific.

9.4 The software used for modelling and the implementation of the Environmental Footprint framework

The application to the case study of the five ground improvement techniques is analyzed with a LCA model, as the second step of the proposed three-phased method.

The LCA analyses are performed in this thesis with the software Simapro (rel. 9.5.0.0, 2023) [Pré Consultants, 2018].

The impact framework adopted in the analyses is the Environmental Footprint (EF) method 3.0, originated by an initiative of the European Commission. The method, supported by SimaPro database, includes a number of adaptations, which make the EF method 3.0 implemented compatible with the data libraries provided in SimaPro.

The implementation of the method in Simapro is based on EF method with the following modifications:

- it does not include any substances, which would be new to SimaPro, e.g. regionalized land use flows;
- additional substances have been included as they are extensively used by the background databases and their synonyms are part of the original EF method [Pré Consultants, 2018].

Characterization.

The characterization phase of the analysis models the categories in terms of indicators, and, if possible, provides a basis for the aggregation of the inventory input and output within the category.

Characterization is mainly a quantitative step based on scientific analysis of the relevant environmental processes. The characterization assigns the relative contribution of each input and output to the selected impact categories. The potential contribution of each input and output to the environmental impacts is estimated and for some of the environmental impact categories there is consensus about equivalency factors to be used in the estimation of the total impact (e.g. global warming potentials, ozone depletion potentials etc.) whereas equivalence factors for other environmental impacts are not available at consensus level (e.g. biotic resources, land use etc.), depending on the adopted framework. 18 impact categories have been considered.

Normalization.

The global normalization set for a reference year 2010 is part of the EF method. These normalization values are updated for the EF 3.0 method in November 2019 and implemented in Simapro.

Many methods allow the impact category indicator results to be compared by a reference (or normal) value. This means that the impact category (in its own unit of measurement) is divided by the reference (with the same unit of measurement). A commonly used reference is the average yearly environmental load in a country or continent, divided by the number of inhabitants. This can be useful to communicate the results to non LCA experts. For our study, we considered the European Community region.

After normalization the impact category indicators are represented by a common unit, which makes it easier to compare them. Normalization can be applied on both characterization and damage assessment results.

Weighting.

The weighting is based on the LCA method assumed: in this case the above-mentioned Environmental Footprint.

The EF 3.0 method only has a single weighting set, which includes toxicity and allow weighting across impact categories. This means the impact (or damage) category indicator results are multiplied by weighting factors and are added to create a total or single score.

How the results will be presented.

The results of the LCA are included in Appendix 2⁵. For each case study, they are presented in terms of characterization, normalization, weighting, and finally single point views. Where needed, there is an additional and specific analysis performed for the relevant subprocesses.

The following paragraphs include, for each of the 5 studied cases, a schematic description of the design intervention. Then it is reported a discussion of the LCA results, showing the process scheme adopted and highlighting the most impacting aspects, according to the weighted view of the results analysis for each impact, and the single point view referred to the main phases identified for each considered soil treatment technology.

As a conclusive paragraph, there five case studies are compared.

9.5 LCA analysis for ground improvement treatment using the permeation grouting technique

The schematic design of the permeation grouting intervention

The PG treatment is performed via 82 PVC sleeved pipes installed in the ground. The injection action ray and the distances between the pipes are such that the theoretical cylindrical volume of soil by a TAM has radius of 0,75m. A distance of 1,20 m is fixed between the pipes, placed along 2 rows. The treated soil wall has a thickness of 2,55 m, for a total volume of 472m³.

The treatment is performed in order to penetrate the clayey layer for about one meter, in order to create a proper connection between the vertical treated wall and the impervious bottom, guaranteeing the watertightness the excavation. The thickness of 'improved' soil acts as a gravity and waterproofing wall that allows the further excavation to be conducted safely.

The study has taken into account a single daily shift of 8 hours for the works. The drilling operation was conducted over a period of four days, utilizing a single diesel drilling rig. The assessment additionally took into account the positioning of the rig for each hole. The execution of sheaths, facilitated by the employment of a modern mixer, has been estimated to take one day.

During the grouting step, it was intended for two electrical injectors to be utilized, with each injector having an average flow rate of 0.3 cubic meters per hour. The treatment involved injecting grout volume equivalent to 28% of the theoretical soil to be treated in two stages. The sequence of these stages is not crucial for the evaluation. The treatment required a total of 31.5 shifts (days) to be completed. The grout was prepared using an electrical turbomixer, then transferred to an electrical mixer agitator, and finally pumped into the injector.

⁵ The LCA analysis is taken from the PhD thesis of the co-authors of this research (Stefano Susani), who is a certified Envision SP professional. See also note 2

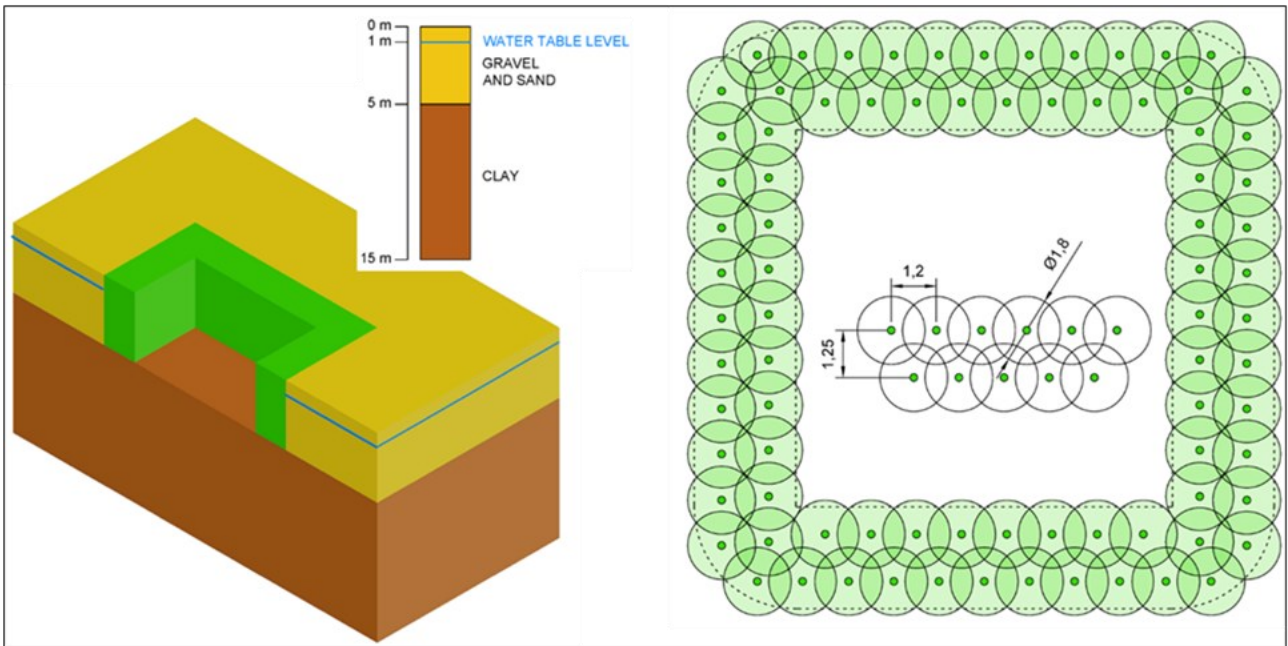


Fig. 9-3, Permeation grouting treatment: geometrical data.

The present study examines a standard ternary grout mixture, characterized by the following weight ratios: cement to water (C/W) ratio of 0.4, binder to cement (B/C) ratio of 0.1, and an additive comprising 1% of the total weight of cement.

Permeation grouting LCA analysis

The findings of the life cycle assessment (LCA) analysis for the permeation grouting case study are presented and discussed in Appendix 1.

The following chart shows the process scheme of the PG treatment modeled in the LCA.

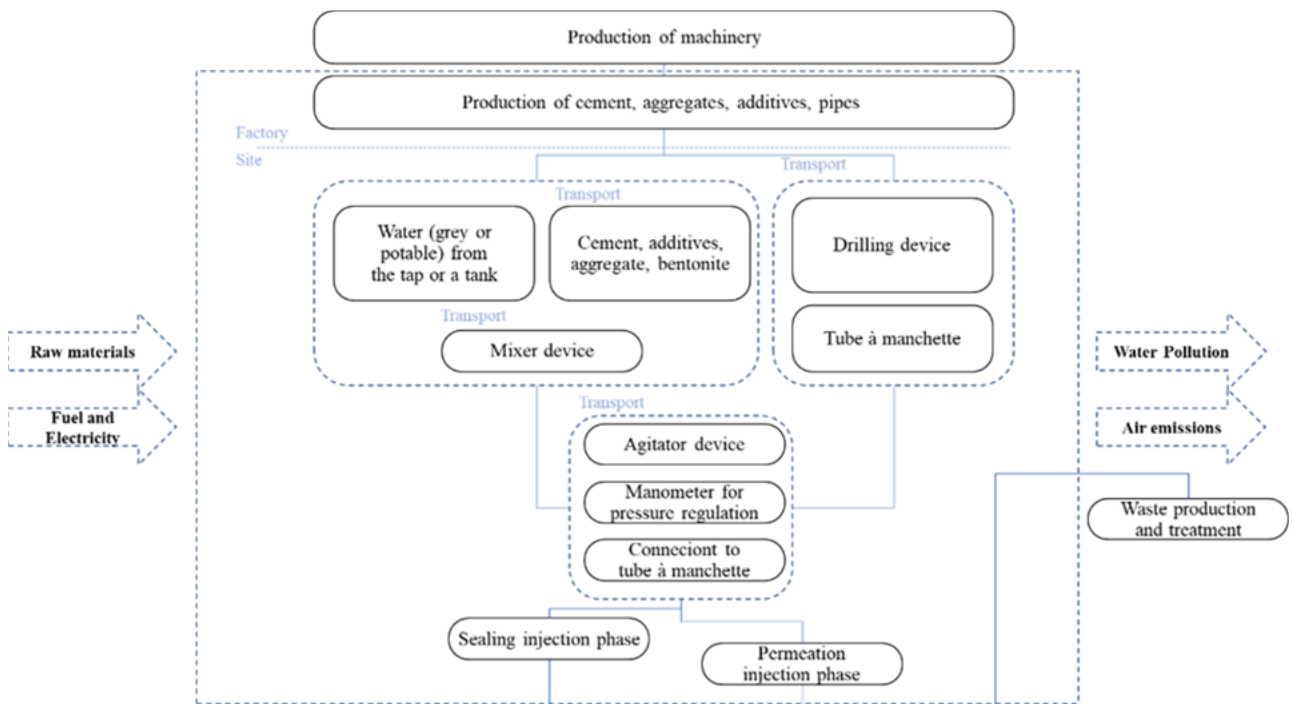


Fig. 9-4, Process scheme for LCA Analysis of the permeation grouting technique.

The following main conclusions can be drawn regarding the permeation grouting technique (see also the comments included in Annex 2):

1. The grout mix preparation is the more impactful working phase of the process; its impacting contribution, compared to the total, is equal to 83.3%,
2. A deepening in the assessment of this operational phase shows that the cement provides strongly the major impact, if compared to water, additives, bentonite and grout mixing activity, i.e. the other actors of the analyzed phase
3. the other relevant contribution is given by the drilling phase with 13.6%, where are summed the effects of the drilling operation and the plastic TAM provision and installation in the ground, the latter activity carried out by using the same cement-based mixture grouted in the soil.
4. the most impacted categories are climate change and, at a minor level, resource depletion;

Keeping this analysis as the baseline, the two points above can drive the sensitivity analysis that follows.

Permeation grouting LCA sensitivity analysis

The indication provided by the qualitative assessment with Envision (i.e. the main levers to focus on) and by the outcomes of the LCA analysis just presented can be assumed as requirements or suggestion for possible sustainability upgrades as it follows:

- Energy focus: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation focus: Improving the rating of diesel transportation fueled trucks.
- Material focus: for cement, reduce the content in clinker (through pozzolana or fly ash additions).

To the aim of including these upgrades with respect to the original LCA baseline just described in detail, another sensitivity run of the LCA model has been performed with these upgrades:

- Energy: use of an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string.
- Cement: use of Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string.
- Steel: use of iron coming from scrap, through the Ecoinvent string.
- Transportation: use of trucks Euro6 instead of Euro5, through the Ecoinvent string.

The analysis is only indicative, because of the ‘generic’ nature of the data coming from the Ecoinvent database, and more could be done using customized EPDs or material oriented LCAs provided by suppliers, still this sensitivity calculation can give a measure of how much the sustainability performance of the technique could vary in the light of the suggestions coming from the Envision indicators and the LCA baseline analysis.

This is a crucial aspect of the research on the ground improvement treatment sustainability: on one hand the data nowadays available are still very generic, and as we will see in the prosecution, this may affect some results from the set of analysis proposed. Here comes the already highlighted importance of the EPD, as pointed out in the final chapters by commenting the results. Appendix 2 provides a deepening about this focus.

The following table includes a comparison between the baseline and sensitivity analysis outcomes. The final column on the right provides a summary of the percentage gains and losses relative to the baseline. The detailed commentary on the table will be provided in the third phase of the technique. However, it is evident that there was a significant reduction (-16.38%) in the quantity of CO₂eq, as well as in all other key performance indicators (KPIs) pertaining to energy and materials usage.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
			Climate change	44,89%	36927,3063	44162,18116	kg CO2 eq	-16,38%
Cement	42751	kg	Ozone depletion	0,00%	0,00251736	0,002792854	kg CFC11 eq	-9,86%
Energy-Electricity	2995	kWh	Ionising radiation	0,00%	1824,891663	2115,313875	kBq U-235 eq	-13,73%
Energy-Diesel	3200	kWh	Photochemical ozone formation	4,77%	86,75967776	100,1871036	kg NMVOC eq	-13,40%
Steel	0	kg	Particulate matter	5,03%	0,000714601	0,000796777	disease inc.	-10,31%
T.A.M.	320	kg	Human toxicity, non-cancer	0,00%	0,000229547	0,000273693	CTUh	-16,13%
Sludge waste	6.36	m3	Human toxicity, cancer	0,00%	7,50983E-06	8,23528E-06	CTUh	-8,81%
Water	105900	kg	Acidification	5,46%	104,6875206	122,6914512	mol H+ eq	-14,67%
			Eutrophication, freshwater	7,09%	8,701845279	9,421410615	kg P eq	-7,64%
			Eutrophication, marine	0,00%	32,5224058	37,41534811	kg N eq	-13,08%
			Eutrophication, terrestrial	0,00%	338,0142282	393,5065501	mol N eq	-14,10%
			Ecotoxicity, freshwater	4,76%	226507,5325	273202,0088	CTUe	-17,09%
			Land use	0,00%	261138,5881	323969,1919	Pt	-19,39%
			Water use	0,00%	10677,62947	11477,57963	m3 depriv.	-6,97%
			Resource use, fossils	13,99%	233873,1103	264587,2741	MJ	-11,61%
			Resource use, minerals and metals	0,00%	0,018859693	0,020534279	kg Sb eq	-8,16%

Tab. 9-2, Case Study Permeation grouting, sensitivity analysis vs. baseline, total impact indicators, characterization.

9.6 LCA analysis for ground improvement treatment using the single fluid jet grouting technique

The schematic design of the single fluid jet grouting

The JG-SF requires the execution of a total of 202 jet grouting columns, arranged in three rows, surrounding the excavation site. Considering the site soil nature, a diameter of 1.0m has been designed for the columns, with an inter-distance between the centers of 0.75m. The spacing between the rows is 0.9 meters. The purpose of this geometric pattern is to create a jet grouted soil "wall" that is approximately 2.5 meters thick, covering a treated soil volume of 540 m³.

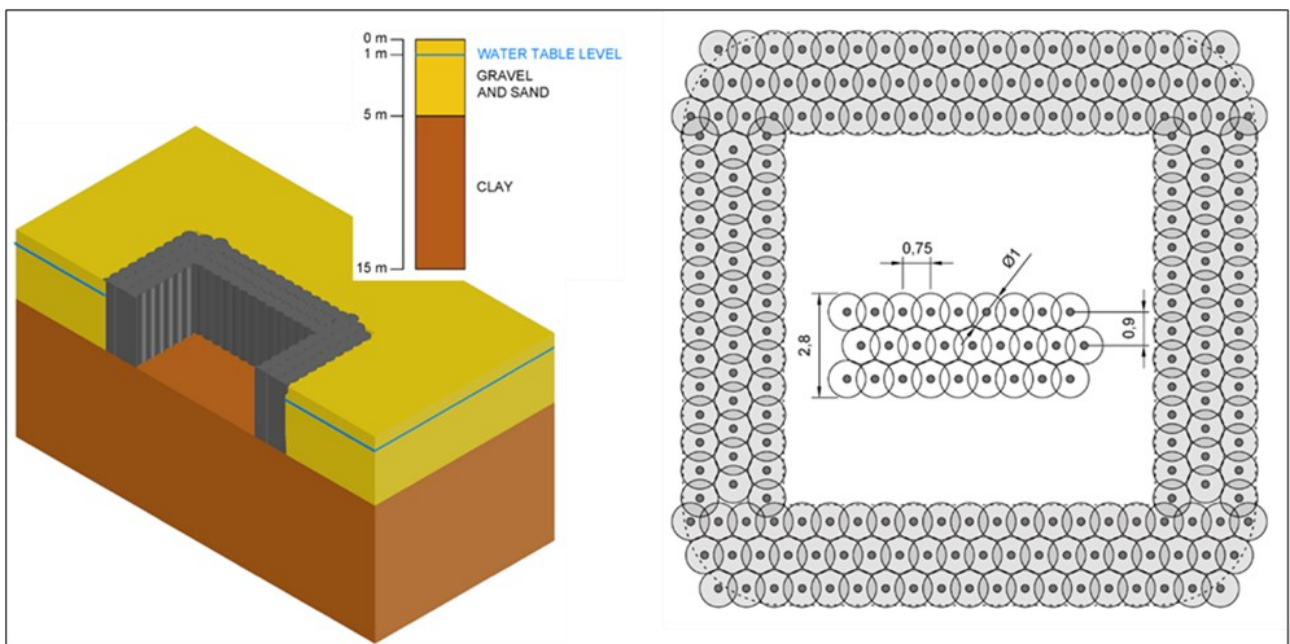


Fig. 9-5, Jet Grouting single fluid technique: geometrical data of the treatment.

The study has taken into account a single daily shift of 8 hours for the works. It is assumed that the average drilling production rate is 30 meters per hour. This rate includes the positioning of the drilling unit on each column axis. As a result, the cumulative duration of the drilling phase for the columns amounted to 34 hours.

During the jet grouting phase, the selection of operational parameters such as pressure, cement quantity, and uplift velocity was determined based on the natural soil composition and density. A standard mixture for the jet grouting treatment, characterized by a ratio 1 between cement and water ($C/W=1$). To achieve the desired results, a pressure of 40 MPa was applied, accompanied with the injection of about 323 tons of 32.5 Portland cement via 2 nozzle $\varnothing 3$ mm. The uplift velocity during this process was maintained at 20.6 m/h. The completion of all the columns necessitated around 40 hours. In addition to this, consideration was given to the operation of an electric mixer for the preparation of the grout mixture, a high-pressure pump for the injection process, and the drilling unit the latter with a diesel engine.

A spoil output rate of 50% was assumed for the amount of soil that was treated.

Jet grouting single fluid LCA analysis

The findings of the life cycle assessment (LCA) analysis for the permeation grouting case study are presented and discussed in Appendix 2.

The energy and material flow diagram for this type of treatment is presented in the picture seen below. The scheme delineates the parameters of the system under consideration in the model.

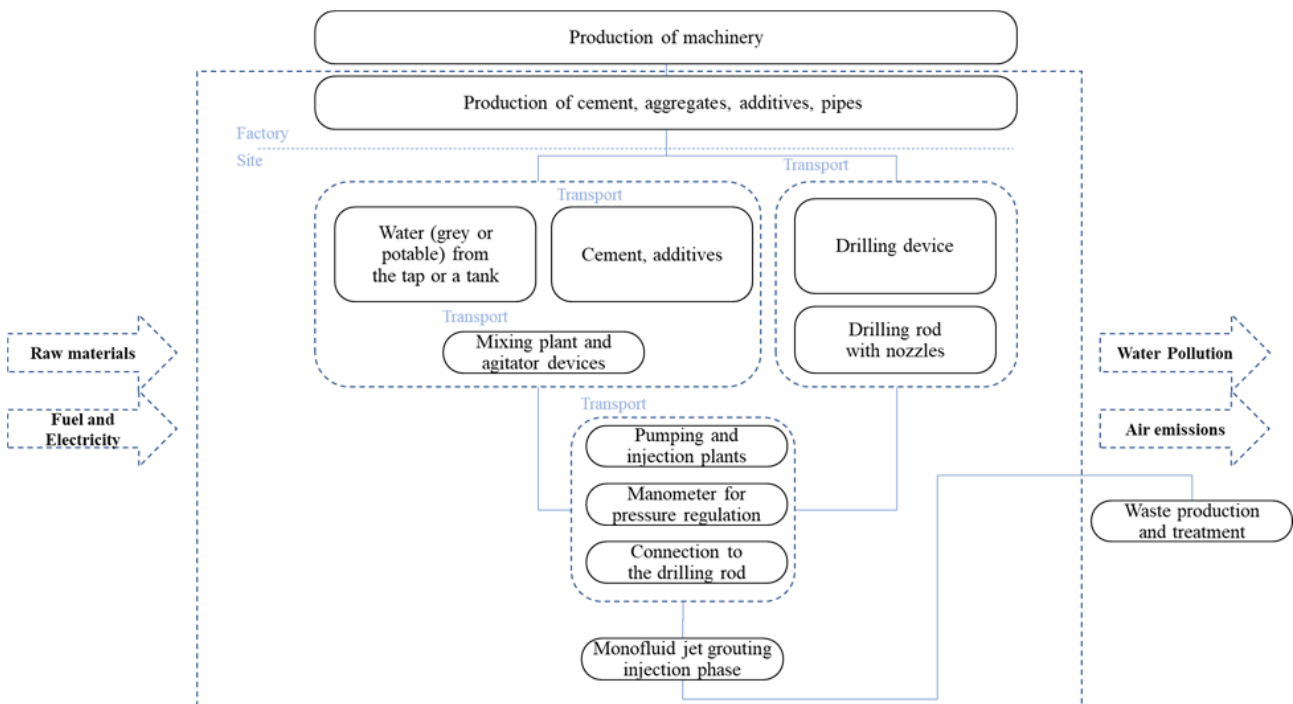


Fig. 9-6, Process scheme for LCA Analysis of the single fluid Jet Grouting technique.

The following conclusion can be drawn about the jet grouting single fluid technology (see also Annex 2 and the included comments):

1. the grout mixture preparation is, also for JG-SF, the most impactful phase; the role of the product “cement” comes out again as the prominent, by the single point representation of the grout-mix

- preparation phase agents. The impacting contribution of the cement-based grout mixing, compared to the total, is of 92,0%;
2. the other relevant contribution is given by the high-pressure injection, with 4,50%. This depends on the energetic consumption of the pumping plant, operating during the whole jet grouting process;
 3. the most impacted categories are the climate change, and to a lesser extent the resource depletion.

Keeping this analysis as the baseline, the two points above can drive the sensitivity analysis that follows.

Jet grouting single fluid LCA sensitivity analysis

The recommendations derived from the qualitative evaluation conducted with Envision (i.e., the primary areas of emphasis) are as follows:

- Energy: Enhance efficiency in energy usage by (a) minimizing reliance on diesel engines for power generation and (b) utilizing electricity sourced from suppliers employing a diverse mix of renewable energy production methods.
- Transportation: Enhancing the performance of trucks powered by diesel fuel.

One potential approach to reducing the content of clinker in cement is by including alternative binders such as pozzolana or fly ash.

In order to incorporate the aforementioned sustainability enhancements in relation to the comprehensive description of the original Life Cycle Assessment (LCA) baseline, an additional iteration of the LCA model has been conducted, including these improvements.

- The proposed energy solution involves utilizing a combination of fossil fuels and renewable sources, with a distribution of 70% and 30% respectively. An example of a renewable source that may be incorporated is hydroelectric power generated from run-off river systems. This energy mix will be implemented using the Ecoinvent string.
- It is recommended to utilize Pozzolana-based cement as an alternative to Portland-based cement, as shown by the Ecoinvent string
- Steel: use iron coming from scrap, through the Ecoinvent.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string.

The analysis provided, as already pointed out, is merely suggestive due to the inherent generality of the data sourced from the Ecoinvent database. However, further improvements can be made by utilizing customized Environmental Product Declarations (EPDs) or conducting material-oriented Life Cycle Assessments (LCAs) provided by suppliers. Nevertheless, the sensitivity calculation presented offers an indication of the potential enhancements that can be achieved in the sustainability performance of the technique, taking into account the recommendations derived from the Envision indicators.

The subsequent table presents a comparative analysis between the baseline and sensitivity runs. The utilization of a more sustainable composition for concrete, coupled with a combination of fossil and renewable energy sources, results in a noteworthy decrease of around 18.15% in carbon dioxide equivalent emissions (CO₂eq).

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	323000	kg	Climate change	0,00%	243865,88401	297937,36176	kg CO ₂ eq	-18,15%
Energy-Electricity	16497	kWh	Ozone depletion	0,00%	0,01146	0,01348	kg CFC11 eq	-15,02%
Energy-Diesel	2516	kWh	Ionising radiation	4,52%	10917,13489	13043,89158	kBq U-235 eq	-16,30%
Steel	0	kg	Photochemical ozone formation	4,34%	474,33955	578,32742	kg NMVOC eq	-17,98%
T.A.M.	0	kg	Particulate matter	0,00%	0,00356	0,00419	disease inc.	-15,05%
Sludge waste	214	m ³	Human toxicity, non-cancer	0,00%	0,00153	0,00187	CTUh	-17,81%
Water	323000	kg	Human toxicity, cancer	5,50%	0,00003	0,00004	CTUh	-15,03%

Acidification	5,44%	609,58859	745,56100	mol H+ eq	-18,24%
Eutrophication, freshwater	0,00%	38,60662	43,87501	kg P eq	-12,01%
Eutrophication, marine	0,00%	177,78931	215,75604	kg N eq	-17,60%
Eutrophication, terrestrial	5,05%	1919,40385	2349,61079	mol N eq	-18,31%
Ecotoxicity, freshwater	0,00%	1388365,93687	1734046,34667	CTUe	-19,93%
Land use	0,00%	1809977,69765	2269326,77323	Pt	-20,24%
Water use	11,96%	33285,37621	38826,54247	m3 depriv.	-14,27%
Resource use, fossils	0,00%	1154790,30521	1379881,30282	MJ	-16,31%
Resource use, minerals and metals	0,00%	0,05613	0,06825	kg Sb eq	-17,76%

Tab. 9-3, Case Study Jet Grouting Single fluid, sensitivity analysis vs. baseline, total impact indicators, characterization.

9.7 LCA analysis input for ground improvement treatment using double fluid jet grouting

The schematic design of the double fluid jet grouting

The JG-DF system requires the execution of 84 jet grouting columns with a diameter of 2.50 meters, arranged in two rows on either side of the excavation area. The spacing between the columns is 1.20 meters, while the space between the rows is designed as 1.25 meters. The column pattern is engineered to generate a jet grouted soil wall with enhanced properties, measuring around 2.5 meters in thickness. The total volume of soil treated using this method amounts to 540 m³.

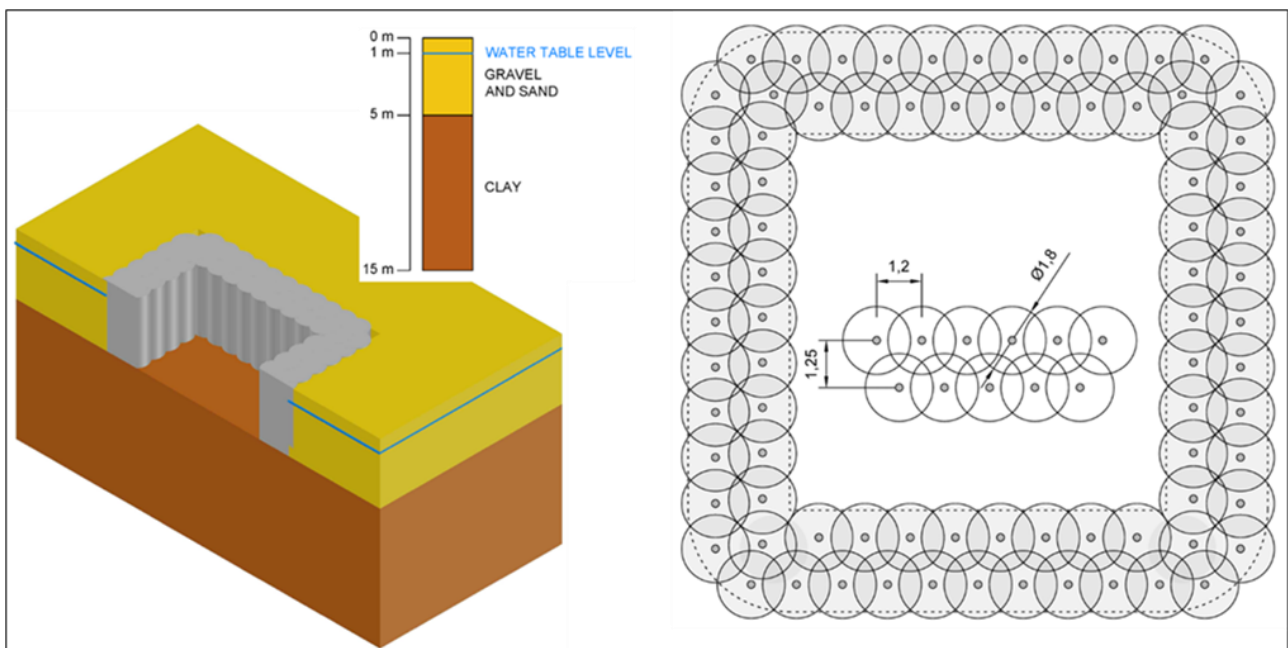


Fig. 9-7, Jet grouting with double fluid technique: geometrical data.

The study has taken into account a single daily shift of 8 hours for the works. It is assumed that the average drilling production rate is 30 meters per hour. This rate includes the positioning of the drilling unit on each column axis. As a result, the cumulative duration of the drilling phase for the columns amounted to 14 hours.

During the jet grouting phase, the selection of operational parameters such as pressure, cement quantity, and uplift velocity was determined based on the natural soil composition and density. To achieve the desired results, a grout pressure of 50 MPa was applied for the injection of about 425 tons of 32.5 Portland cement, via 1 nozzle Ø5,5 mm. The air was pumped with pressure of 8 bar and a flow rate of 8 m³/h. The uplift velocity during this process was maintained at 13.1m/h. The completion of all the columns necessitated around 26 hours. In addition to this, consideration was given to the operation of an electric mixer for the preparation of

the grout mixture, a high-pressure pump for the injection process, an air compressor, and, of course, the drilling unit.

A spoil output rate of 50% was assumed for the amount of soil that was treated.

Jet grouting double fluid LCA analysis

The findings of the life cycle assessment (LCA) analysis for the double fluid jet grouting case study are presented and discussed in Appendix 2.

The energy and flow diagram of this technology is conceptually equal to the JG-SF, just including, in this case, the air compressor.

As previously described, this variant of the JG technology exploits the contribution of the compressed air to ease and increase the mixing-up effect of the high-pressure injection of the same cement grout. As a result, wider columns are performed providing practically the same mechanical improvement of the soil, and finally reducing the number of drillings for obtaining the same jet grouted soil volume; as a result, a global reduction of the JG-DB work is obtained.

The following main conclusions can be drawn regarding the JG-DF technique (see also the comments included in Annex 2):

The details of numerical results give more sight into the detail:

1. the most relevant impact percentage comes from the grout preparation phase, now increased to 94,7%, few points more than the single fluid case;
2. the other working phase are negligible, and particularly the drilling effect drops clearly down;
3. thus, the JG-DF technology on one hand improves its global operative efficiency, but on the other it shifts the impact burden from the drilling phase to cement-based grout injected;
4. The most impacted category is largely confirmed to be the climate change, followed by the resource depletion

Jet Grouting Double fluid sensitivity analysis

The requirements/suggestions coming from the qualitative assessment with Envision (i.e. the main leverages to focus on) are:

- Energy: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation: Improving the rating of diesel transportation fueled trucks.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

To the aim of including these sustainability upgrades with respect to the original LCA baseline just described in detail, another sensitivity run of the LCA model has been performed with these modifications:

- Energy: use an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string.
- Cement: use Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string.
- Steel: use iron coming from scrap, through the Ecoinvent string.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string

The analysis provided, as pointed out mor above, is merely suggestive due to the inherent generality of the data sourced from the Ecoinvent database. Further enhancements can be made by utilizing customized Environmental Product Declarations (EPDs) or material-specific Life Cycle Assessments (LCAs) offered by suppliers. Nevertheless, the sensitivity calculation presented can offer an estimation of the potential

improvement in the sustainability performance of the technique, taking into account the recommendations derived from the Envision indicators.

The next table gives the raw characterization data for the sensitivity runs. In the double fluid technique, the sensitivity allows for a reduction in CO₂eq of about 17% with respect to the baseline case, a gain slightly lower than the results provided by the JG-SF sensitivity analysis.

Material/ Consumption	Quantity	Unit						
			Climate change	51,78%	317711,94034	384881,11064	kg CO ₂ eq	-17,45%
Cement	425000	kg	Ozone depletion	0,00%	0,01432	0,01649	kg CFC11 eq	-13,18%
Energy-Electricity	10998	kWh	Ionising radiation	0,00%	14234,40491	16427,32747	kBq U-235 eq	-13,35%
Energy-Diesel	1050	kWh	Photochemical ozone formation	4,33%	587,47960	727,82150	kg NMVOC eq	-19,28%
Steel	0	kg	Particulate matter	4,13%	0,00438	0,00525	disease inc.	-16,66%
T.A.M.	0	kg	Human toxicity, non-cancer	0,00%	0,00202	0,00243	CTUh	-17,18%
Sludge waste	283	m ³	Human toxicity, cancer	0,00%	0,00004	0,00004	CTUh	-17,39%
Water	425000	kg	Acidification	5,43%	776,69851	940,28271	mol H ⁺ eq	-17,40%
			Eutrophication, freshwater	5,57%	51,01587	56,42727	kg P eq	-9,59%
			Eutrophication, marine	0,00%	221,46489	272,64744	kg N eq	-18,77%
			Eutrophication, terrestrial	0,00%	2388,48662	2968,13777	mol N eq	-19,53%
			Ecotoxicity, freshwater	5,13%	1821227,77274	2211604,42657	CTUe	-17,65%
			Land use	0,00%	2401473,86489	2867315,42743	Pt	-16,25%
			Water use	0,00%	44459,07287	47202,39701	m ³ depriv.	-5,81%
			Resource use, fossils	11,85%	1477694,64211	1712391,06776	MJ	-13,71%
			Resource use, minerals and metals	0,00%	0,07216	0,08396	kg Sb eq	-14,06%

Tab. 9-4, Jet grouting with double fluid technique: sensitivity analysis vs. baseline, total impact indicators, characterization.

9.8 LCA analysis for ground improvement treatment using ground freezing with brine

Input data

The following two ground improvement case studies refer to a technology definitely different than the grout-based treatments described in the previous chapters: the artificial ground freezing (AGF) technique.

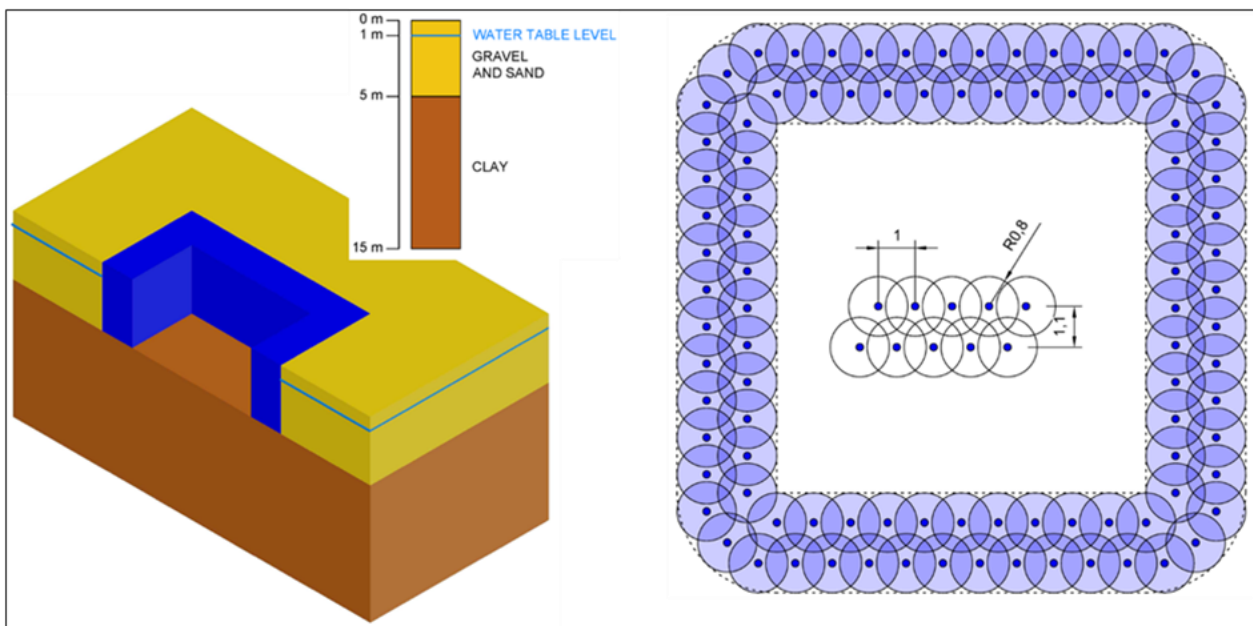


Fig. 9-8, Artificial ground freezing technique (AGF-BR and AGF-LN): geometrical data.

With this technique, the purpose is to provide a temporary mechanical and waterproofing improvement to the ground by freezing the water contained in the soil, below the water table level, just for the time needed to excavate the rest of the structure.

Artificial Ground Freezing (AGF) can be performing by resorting to the direct, called also open, method (with liquid nitrogen as a coolant - LN), or to the indirect, also called closed, method (cooling using the brine - BR). For both systems, thermometric detection points in the ground (i.e. thermometers placed surrounding the volume to be frozen) allow for the monitoring of the formation of the frozen structure up to achieving the required dimensions at the effective temperature. Mechanical properties of the frozen soil improve with low temperatures. The AGF treatment is implemented by placing 82 metallic freezing pipes in the ground, disposed on two rows per side, with an interaxis of 1,20 m between the pipes and 1,25 between the rows. The resulting ‘frozen wall’ has a thickness of 2.8m, which guarantees a total treated volume equal to 560m³.

We examine now the freezing produced with the closed method (AGF-BR): the targets of the treatment are to create a frozen soil wall having thickness of 2,4 m with a temperature of - 4°C at the border, operating with the brine at -35°C. This first stage stops when the target is reached. In the considered condition, the freezing is completed in 30 days. The second phase of the AGF-BR consists of the maintenance stage, during which the shaft excavation and the concrete plate and walls are cast. The freezing plant operates now by circulating brine at -28°C in order to keep the border of the efficient frozen soil wall at least at -4°C. A maintenance time of 30 days has been considered, taking into account the various activities of excavation and reinforced concrete cast of the pilot case examined pit. The equipment and overall system used for implementing ground freezing with brine appear to be significantly more complex if compared to earlier instances. However, as will be demonstrated shortly, the overall sustainability performance appears to be rather interesting.

Ground freezing with brine LCA analysis

The findings of the life cycle assessment (LCA) analysis for the closed system ground freezing case study are presented and discussed in Appendix 2.

The following diagram illustrates how the AGF with brine technology works in terms of its process flows.

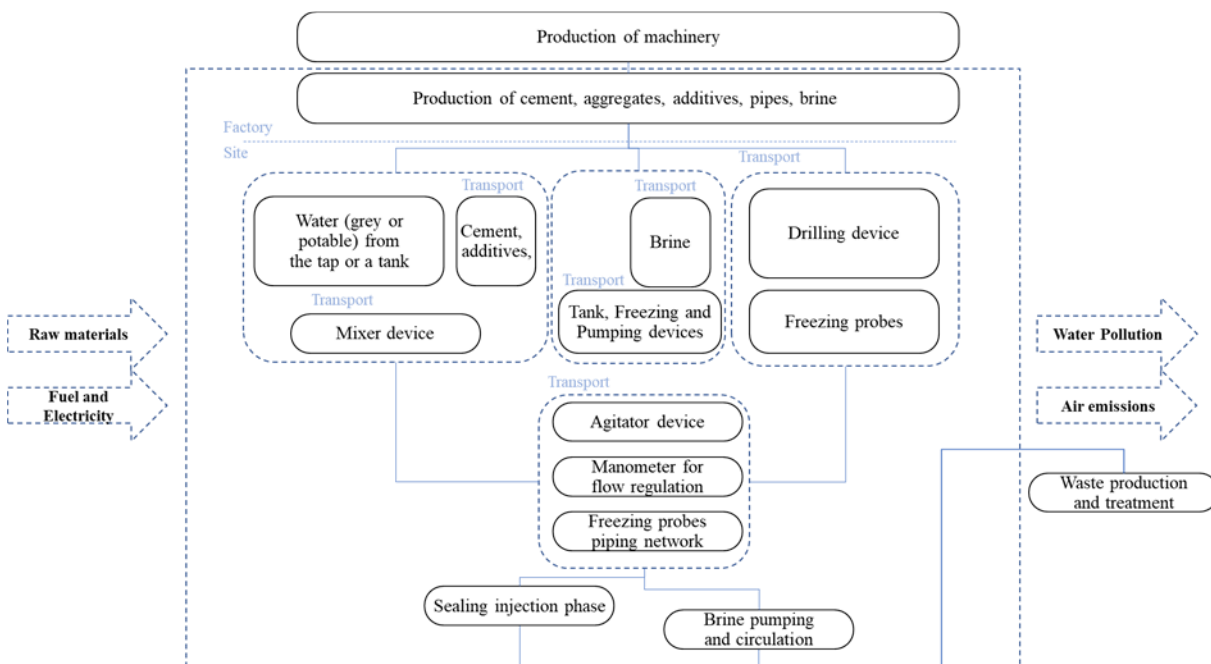


Fig. 9-9, Artificial ground freezing with brine technique: Process scheme for LCA Analysis.

The following main conclusions can be drawn about the AGF-BR technique (see also the comments in the Annex 2):

1. differently from “grouting” treatments seen in the previous cases, the impact of the process is shared between two main phases, that score together 97,3%;
2. the most impactful phase is the freezing one, that includes the functioning of the freezing plant, where the brine is chilled by the heater exchanger and the water-cooling tower; the activity keeps on during the initial freezing stage (creating the soli frozen wall), as well as during the excavation stage of the shaft, when the freezing plant, with lower energy absorption, keeps constant the frozen wall thickness. This phase scores 65,1%;
3. the other relevant impact source of the AGF-BR process is the “drilling” phase, that includes both the drilling of the holes for the metallic freezing probes as well as the provision of the latter and of the pipelines of the brine distribution circuit on site. This scores 32,2%;
4. the other working phase are negligible;
5. The most impacted category is the climate change followed not far from the resource depletion.

Brine freezing sensitivity analysis

The requirements/suggestions coming from the qualitative assessment with Envision (i.e. the main leverages to focus on) are:

- Energy: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation: Improving the rating of diesel transportation fueled trucks.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

To the aim of including these sustainability upgrades with respect to the original LCA baseline just described in detail, another sensitivity run of the LCA model has been performed with these modifications:

- Energy: use an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string.
- Cement: use Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string.
- Steel: use iron coming from scrap, through the Ecoinvent string.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string.

As for the previous cases, the analysis is only indicative, because of the ‘generic’ nature of the data coming from the Ecoinvent database, and more could be done using customized EPDs or material oriented LCAs provided by suppliers, still this sensitivity calculation can give a measure of how much the sustainability performance of the technique could be improved in the light of the suggestions coming from the Envision indicators.

Finally, the comparison between the baseline of the LCA analysis and the sensitivity put in evidence the relevant improvement achieved applying the sustainability countermeasures explained above: about 26% reduction impact for CO₂eq.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	2111	kg	Climate change	28,35%	33378,19348	45377,18315	kg CO ₂ eq	-26,44%
Energy-Electricity	78278,6	kWh	Ozone depletion	0,00%	0,00507	0,00685	kg CFC11 eq	-25,97%
Energy-Diesel	3240	kWh	Ionising radiation	0,00%	4048,45519	5918,79628	kBq U-235 eq	-31,60%
Steel	5830	kg	Photochemical ozone formation	0,00%	92,56538	122,45663	kg NMVOC eq	-24,41%

T.A.M.	0	kg	Particulate matter	4,60%	0,00094	0,00133	disease inc.	-29,61%
Bentonite	192	kg	Human toxicity, non-cancer	0,00%	0,00077	0,00206	CTUh	-62,60%
Brine waste	4915	kg	Human toxicity, cancer	0,00%	0,00003	0,00007	CTUh	-56,26%
Sludge waste	0	m ³	Acidification	5,88%	161,31599	221,86829	mol H ⁺ eq	-27,29%
Water	4094	0	Eutrophication, freshwater	5,17%	9,08107	12,98632	kg P eq	-30,07%
			Eutrophication, marine	0,00%	31,09725	41,12721	kg N eq	-24,39%
			Eutrophication, terrestrial	0,00%	333,16396	443,28549	mol N eq	-24,84%
			Ecotoxicity, freshwater	6,06%	412217,08182	567979,19438	CTUe	-27,42%
			Land use	0,00%	785600,01874	1073906,93792	Pt	-26,85%
			Water use	5,27%	21746,53226	31698,83098	m ³ depriv.	-31,40%
			Resource use, fossils	20,25%	484622,77241	667564,16608	MJ	-27,40%
			Resource use, minerals and metals	9,56%	0,24683	0,31618	kg Sb eq	-21,93%

Tab. 9-5, Artificial ground freezing with brine technique: sensitivity analysis vs. baseline, total impact indicators, characterization.

9.9 LCA analysis for ground improvement treatment using ground freezing with nitrogen

Input data

The last case study pertains to the utilization of artificial ground freezing (AGF) through the implementation of the 'direct technique'.

The present methodology employs Liquid Nitrogen (LN) as a coolant. Liquid nitrogen (LN) is transported to the site by tank trucks and is introduced into the circuit at a temperature of approximately -196°C . The system consists of insulated steel tubing and a manifold that facilitates the transfer of coolant to the freezing probes.

Regarding our case study, during the initial freezing stage, there is a significant flow of liquid nitrogen (LN) for a duration of around 8 days, for the frozen soil wall creation. The theoretical frozen efficient volume consumes 1,600 liters of LN per cubic meter. Then the system is switched to the maintenance stage for a duration of 30 days, coinciding with the excavation and execution of the construction. During this particular phase, nitrogen is introduced into the open circuit every two nights, owing to the notable efficiency of the LN AGF process.

It is important to note that, as a general rule, working on the freezing site during the circulation of liquid nitrogen is prohibited due to safety concerns. Specifically, a potential rupture in the circuit might result in the dispersion of nitrogen gas, which is denser than air and has the potential to rapidly deplete the oxygen content in the immediate work area. The nitrogen consumption rate for the maintenance stage is estimated to be 50 liters per cubic meter per day.

The equipment set needed for the AGF-LN technique, showed in the following figure, is simpler than the plant necessary for the AGF-BR technique. In facts, nitrogen is transported to the site by insulated, pressured tank trucks from which it is directly delivered in the open circuit. The exhausted gas is then released in atmosphere by the outlet chimney

Ground freezing with nitrogen LCA analysis

The findings of the life cycle assessment (LCA) analysis for the open system ground freezing case study are presented and discussed in Appendix 2.

The provided diagram illustrates the AGF-LN process scheme of the Life Cycle Assessment (LCA) model, showcasing the material and energy flows inside the building site and the defined limits, in addition to the functional unit.

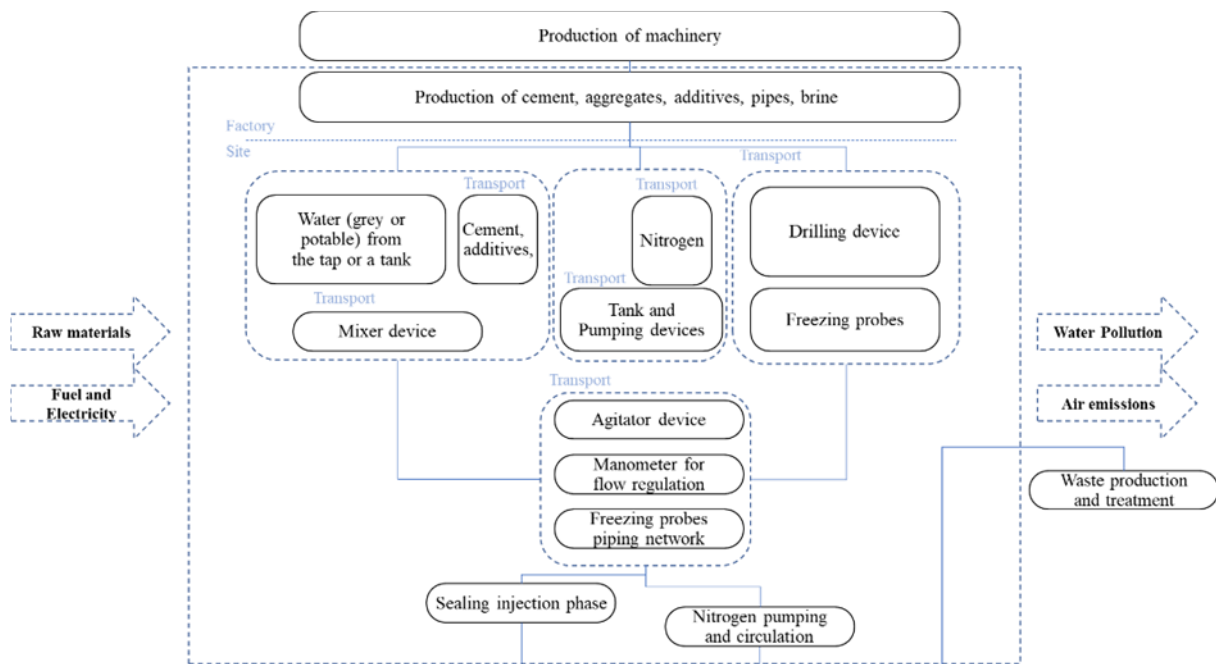


Fig. 9-10, Artificial ground freezing with nitrogen technique: LCA Process scheme.

The equipment requirement of the AGF-LN is lower than the freezing technique with brine. In fact, the open method coolant (LN) is provided on site in a condition that allows to pump directly to the circuit under the effect of the pressured condition of delivery on site, reducing the accessory machinery and relative energetic consumption. Moreover, the release of the gaseous nitrogen happens simply via a chimney exploiting the gas expansion effect.

The following main conclusions can be drawn about the AGF-LN technique (see also the comments in the Annex 2):

1. the freezing phase drops dramatically to a low level, as from the above written reasons. It has to be pointed out also how the material nitrogen seems to have two important properties:
 - a. the cryogenic energy emission, that is the powerful aspect of the process, takes places simply as change of state; the
 - b. the liquid nitrogen production comes out to provide a low impact.
2. The major impact is given by the “drilling” phase, as for the AGF-BR, that includes both the drilling of the holes for the metallic freezing probes as well as the provision of the latter and of the pipelines of the brine distribution circuit on site. This scores 91,4%
3. More generally the impact produced by the AGF-LN is lower than the previously presented cases, particularly jet grouting ones;
4. The other operational phases are practically very low, but the ”Sheath freezing probes” phase, i.e. the embedment of the freezing probes in the ground, reaches the 5,1%, due to the use of the cement as main component of the sheath grout. Cement reveals again its prominent impactful role.

Nitrogen freezing LCA sensitivity analysis

The recommendations derived from the qualitative evaluation conducted with Envision (i.e., the primary areas of emphasis) are as follows:

- Energy: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation: Improving the rating of diesel transportation fueled trucks.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

To the aim of including these sustainability upgrades with respect to the original LCA baseline just described in detail, another sensitivity run of the LCA model has been performed with these modifications:

- Energy: use an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string.
- Cement: use Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string.
- Steel: use iron coming from scrap, through the Ecoinvent string.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string.

The analysis presented here should be considered as indicative due to the inherent limitations of using generic data from the Ecoinvent database. Further improvements can be achieved by utilizing customized EPDs or conducting material-oriented Life Cycle Assessments (LCAs) provided by suppliers. Despite these limitations, the sensitivity calculation here performed provides a valuable insight into the potential enhancements in sustainability performance that could be achieved by incorporating the recommendations suggested by the Envision indicators.

The subsequent table presents the synthesis of the performance outcomes for both the baseline and sensitivity analyses. In the case of the AG-LN the improvement provided by the applying the sustainability countermeasures explained above is smoother than in the AGF-BR case and even than the jet grouting technologies, being comparable to the permeation grouting case: about 16% reduction impact for CO₂eq.

Material/ Consumption	Quantity	Unit	Impact category	Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	2111	kg	Climate change	18,91%	10061,02893	12081,53160	kg CO ₂ eq	-16,72%
Energy-Electricity	61,6	kWh	Ozone depletion	0,00%	0,00139	0,00165	kg CFC11 eq	-15,86%
Energy-Diesel	3240	kWh	Ionising radiation	0,00%	1323,91889	2020,55653	kBq U-235 eq	-34,48%
Steel	3001	kg	Photochemical ozone formation	0,00%	42,47470	50,96231	kg NMVOC eq	-16,65%
T.A.M.	0	kg	Particulate matter	6,24%	0,00057	0,00084	disease inc.	-31,59%
Bentonite	192	kg	Human toxicity, non-cancer	4,57%	0,00079	0,00229	CTUh	-65,58%
Nitrogen	1778,1	kg	Human toxicity, cancer	0,00%	0,00003	0,00008	CTUh	-58,58%
Nitrogen waste	1778,1	kg	Acidification	0,00%	46,15744	57,45410	mol H ⁺ eq	-19,66%
Brine waste	0	kg	Eutrophication, freshwater	0,00%	3,14901	4,46386	kg P eq	-29,46%
Sludge waste	0	m ³	Eutrophication, marine	0,00%	13,52445	16,08678	kg N eq	-15,93%
Water	4094	kg	Eutrophication, terrestrial	0,00%	139,29496	167,50348	mol N eq	-16,84%
			Ecotoxicity, freshwater	0,00%	117535,74884	145972,33367	CTUe	-19,48%
			Land use	0,00%	284353,19957	322307,70154	Pt	-11,78%
			Water use	0,00%	4019,49973	5710,29778	m ³ depriv.	-29,61%
			Resource use, fossils	12,95%	140064,39123	175307,43707	MJ	-20,10%
			Resource use, minerals and metals	30,36%	0,35424	0,42718	kg Sb eq	-17,07%

Tab. 9-6, Artificial ground freezing with nitrogen technique: sensitivity analysis vs. baseline, total impact indicators, characterization.

9.10 The results for the second phase of the method

The following graphs shows the LCA results distinguishing the five treatments processes.

The normalization step chart shows how JG technologies and AGF technologies differently act on the various impact categories.



Fig. 9-11, Case studies techniques comparison: impact, characterization view.

The normalization step put in evidence how the JG processes (where the effect of the material cement is predominant) dominate the impact for the climate change. This is typical for the concrete industry. On the right side of the diagram, the effect of the JG techniques on the depletion of fossils resources as well as the AGF techniques, that use brine and liquid nitrogen as cooler fluid, on minerals resources depletion.

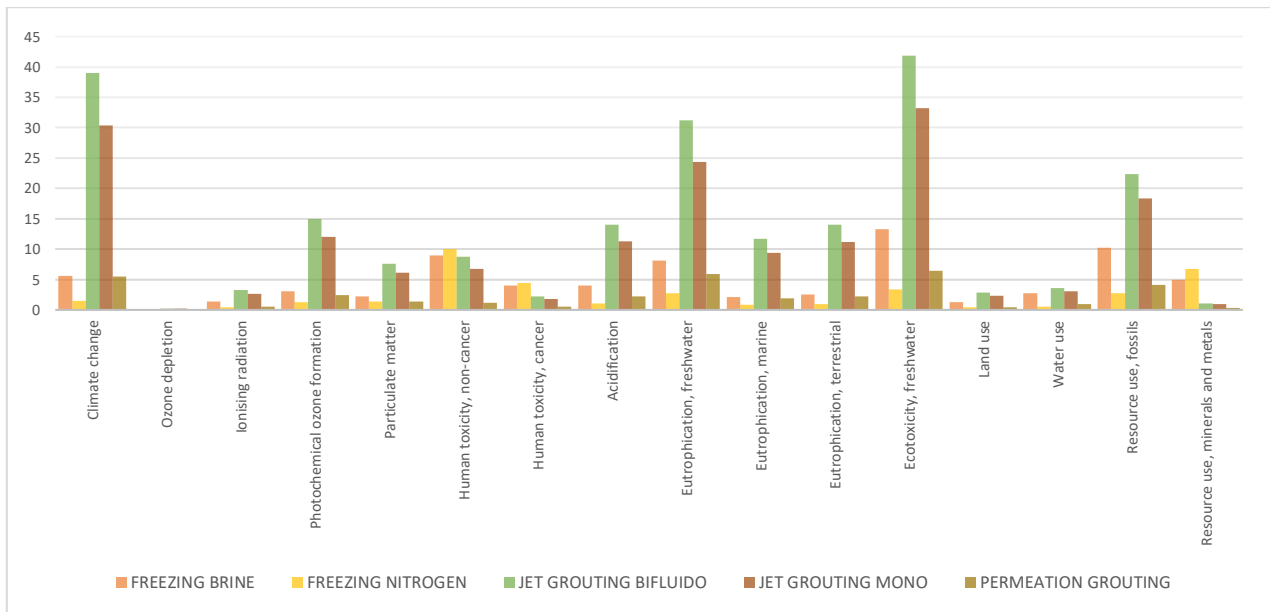


Fig. 9-12, Case studies techniques comparison: impact, normalized view.

The following chart shows the results of the weighted step. The impactful role of the jet grouting (green bars of JG-DF and red bars for JG-SF) on the climate change is highly evident. Permeation grouting and AGF-BR brine follow with about an order of magnitude less.

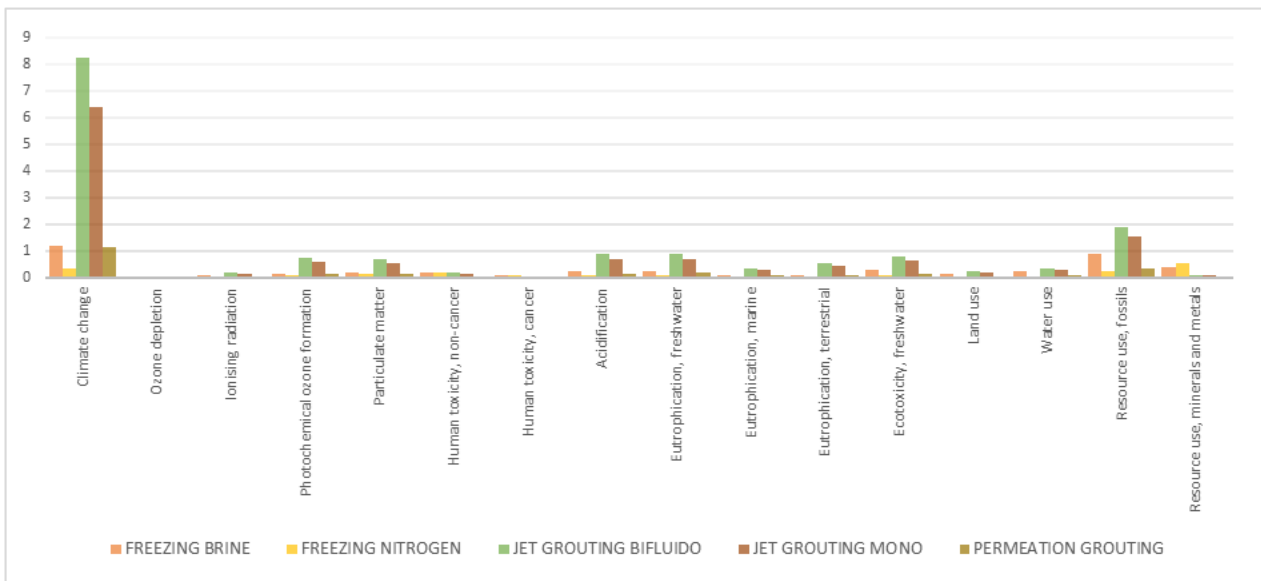


Fig. 9-13, Case studies techniques comparison: impact, weighted view.

For a better comprehension of this result, it is useful to observe the plot of the impacts for the JG-SF case, distinguishing the 4 main sub-processes. The grout mix preparation is largely the most relevant, impacting primarily on the climate change category.

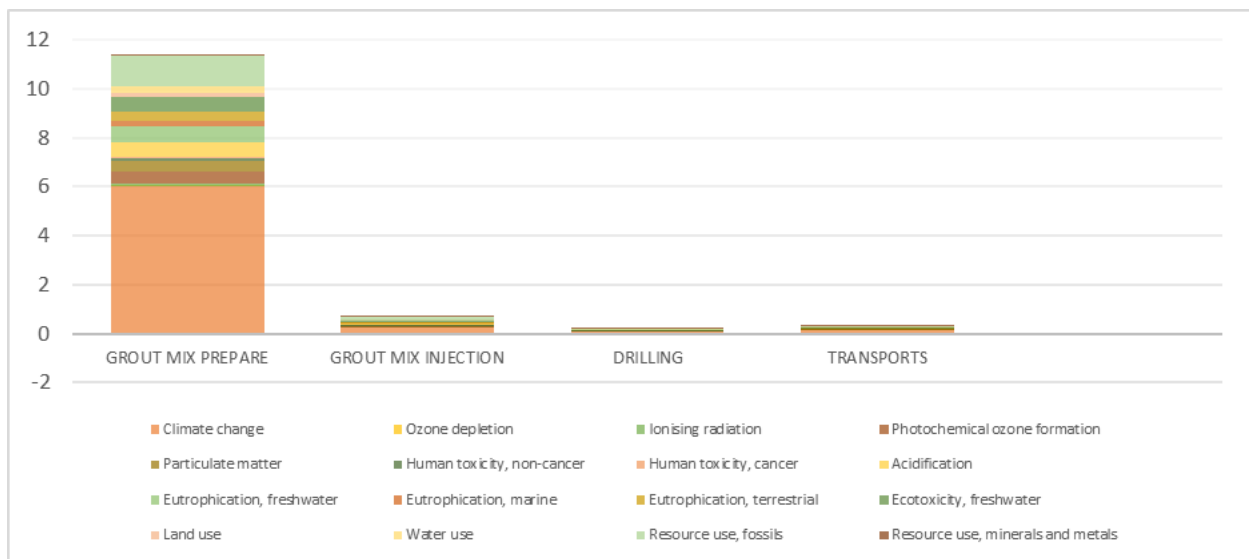


Fig. 9-14, Jet Grouting with single fluid technique: impact, single point/score view.

The LCA method allows for a representation of the impact burdens provided by the main material and machinery involved in the grout-mixing subprocess: the following diagram shows the major role of the cement, that reverberates on the entire jet grouting process.

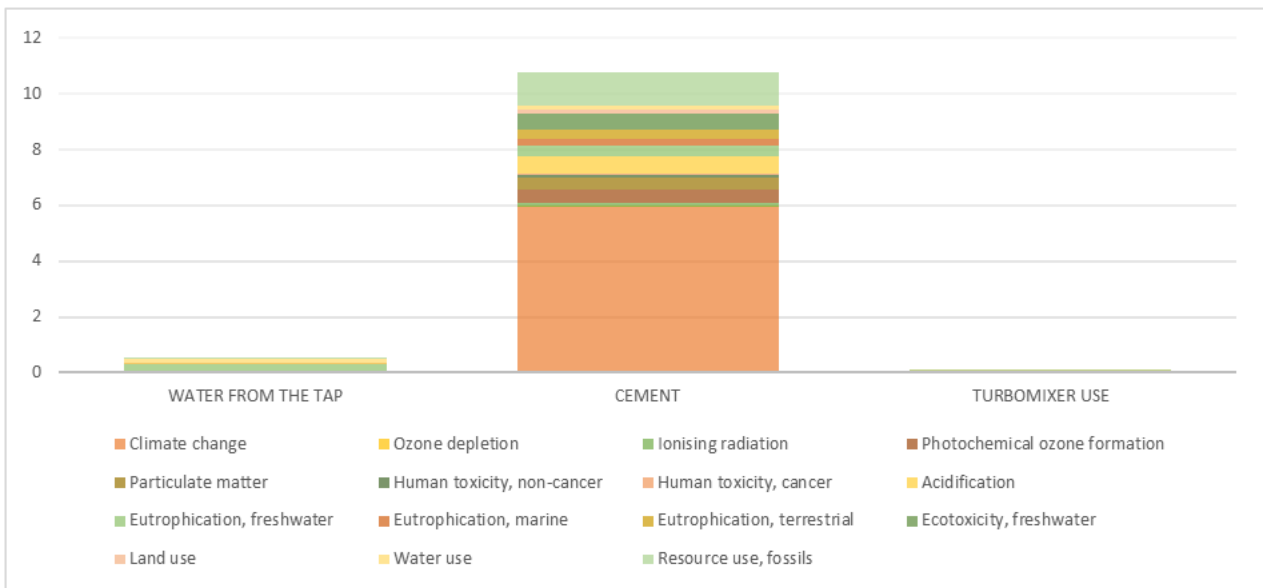


Fig. 9-15, Jet grouting with single fluid technique: grout mix preparation focus, impact, single score view.

The same type of chart for the grout-mix preparation of permeation grouting reveals the similar impacting effect of the cement, with a definitely lower magnitude. This makes sense because of the different quantity of cement used for the two different techniques.



Fig. 9-16, Permeation Grouting technique: impacts, single point view.

It is however interesting to focus on the nature of the two processes.

The jet grouting requires energy in order to break-up the soil and mixing it the cement grout, providing for a very consistent result: the strong improvement of the mechanical (and hydraulic) properties of the jet grouted soil. As a matter of fact, the breaking-up fluid (i.e. the cement grout) is the one of the major actors of this

process, together with the high-pressure level of the injection (Tornaghi et al. 2004), provided by the machinery: the bigger is the quantity of grout mix injected, the higher is the energy acting to modify the soil conditions. The LCA analysis returns a framework consistent with the described task.

The permeation grouting operates on the soil in very “smoothly” way, practically without modifying the ground fabric. The low pressure of the injection allows for the grout to exactly permeate the voids between the grains. If we apply to PG the same “energetic” concept used for designing the jet grouting treatment, it comes out that this technique requires a very lower rate of energy, being mainly the injection pump the principal player of this process. Again, the LCA analysis grasps this aspect.

For AGF with brine, the more impactful sub-process is the freezing activity, for about 2/3 of the total impact, and the drilling stage that includes the metallic probes provision.

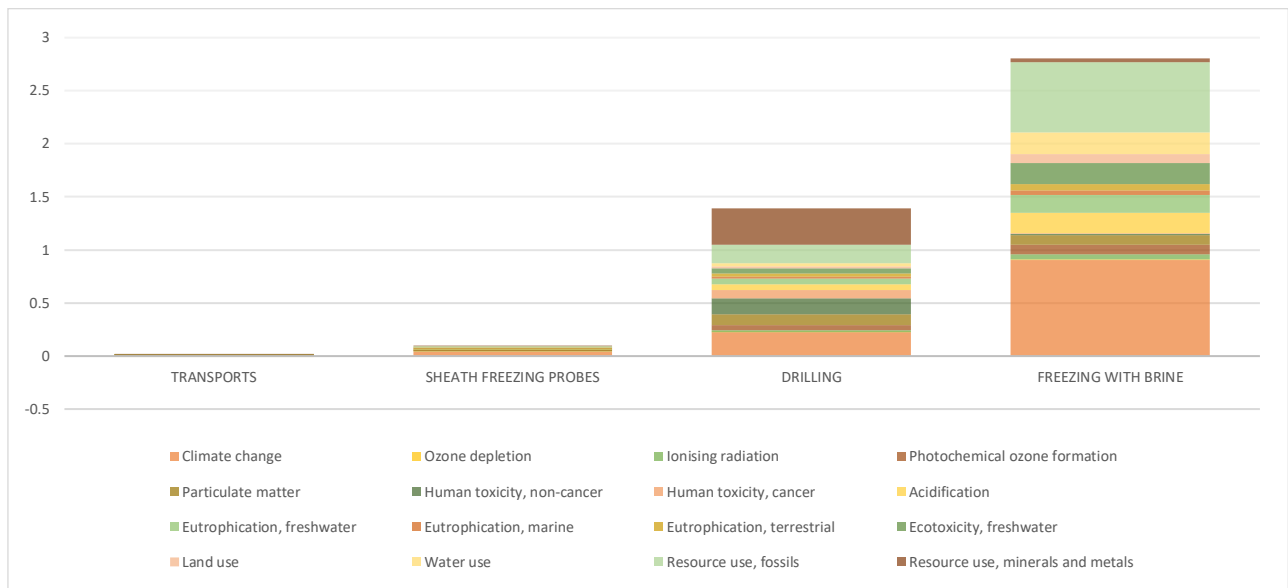


Fig. 9-17, Artificial ground freezing with brine technique: impact, single score view.

For AGF with liquid nitrogen, the impact burden is shifted almost totally to the “drilling-and-probes” stage.

In effect, the AGF-BR operates by the flowing of the brine (the main actor of the treatment) into a circuit, requiring a continuous functioning of the freezing plant for chilling the fluid that exchanges energy with the soil. The AGF-LN operates as an open circuit, in which the nitrogen (here the main actor of the process) starts to flow as a fluid, and, at the end, is released as a gas. The nitrogen is “pumped” thanks to the 2-3 bars pressure present in the tank upstream of the circuit; we can affirm that the energy necessary for the production of the nitrogen at the liquid state is released in the ground by freezing it, because of the very low temperature of the change of state of the fluid. The industrial process of LN production is globally less impactful than the other sources of energy used in the other 4 treatment techniques. LCA analysis provides also in this case a consistent result.

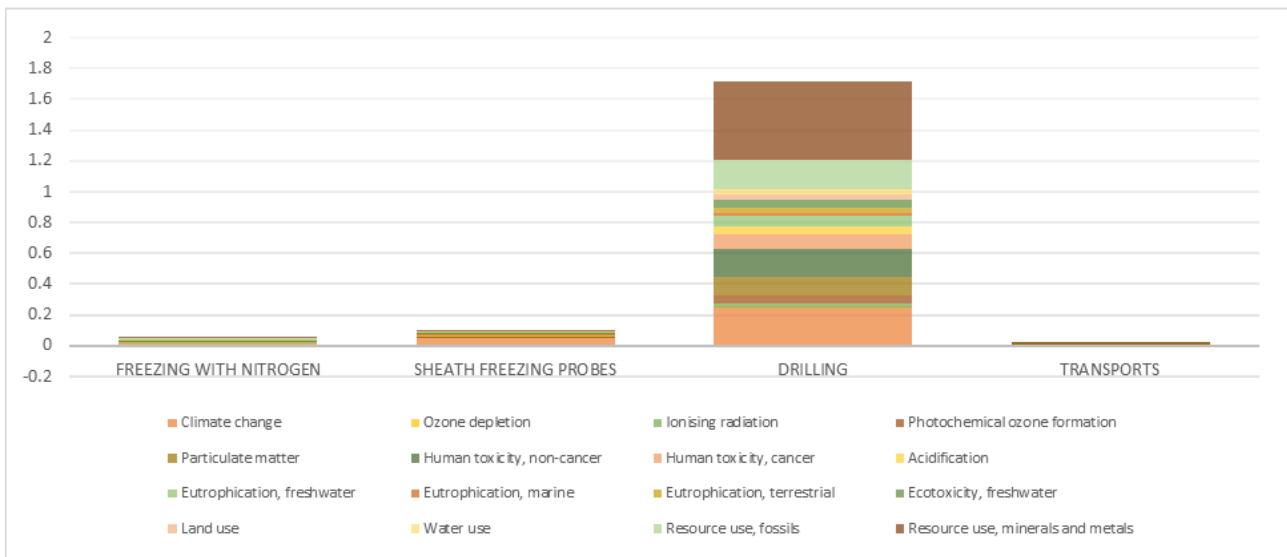


Fig. 9-18, Artificial ground freezing with nitrogen technique: impact, single point view.

If we compare the two “families” of treatment type, grouting and freezing, we can observe that under the environmental aspect freezing is more sustainable; its weakness lies in being a sort of an “alive” process, useful for temporary operations. On the contrary the grouting provides a permanent result, and particularly the jet grouting results to be very effective under the mechanical point of view. Those conclusions are pertinent for the “cradle-to-gate” analysis performed with the three phased method; an extension “beyond the gate” of the assessment, may provide, case to case basis, different results, depending also from the wider context for which the soil treatment has been performed.

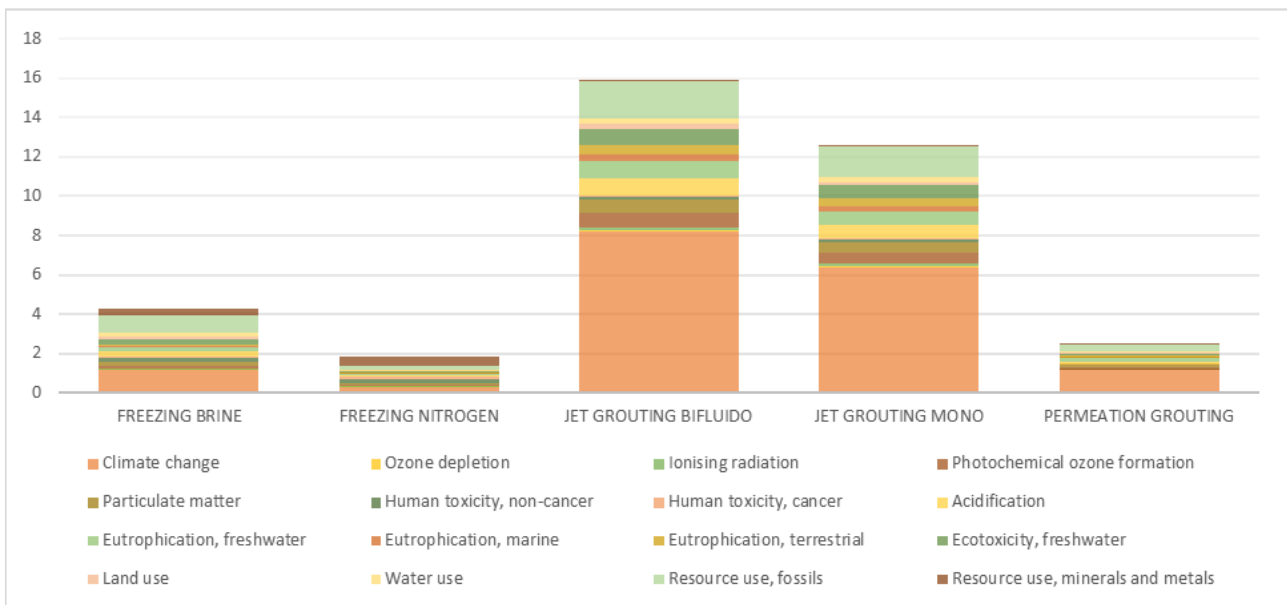


Fig. 9-19- Case studies techniques comparison: impact, single point/score view.

The following table allows for the comparison between the different techniques: the heat map highlights (in red) the highest values for the quantitative KPIs of each impact category and confirms the above evaluations.

Impact category	Unit	PERMEATION GROUTING	JET GROUTING SINGLE FLUID	JET GROUTING DOUBLE FLUID	FREEZING BRINE	FREEZING NITROGEN
Climate change	kg CO2 eq	44162,18116	246215,44830	316196,39990	45377,18269	12081,53161
Ozone depletion	kg CFC11 eq	0,00279	0,01183	0,01422	0,00685	0,00165
Ionising radiation	kBq U-235 eq	2115,31387	11200,80211	13923,23464	5918,79626	2020,55654
Photochemical ozone formation	kg NMVOC eq	100,18710	488,39035	608,09381	122,45663	50,96231
Particulate matter	disease inc.	0,00080	0,00364	0,00452	0,00133	0,00084
Human toxicity, non-cancer	CTUh	0,00027	0,00155	0,00201	0,00206	0,00229
Human toxicity, cancer	CTUh	0,00001	0,00003	0,00004	0,00007	0,00008
Acidification	mol H+ eq	122,69145	627,28454	781,53838	221,86829	57,45410
Eutrophication, freshwater	kg P eq	9,42141	39,20071	50,10546	12,98632	4,46386
Eutrophication, marine	kg N eq	37,41535	182,96914	229,02614	41,12721	16,08678
Eutrophication, terrestrial	mol N eq	393,50655	1976,13326	2471,45650	443,28549	167,50348
Ecotoxicity, freshwater	CTUe	273202,00878	1417097,26782	1786505,06989	567979,18605	145972,33367
Land use	Pt	323969,19188	1864116,81548	2318539,97682	1073906,92763	322307,70222
Water use	m3 depriv.	11477,57963	35047,85458	41721,04968	31698,83055	5710,29780
Resource use, fossils	MJ	264587,27406	1189666,35757	1452697,14610	667564,16087	175307,43694
Resource use, minerals and metals	kg Sb eq	0,02053	0,05804	0,06998	0,31618	0,42718
Climate change - Fossil	kg CO2 eq	44070,27949	245697,90639	315550,19110	45124,85995	12045,89053
Climate change - Biogenic	kg CO2 eq	60,92449	337,16252	413,95098	209,80594	23,22929
Climate change - Land use and LU change	kg CO2 eq	30,97718	180,37939	232,25781	42,51680	12,41178

Tab. 9-7, Case studies techniques comparison: impact, characterization values.

Finally, the previous discussion on the impact assessment analysis results shows how the proposed methodology based on the LCA, results to be consistent, focusing correctly on the environmental assessment coherently with the physic phenomena that govern the soil treatment process.

10 The third phase of the assessment method: the framework scoring refinement

With the quantitative data developed in the previous chapter, the third step of the proposed three-phased method can be performed. The score evaluation of each sustainability indicator (within the framework Envision/DNSH) is assessed and discussed. The aim this closing phase is to put these contributions together and review the Envision framework results.

The refinement assessment is included in Annex 3⁶.

Following the previous discussions on the relationship between the Envision indicators and the DNSH criteria requirements, it has been created a conceptual framework for ground improvement techniques that provides a correspondence between the indicators and the requirements. Based on this approach, we associated the rating score proposed by Envision to the DNSH requirements. This provides a ‘quantitative’ and ‘numerical’ evaluation of the DNSH requirements.

In the third phase of the proposed method, each credit of Envision are reviewed in the light of the LCA results, considering the sensitivity analysis carried out.

The following aspects has to be took into account:

- the starting Envision/DNSH assessment, in the 1st phase of the methodology, has been carried out by moving from general point of view, more related to the entire infrastructure assessment, as it often takes place at that size of evaluation and even of necessity. The LCA analysis went definitely deeper into the details of the ground improvement technology, with a more specialized expertise: nevertheless, the inventory of the LCA remained generalist, due to the actual unavailability of the proper detail level about the products that are part of the supply chain of the specific treatment, that could be provided by the environmental product declarations, the EPDs, still weakly diffused. Taking into account also the particular nature of the ground improvement technique, in which materials and processes are often practically set after dedicated tests or trial filed, it comes out the necessity of tailored EPD for each task. EPD issue will be better faced in further chapters;
- the refinement phase may provide also downgrade from the first phase assessment, due to the LCA deepening; the above-described issues may be just one the reason of this result;
- in any case, for achieving a complete evaluation of a soil treatment work, the three-phased method evaluation should be made in conjunction with a complete cost analysis: this because of the peculiarity of technological nature of these processes, that may have relevant weight under both costs as well as overall infrastructural conception aspects.

The next paragraphs contain, for each of the five techniques, a quick description of the credits which score has been varied on the basis of the LCA-based second step, together with a table that summarizes and compares the numerical results obtained after the refinement.

In order to provide a synthetic view, the Envision indicators have been grouped following the five main categories. As mentioned above, the maximum scoring achievable for Envision is equal to 232, and the corresponding maximum achievable with DNSH is 348.

⁶ The assessment is taken from the PhD thesis of the co-authors of this research (Stefano Susani), who is a certified Envision SP professional. See also note 2

10.1 Permeation grouting assessment refinement

The results of the LCA baseline and sensitivity runs are summarized in the table in Appendix 1, together with the major material and energy flows.

This is the assessment of the evaluations of phase one.

- **CRI.1 Reduce Net Embodied Carbon (estimated 75%).**
 - The requirement here is that the project team demonstrates at least a 30% reduction in total embodied carbon of materials over the life of the project compared to the baseline. In this case, again, cement and aggregates are the leverages. One more possibility comes from the TAM that could come from recycled plastics. Provided that these options are implemented, the score can be confirmed, nevertheless the assessment performed considering cement with less clinker, energy coming from renewable sources shows a benefit of no more than 16% in CO₂eq reduction. For this reason, the score is downgraded to 10 (50%). More could be done with deeper/better information about the real case.
- **CRI.2 Reduce Greenhouse Gas Emissions (estimated 69%).**
 - To reach the score, the project team must demonstrate at least a 25% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The LCA calculation could provide this information because of the use of green cements and aggregates. The impact of cement on climate change using ‘green’ cement should be reduced significantly, still the quantification of this reduction is difficult to do. This team is carrying on further analyses in order to catch the needed information from EPD declaration of cement and concrete producers. This means that, to date, the project does not allow for such a reduction and the score needs to be reduced. To the same conclusion comes the assessment evaluation mentioned before, that points to 16% CO₂eq reduction. Scaling back one step means that this goes to 8 and the percentage to 31%.

As a conclusion of this assessment conducted after the LCA analysis, only two scores had to be revised (CR.1.2 and CR.1.2)) and the overall scoring goes to 94/232 (41%), that still ranges high (gold rating).

The following table summarizes and compares the results obtained after the refinement of the permeation grouting assessment.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Permeation grouting		Scored EU environmental targets Permeation Grouting					
					Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	2	10%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	54	61%	39	0	3	28	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0
Envision	232	43	94	41%						
DNSH	348	68	151	43%	60	0	5	44	25	17

Tab. 10-1, Permeation grouting technique: Envision vs. DNSH revised ratings.

On the basis of the maximum scoring achievable for Envision (232 points), and the corresponding achievable with DNSH (348 points), the refined performance of the permeation grouting technique is 41% for Envision and 43% for DNSH. This assessment rating, according to the Envision protocol, is considered as positive and awarded with a “gold” rating.

10.2 Single fluid jet grouting assessment refinement

The following indicator evaluations are reported.

- **CRI.2 Reduce Greenhouse Gas Emissions (estimated 50%).**
 - To reach the score, the project team must demonstrate at least a 25% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The LCA calculation could provide this information because of the use of green cements and aggregates. The impact of cement on climate change using ‘green’ cement should be reduced significantly, still the quantification of this reduction is difficult to do. This team is carrying on further analyses in order to catch the needed information from EPD declaration of cement and concrete producers. The sensitivity already presented for this case and synthesized in the previous table gives a reduction of about 18% in CO₂eq, starting from the baseline. Scaling back one step means that this goes to 8 and the percentage to 31%.

The following table shows the matching between the Envision scoring and the DNSH criteria. It is interesting to notice that OBJ 1 (related to materials and cement use) and OBJ 3 (related to recycling and waste reuse potential) allow better ratings for this specific technology heavily based on cement and energy use.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Single fluid Jet Grouting		Scored EU environmental targets Permeation Grouting					
					Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	2	10%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	45	51%	32	0	1	25	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0
Envision	232	43	85	37%	53	0	3	41	25	17
DNSH	348	68	139	40%						

Tab. 10-2, Single fluid jet grouting technique: Envision vs. DNSH revised ratings.

On the basis of the maximum scoring achievable for Envision (232 points), and the corresponding achievable with DNSH (348 points), the refined performance of the permeation grouting technique is 37% for Envision and 40% for DNSH. This assessment scoring, according to the Envision protocol, is considered as acceptable and awarded with a “silver” rating.

10.3 Double fluid jet grouting assessment refinement

This technique is similar to the previous one but aims to reducing construction time and schedule by using a more powerful injection devices and larger material quantities. These characteristics are directly reflected in the LCA analysis performance and in the Envision ratings. In the following, we analyze each of the relevant Envision indicators listed in phase one.

The following indicator evaluations are reported.

- **CRI.1 Reduce Net Embodied Carbon (25%).**
 - The ambition about this target has been realistically set to 5% reduction. This makes sense considering that the amount of CO₂eq is far larger than the other cases (316 ton CO₂eq, compared to 246 tons CO₂eq for the single fluid technique and 44 tons CO₂eq for permeation grouting). In this case, again, cement and aggregates are the leverages. To this aim the sensitivity has been performed and because of the heavy involvement of cement with reduced content of clinker and electricity coming from renewable sources, the reduction of CO₂eq with respect to the baseline is around 17%. The score can be increased to 8 (31%).

The following table shows the matching between the Envision scoring and the DNSH criteria. As for the previous case, it is interesting to notice that OBJ 1 (related to materials and cement use) and OBJ 3 (related to recycling and waste reuse potential) allow better ratings for this specific technology heavily based on cement and energy use.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Double fluid Jet Grouting		Scored EU environmental targets Permeation Grouting					
			Score	%	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	2	10%	0	0	0	0	0	0
Leadership	32	8	10	31%	0	0	0	3	3	0
Resource Allocation	88	18	39	44%	26	0	1	22	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0
Envision	232	43	76	33%	47	0	3	35	22	17
DNSH	348	68	124	36%						

Tab. 10-3, Double fluid jet grouting technique: Envision vs DNSH revised ratings.

On the basis of the maximum scoring achievable for Envision (232 points), and the corresponding achievable with DNSH (348 points), the refined performance of the permeation grouting technique is 33% for Envision and 36% for DNSH. This assessment scoring, according to the Envision protocol, is considered as acceptable and awarded with a “silver” rating.

10.4 Brine ground freezing assessment refinement

The previous three techniques had the ‘grouting’ approach in common: ground improvement was reached through the injection of a concrete matrix within the existing soil, in one case strengthening the existing and in the other two just displacing the existing soil.

The next two treatments act in a very different way. Through a network of pipes, the existing soil (immersed in the water table) is frozen, and its mechanical properties increased temporary, as long as freezing lasts. We can distinguish between the first freezing phase (that requires more energy) and the second freezing phase (that keeps the freezing state going). As a first technique, the use of brine as freezing liquid is presented.

As can be seen at a glance from the table below, material is mainly brine and steel and power play a major role in this technique. The table also shows the outcomes and the comparison from the LCA analyses performed (baseline and sensitivity).

The following indicator evaluations are reported.

- **CRI.2 Reduce Greenhouse Gas Emissions (69%).**
 - To reach the score, the project team must demonstrate at least a 50% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. As per the previous indicator, the level of CO₂eq is reduced of about 26% with respect to the baseline, for this reason the target cannot be reached. The score is downgraded to 13, 50% of the maximum achievable.

Compared to the other techniques, the picture of ground freezing apparently looks similar, but the blend of the different contributions is decidedly different: materials are less involved, while the impact is provided mainly by energy consumption and nature.

The overall score achieved is better for both Envision and DNSH with respect to the grouting techniques.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Brine Ground Freezing		Scored EU environmental targets Permeation Grouting					
			Score	%	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	5	25%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	56	64%	42	0	5	28	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	30	47%	28	0	0	15	2	0
Envision	232	43	109	47%	73	0	7	49	25	17
DNSH	348	68	171	49%						

Tab. 10-4, Ground freezing with brine technique: Envision vs. DNSH revised ratings.

On the basis of the maximum scoring achievable for Envision (232 points), and the corresponding achievable with DNSH (348 points), the refined performance of the permeation grouting technique is 47% for Envision and 49% for DNSH. This assessment rating, according to the Envision protocol, is considered as positive and awarded with a “gold” rating.

10.5 Nitrogen freezing ground assessment refinement

The nitrogen based freezing treatment is very similar to the brine type, with the exception for the fluid used that is liquid nitrogen (delivered already liquefied at the site). We can distinguish between the first freezing phase (that requires more energy) and the second freezing phase (that keeps the freezing state going). As a first technique, the use of brine as freezing liquid is presented.

As can be seen at a glance from the table below, material is mainly nitrogen and steel and power plays a minor role in this technique, with respect to the previous one. The table gives an overview of the differences between the baseline and the sensitivity LCA analyses performed. The main energy and material flows are given.

The following indicator evaluations are reported.

- **RA2.2 Reduce Construction Energy Consumption (100%).**
 - To reach the target of requiring/implementing at least 4 energy reduction strategies, these are the design choices that can be made: chose steel coming from a green supply chain, use truck

EURO6 or more, use machinery for mixing powered by electricity. These strategies have been implemented in the sensitivity analyses. The score is confirmed.

- **CRI.1 Reduce Net Embodied Carbon (75%).**
 - The requirement here is that the project team demonstrates at least a 30% reduction in total embodied carbon of materials over the life of the project compared to the baseline. In this case, again, cement and aggregates are the leverages. Still, due to the nature of the technique, the main focus is energy and energy use. The sensitivity performed allows for no more than 16% CO₂eq reduction with respect to the baseline (including the use of iron coming from scrap). Therefore, the score has to be downgraded to 10 (50%).
- **CRI.2 Reduce Greenhouse Gas Emissions (69%).**
 - To reach the score, the project team must demonstrate at least a 50% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The LCA assessment provides an improvement of about 16% in kg CO₂eq with respect to the baseline. This means that, to date, the project does not allow for such a reduction and the score needs to be reduced. Scaling back one step means that this goes to 8 and the percentage to 31%.

Compared to the other techniques, the picture of ground freezing apparently looks similar, but the blend of the different contributions is decidedly different: materials are less involved, while the impact is provided mainly by energy consumption and kind.

The overall score achieved is better for both Envision and DNSH with respect to the grouting techniques.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Nitrogen Ground Freezing		Scored EU environmental targets Permeation Grouting					
			Score	Percentage	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	5	25%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	58	66%	37	0	3	28	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0
Envision	232	43	101	44%	58	0	5	44	25	17
DNSH	348	68	149	43%						

Tab. 10-5, Ground freezing with nitrogen technique: Envision vs DNSH revised ratings.

On the basis of the maximum scoring achievable for Envision (232 points), and the corresponding achievable with DNSH (348 points), the refined performance of the permeation grouting technique is 44% for Envision and 43% for DNSH. This assessment rating, according to the Envision protocol, is considered as positive and awarded with a “gold” rating.

10.6 Final view of the sustainability performance following Envision and DNSH

The table hereafter includes the final evaluation with the Envision/DNSH framework, based on the LCA baseline and sensitivity runs. Each score has been validated through the quantitative data provided by the LCA analyses results. ~~The final scores change as described in the previous chapter.~~

	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Permeation grouting		Score Single fluid Jet Grouting		Score Double fluid Jet Grouting		Score Brine Ground Freezing		Score Nitrogen Ground Freezing	
QL1.4	12	1	1	8%	1	8%	1	8%	3	25%	3	25%
QL1.6	8	1	1	13%	1	13%	1	13%	2	25%	2	25%
LD1.4	18	3	6	33%	6	33%	3	17%	6	33%	6	33%
LD3.3	14	5	7	50%	7	50%	7	50%	7	50%	7	50%
RA1.1	12	3	12	100%	12	100%	12	100%	12	100%	12	100%
RA1.2	16	4	9	56%	9	56%	6	38%	6	38%	6	38%
RA1.4	16	4	7	44%	4	25%	4	25%	10	63%	10	63%
RA2.2	12	1	8	67%	4	33%	1	8%	8	67%	12	100%
RA2.3	24	5	15	63%	15	63%	15	63%	15	63%	15	63%
RA3.3	8	1	3	38%	1	13%	1	13%	5	63%	3	38%
NW2.4	20	2	2	10%	2	10%	2	10%	2	10%	2	10%
NW3.5	8	3	3	38%	3	38%	3	38%	3	38%	3	38%
CR1.1	20	5	10	50%	10	50%	10	50%	15	75%	10	50%
CR1.2	26	3	8	31%	8	31%	8	31%	13	50%	8	31%
CR1.3	18	2	2	11%	2	11%	2	11%	2	11%	2	11%
Envision	232	43	94	41%	85	37%	76	33%	109	47%	101	44%
DNSH	348	68	151	43%	139	40%	124	36%	171	49%	149	43%

Tab. 10-6, Case studies comparison, impact, characterization values.

The final scoring provides a rating that awards again the freezing technologies (AGF) and the permeation grouting (PG). The more significant credits in differentiating the technologies result to be more related to the environmental aspects: energy consumption (RA2.2), reduction of construction waste (RA1.4) and the emissions of embodied carbon (CR1.1) and greenhouse gas (CR1.2). Freezing works provide minor impact in term of noise and vibration, credit QL1.4, and of construction impact, credit QL1.6 (having both an immediate social fallout) due to the nature of the core-stage of the treatment: the circulation of fluid into a fixed circuit with a low, regular flow rate, that very rarely require machine and equipment shifting in favor of a safer and stable working site arrangement.

The scores can be correlated to the drawn provided by the LCA analysis:

- the great use of the cement impacts more or less on all the examined credits, contributing particularly to the “silver” rating gained by the jet grouting technology; others reach “golden” level;
- ground freezing and permeation grouting techniques exploit the existing soil fabric structure, in the sense that they act on it by filling its voids or freezing the water inside the latter; this leads to less energy consumption and less emissions if compared to the jet grouting, that mixes the soil;
- permeation grouting and freezing with brine are somehow the more “traditional” technologies among the ones examined, but they seem to have interesting room of improvement related for example respectively to the use of recycled materials (for the TAMs), and to the use of renewable energies for the coolant circulation;
- jet grouting, due to the massive cement use, is the technologies that appear to be more linked to a major industry process (cement production) and to its results in terms of environmental impact.

The three-steps method provides a consistent drawn of the impacts that each technology produces, putting in evidence the hotspots and weakness points of each of them.

The results must then be integrated into a wider framework, that considers the sustainability of the infrastructure in its variety and complexity, evaluating, beyond the “site” stage so far examined, the optimal technology to be adopted case to case basis.

Referring to the pilot case, the jet grouting treatment provides the soil for a long term statical and hydraulic improvement, that could be taken into account in the framework of the whole project for example by executing a lighter lining solution (in terms of walls dimension and watertightness system) with an efficient performance for several decades of the structure’s life. Under this view, the total impact of the treatment could be lower than a structurally stronger and more complex solution built under the protection of a soil freezing treatment.

Also a different excavation geometry (for example, a circular-shaped pit) could involve different statical behavior of the treated soil, with different optimal thickness of the latter, thus leading to a different impact of the examined technologies.

In many cases other constraint may give a different light under which the sustainability of similar technologies has to assessed: for instance, an urban context, or the vicinity to ancient structures as well as to other existing structures (dams, tunnels), deposits, or other possible interferences.

The results of the simple pilot-case that has been studied appeared to be consistent for a validation of the proposed method, but they are not to be assumed as a “sustainability rating” of the considered technologies. Instead, the method has a big flexibility because its results can be implemented in different scenarios that can be assessed by the Envision protocol, eventually with the immediate possibility of a specific verification of the DNSH criteria in the UE context.

11 Quantitative cost assessment through life cycle cost analysis

11.1 The cost perspective: Cradle to site LCCA of the case studies

An economic evaluation has been conducted on the five approaches, utilizing current market pricing in 2022 and considering the flow/materials outlined in the preceding chapters and employed in the life cycle evaluations.

Description	Unit	Cost	Permeaton grouting		Jet grouting mono fluid		Jet grouting double fluid		Freezing indirect system (Brine)		Freezing direct system (LN)	
			QT	Amount	QT	Amount	QT	Amount	QT	Amount	QT	Amount
TOTAL VALUE				122.265,60 €		223.139,76 €		281.276,00 €		604.752,44 €		586.500,00 €
Site preparation	forfait	1		35.000,00 €		45.000,00 €		48.000,00 €		200.000,00 €		
Steel pipes connection	m	100,00 €							180	18.000,00 €	135	13.500,00 €
Drilling	m	55,12 €	420	23.150,40 €	1010	55.671,20 €	420	23.150,40 €	420	23.150,40 €	420	23.150,40 €
Deviation	m	25,00 €							420	10.500,00 €	420	10.500,00 €
PVC pipe installation	m	22,79 €	436,8	9.954,67 €								
Freezing pipe installation	m	100,00 €							420	42.000,00 €	420	42.000,00 €
Plastic sheath	m	14,88 €	420	6.249,60 €					420	6.249,60 €	420	6.249,60 €
Cement	t	220,00 €	52	11.440,00 €	323,2	71.104,00 €	425	93.500,00 €				
Grouting	mc	239,15 €	152,5	36.470,93 €								
Jet grouting MF Ø1000*	m	132,47 €			808	51.364,56 €						
Jet grouting DF Ø1800*	m	416,00 €					336	116.625,60 €				
Freezing - Brine	d	5.700,00 €							30	171.000,00 €		
Maintenance - Brine	d	4.100,00 €							30	123.000,00 €		
Energy Freezing Brine	kWh	0,184 €							36800	6.780,47 €		
Energy Maintenance Brine	kWh	0,184 €							22100	4.071,97 €		
Freezing - LN	lt	0,15 €									864000	129.600,00 €
Maintenance - LN	lt	0,15 €									810000	121.500,00 €
Exercise - LN	d	8.000,00 €									30	240.000,00 €

Tab. 11-1, Cost estimation for the five techniques, focus on the construction processes.

The estimation is derived from the design assumptions of the ideal case study provided, current market prices, and the team's professional expertise in similar projects.

11.2 Life cycle cost analysis for the case studies

For the case of construction processes, which is the level of the LCA analysis considered in this thesis, the cost evaluation spans a length shorter than the entire life cycle. A whole life cycle cost assessment makes sense when a medium- to long-term operation perspective is taken for the infrastructure. In this sense, the proposed evaluation made here might be thought of as a “brick” to be inserted into the broader assessment framework: the cost of the particular geotechnical intervention provides valuable input in the overall assessment of the infrastructure.

Still, from the perspective of the construction process, the cost point of view is critical to the decision-makers. This is why the three-phased method evaluation should be made in conjunction with a complete cost analysis.

The soil treatment techniques that have been described, because of their technological nature, imply peculiarities that can have a significant weight in the sustainability framework under both the aspects of the costs and of the overall infrastructure conception.

At first, these techniques are often used for building temporary structures that end their functionality once the primary final structure has been completed and becomes able to carry autonomously the loads previously acting on the provisional treated soil structure. This is the case of our ideal case design study example, where the treatment is ‘preparatory’ to the execution of a final lining made after the opening excavation.

For soil permeation and jet grouting, the treatment impact and its cost end when the intervention is completed: the functions of the side's mechanical retaining and hydraulic watertightness are then provided in a “passive” mode. Soil freezing treatment also includes the excavation stage, where it remains “active” to provide its static and hydraulic functionality fully.

A differentiation between these technologies shall come out also in a further stage of the LCA/LCCA, beyond the “gate”, for example, in the decommissioning stage: grouting produces a physical, permanent change of the ground fabric (voids filling and grain cementation in permeation grouting; partial substitution and more homogeneous cementation up to produce a sort of poor concrete in jet grouting), while freezing freezes the groundwater temporarily. The latter technology may also produce different impacts, for instance, during the thawing phase: in cohesive soils (silt, clay) settlements quickly develop to the point that the design foresees an accurate monitoring system of soil and structures behavior and remediation intervention, such as compensation grouting, to be performed after the freezing work according to the ongoing controls.

The latter phenomena evidence the concept of uncertainty implied in assessing structures’ behavior. For the geotechnical structures, we talk of “epistemic uncertainty”, associated with the fact that the treatments concern the natural, existing soil, which actual conditions are just generally known and lack of knowledge about its state persists; their execution must be managed differently, for example, from the construction of a new structure made by concrete or steel, where an aleatory uncertainty is related to the randomness due to a specific operation (the cast of a beam) [Der Kiureghan, Ditlevsen - 2009; Spross et al. – 2022]. This concept has a direct impact on the LCA of soil treatments: as an effect of the actual soil conditions, performing them, the material consumption may vary more or less as compared to the design prediction made based on the preliminary geotechnical investigation. In the analyzed case study is the cement grout quantity for the permeation grouting and the jet grouting, as well as the liquid nitrogen or energy for the brine cooling and pumping plant consumption for the ground freezing. This variability, originated by the epistemic uncertainty, has been considered in the case study adopting consumption amounts derived from the practice, and it is reflected in the cost evaluation. Another similar example is given by the drilling deviation in the ground, which usually is considered as an aleatory uncertainty related to the drilling operation, but that, when performed in soil strata including cobblestones and boulders, could be more precisely defined affected by an epistemic uncertainty.

Going back to the soil treatment scope, in some cases, it has a permanent function, as, for example, in creating impervious curtains for dams or along riversides, in improving soil behavior against sand liquefaction, and in improving ground mechanical behavior for shallow foundation or micropiles (i.e. tubfix bulbs). It involves an impact on the LCA and LCCA beyond the “gate” stage because the efficiency of the so-created geotechnical structure has to be checked over time, according to the observational method, by monitoring one or more critical parameters, as well as it may require a maintenance intervention.

An example is an impervious curtain in the ground made with the permeation grouting technique. The efficiency check can occur by monitoring the groundwater level with piezometers over time. In case of anomalies, performing permeability tests in drilling holes may be possible. Finally, a “maintenance” intervention can be set up by performing new permeation grouting treatments in the missing zone of the curtain. A similar strategy shall be considered in the LCA and LCCA for a definitive intervention.

Consider also the treatment time execution: it impacts straightforwardly on the pilot case LCA. Nevertheless, it can fall into a broader framework of an infrastructure sustainability assessment, for example, by defining its construction stages. There may be conditions in which several soil treatments can or must be performed simultaneously, as well as, on the contrary, they have to be carried out at different moments, impacting the related costs.

Finally, there are conditions where an intervention may be partially exploited (and therefore re-used) for further building stages of a structure or infrastructure, with effects on the LCA and the LCCA of a single process and the overall work. Considering the pilot case, consider excavating a new opening beside the first one, exploiting the treatment made for one of its walls. The grouting treatments (“passive” type) could be directly re-used without any new intervention. Differently, the freezing treatments (“active” type) would require the re-activation of the cooling circuits, with a wide range of consumption (of nitrogen or energy), depending on this takes place a long time after the completion of the previous work, with the thawing of the soil, as well as just at the end of the same work, with the possibility even to go on with the maintenance stage of the already frozen soil wall.

So, considering the “cradle-to-gate” approach of the presented method, we provide in the following chapter a cost evaluation of each work made with the different analyzed technologies, referring to the pilot case, putting in evidence their necessary execution times up to the end of the lining cast, neglecting any impact produced on the excavated material.

11.3 Synthesis and comparison of the 5 cost impact analysis

The cost of the different soil treatment solutions analyzed in the pilot case has been presented in the previous table of the chapter.

Permeation grouting results as the most cost-effective technology, followed by the jet grouting treatments while freezing treatments appear to be more expensive, around two times that the jet grouting works.

The following figure, based on the estimate above, gives the data by distinguishing the cost for the site preparation, the drilling and pipe installation (evaluable only for permeation grouting and ground freezing), and the typical activity of each technology: the injection for the permeation grouting, the jet grouting (including the drilling phase) and the freezing process with brine or LN. Also, the total treatment execution time is shown.

The costs of the site plants for the grouting-based technologies are similar and grow with the complexity of the equipment: low-pressure pumps for the permeation grouting, high-pressure pumps for single-fluid jet grouting, additional air compressors and larger grout mixers for double-fluid jet grouting.

The closed system freezing plant has a high-cost impact due to the complexity of the refrigerator group for the brine that requires a secondary plant with a cooling tower. On the contrary, in this case, the freezing open system is very cost-effective because it requires just the distribution plant to be fed directly by the truck that delivers the liquid nitrogen on-site. In a more complex context, it must be considered the presence of tanks for the storage of the cement for the grouts (permeation grouting and jet grouting) and of the liquid nitrogen, as well as an additional freezing group for the freezing brine system (usually together with a back-up group for guaranteeing the freezing process continuity also in case of breakdown of one unit).

The drilling activity is common to all the technologies, and its impact on the costs hangs on the necessary drilling total length, except for the freezing, which requires an additional cost for performing an exact survey of the drilling deviations necessary for the correct management of the treatment process; this is based on the interpretation of the temperature in the soil (given by thermometric sensors placed into dedicate additional pipes) at a known distance from the cooling source, i.e. the freezing pipes.

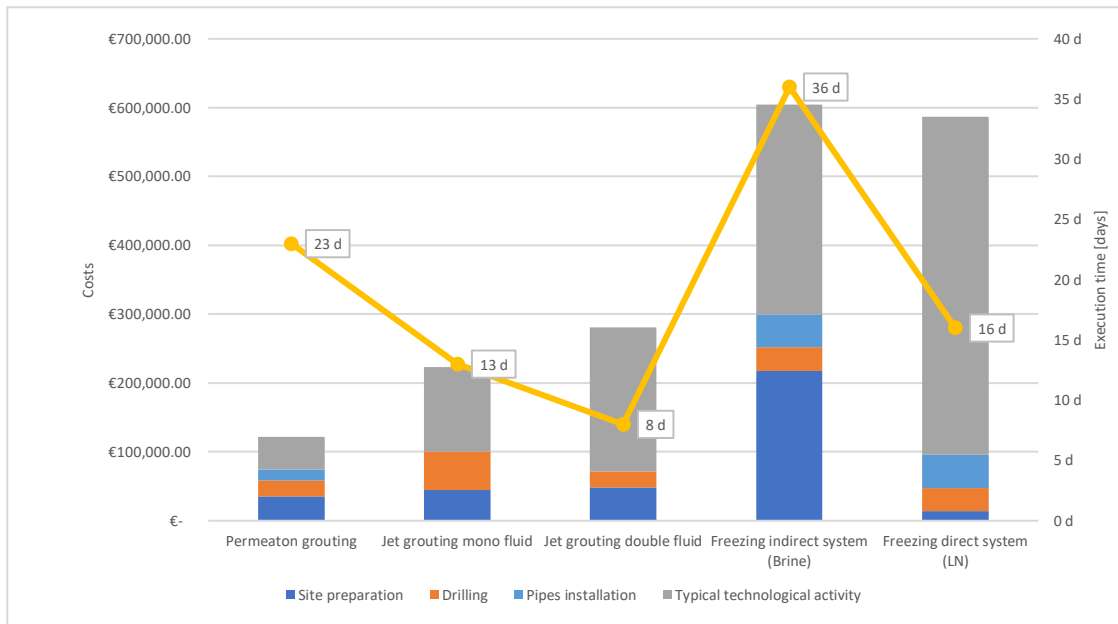


Fig. 11-1, Quantitative cost assessment of the different treatment solution analyzed with the pilot case – Main cost classes (For jet grouting cases, drilling is included in the typical technological activity)

The pipe installation in the ground is necessary for the permeation grouting, where PVC pipes are used, and for the ground freezing, where special double coaxial stainless-steel pipes must be adopted. The cost difference between the two technologies comes from the different materials and constitutions.

The significant cost difference is then generally given by the typical material dosage for each technology. The volume quantity of cement grout injected with the permeation grouting (around 150 mc) is lower than with the jet grouting: around 430 mc with the simple fluid system and around 560 mc with the double fluid system. Technology complexity in the two latter systems impacts the execution cost voices. The freezing open system shows a very high cost due to the liquid nitrogen; this evidences the high importance of the process management using this technology, which, as seen from the LCA analysis, appears as the less impactful technology among the five considered in this analysis. The freezing closed system costs are related to the cost of managing and maintaining the brine freezing plant and distribution circuit, together with the electrical energy consumption.

The figure also plots the execution timing that has been estimated in labor days. They have been evaluated starting from drilling to when the treatment is effective, and the excavation can start.

For the jet grouting technologies, the high number of columns necessary for the treatment, deriving from their geometrical dimensions ($\varnothing 1,00$ m for single fluid, $\varnothing 1,80$ m for double fluid) impacts directly on the execution times. The permeation grouting appears as a slowly technology, but at the scale of the pilot case it is definitely underused: in facts a single plant can serve up to 15-20 grouting pumps, while for the studied case only 2 were necessary. The freezing times using liquid nitrogen vary usually between 7 and 12 days, being influenced more by the soil nature than from the soil volume to be treated. This is true also for the brine system, but in a range of time varying between 30 and 60 days. The short times of the open cycle system can be performed thanks to the particularly high cryogenic power provided by the liquid nitrogen technology, differently from the brine used in the closed cycle system.

The following table summarizes the cost and time data concerning the techniques together with the Envision/DNSH scoring.

CATEGORY	PERMEATION GROUTING	JET GROUTING SINGLE FLUID	JET GROUTING DOUBLE FLUID	BRINE FREEZING	NITROGEN FREEZING
Envision rating (% total score)	45%	39%	31%	49%	49%
DNSH rating (% total score)	48%	41%	33%	51%	48%
Project cost (€ 2020)	122265,6	223140	281276	604752	586500
Project duration (days)	23	13	8	36	16

Fig. 11-2, Summary of the main performance indicators of the considered ground improvement techniques

The sensible reduction in duration compensates for the substantial increase in costs going from permeation grouting to jet grouting, while the sustainability performance worsens. This is very different for the ground freezing cases where the cost is significantly higher than the ‘grouting’ techniques; the time takes longer, but the sustainability performance improves.

12 Social Impact Assessment based on CO₂eq emissions based on the outputs of the LCA evaluations

12.1 The Social Cost of Greenhouse Gas Emissions

The social life cycle assessment (S-LCA) is a methodology employed to evaluate the social and sociological dimensions of products and services, as well as their current and potential positive and negative effects throughout their life cycle. This paper explores the many stages involved in the extraction and processing of raw materials, as well as the subsequent processes of manufacture, distribution, usage, reuse, maintenance, recycling, and final disposal. Social life cycle assessment (S-LCA) incorporates both generic and site-specific data, encompassing quantitative, semi-quantitative, and qualitative information. This approach serves as a valuable supplement to environmental life cycle assessment (LCA) and life cycle costing (LCC) methodologies. This strategy has the potential to be utilized independently or in conjunction with other methodologies.

The social implications and advantages of civil infrastructure projects are closely intertwined with the objectives of sustainable development, such as the promotion of health and safety, poverty eradication, addressing food insecurity, and decreasing disparities (United Nations, 2015). Nevertheless, existing Social Life Cycle Assessment (S-LCA) approaches frequently rely on qualitative or semiquantitative methodologies, which might introduce a certain level of subjectivity (Neugebauer et al., 2015). There is a need for recommendations and guidance regarding the optimal approaches to conducting quantitative Social Life Cycle Assessment (S-LCA). This includes the development of methods for assessing a wide range of social indicators in order to compare the societal implications of various technologies used in infrastructure construction, such as different ground improvement methods (Raymond et al., 2021).

As a quantitative output from the presented LCA analyses performed for the different ground improvement treatments, an evaluation of CO₂eq emissions as a KPI for the climate change impact has been produced. The connection between this KPI and the overall impact of GHG emissions, also in social terms, has been studied in different policy approaches (the carbon tax concept was born from this kind of discussion. Following Reynolds (2021), our approach quantified the social damage costs from greenhouse gas (GHG) emissions as an indicator of the potential socioeconomic impacts associated with each ground improvement method.

The intermediate estimates of social cost of greenhouse gases (SC-GHG), which were approved by the Interagency Working Group in February 2021, delineate the association between society and climate change through four key elements: socioeconomics, physical climate, damages, and discounting. Every module functions as a provider of inputs for the subsequent module. Socioeconomic variables exert a significant influence on emissions, hence playing a crucial role in shaping climate alterations. Climatic changes give rise to adverse physical impacts on the climate. The aforementioned damages pertain to economic losses, which are subsequently subjected to a discounting process. The modeling technique employed in this study involves a systematic linear progression through each module towards the estimation of the supply chain greenhouse gas (SC-GHG) emissions. Additionally, the methodology accounts for the interdependencies across various modules, since some outputs from one module serve as inputs to other modules. The interplay between socioeconomics and climate is reciprocal, since climatic conditions and the resulting damages to the climate system have a significant impact on many socioeconomic elements. The figure below illustrates the interconnectedness of these modules and identifies the modules that are crucial in determining the scope of inputs and outputs to be included in the estimations of the SC-GHG.

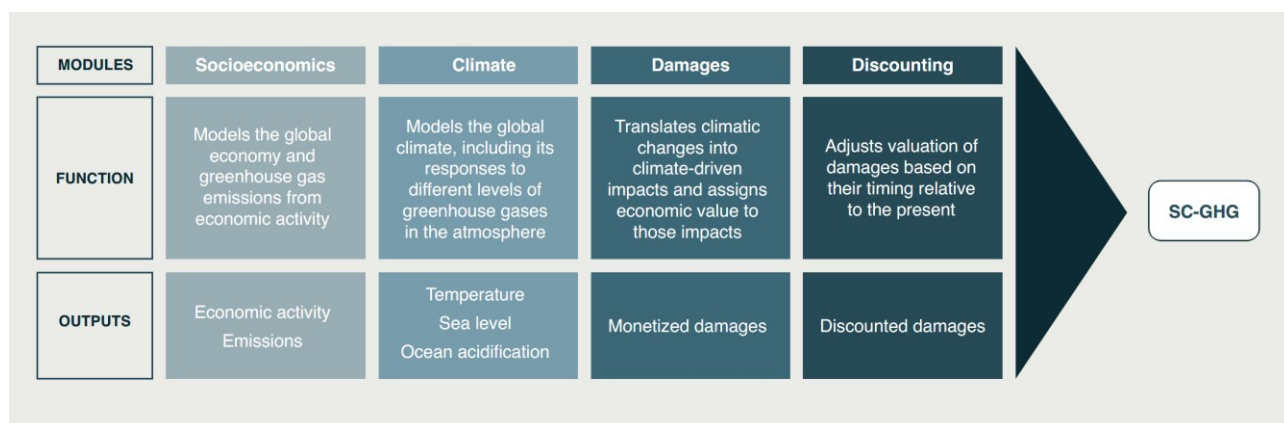


Fig. 12-1, The method for SC-GHG evaluation. (USEPA 2021)

The social cost of greenhouse gas (GHG) emissions, referred to as SC-GHG, is a quantitative assessment of the financial costs associated with the additional environmental damages resulting from incremental increases in GHG emissions during a specific time frame. This estimation was computed for each ground improvement technique by employing the below mathematical equation. (IWG on Social Cost of Greenhouse Gases 2016; Marten et al. 2015a, b and 2021):

$$SC-GHG = SC-CO_2 \times \Sigma CO_2 + SC-CH_4 \times \Sigma CH_4 + SC-NO_2 \times \Sigma N_2O$$

where ΣCO_2 , ΣCH_4 , and ΣN_2O are the CO_2 , CH_4 , and N_2O emissions (kg) over the life cycle illustrated in the process schemes presented in the previous chapters for each of the techniques that we analyzed.

According to the United States Environmental Protection Agency (USEPA 2021), the anticipated societal cost of carbon dioxide (SC- CO_2) was \$0.054 per kilogram of CO_2 in 2023. While the social cost estimates may not provide a thorough analysis, they serve as a valuable tool for conveying the climate-related consequences of human-caused greenhouse gas emissions in relation to socioeconomic harm. The provided table (USEPA 2021) presents a comprehensive assessment of the whole of greenhouse gas (GHG) emissions. The study and guidelines have incorporated the 3% average discount rate and statistic as an intermediate measure.

Table A-1: Annual SC- CO_2 , 2020 – 2050 (in 2020 dollars per metric ton of CO_2)

Emissions Year	Discount Rate and Statistic			
	5% Average	3% Average	2.5% Average	3% 95 th Percentile
2020	14	51	76	152
2021	15	52	78	155
2022	15	53	79	159
2023	16	54	80	162
2024	16	55	82	166
2025	17	56	83	169
2026	17	57	84	173
2027	18	59	86	176
2028	18	60	87	180
2029	19	61	88	183
2030	19	62	89	187

Tab. 12-1, Social cost of CO_2 emissions, different discount rates models (USEPA 2021).

It is interesting to see that the value exhibits an upward trend in response to the escalation of expenditures incurred as one approaches the 2050 limit (target) date. Since the damages from a ton of CO₂ emissions occur over several decades, the discount rate—which represents the trade-off between present and future consumption—plays a significant role in determining the SCC. For initiatives with both intragenerational and intergenerational effects, U.S. federal agencies generally utilize constant real discount rates of 3 and 7 % each year. However, discounting across very long-time horizons involves incredibly complex concerns of physics, economics, philosophy, and law. Given the existing divergence of opinions within the academic literature on the suitable market interest rate to be employed in this particular scenario, coupled with the inherent uncertainty surrounding potential fluctuations in interest rates over time, the interagency working group opted to utilize three fixed discount rates—namely, 2.5, 3, and 5 percent per annum—so as to include a reasonable and believable spectrum.

The data of the table are represented in the curves below where the average discount rate and statistics are represented in different colors.

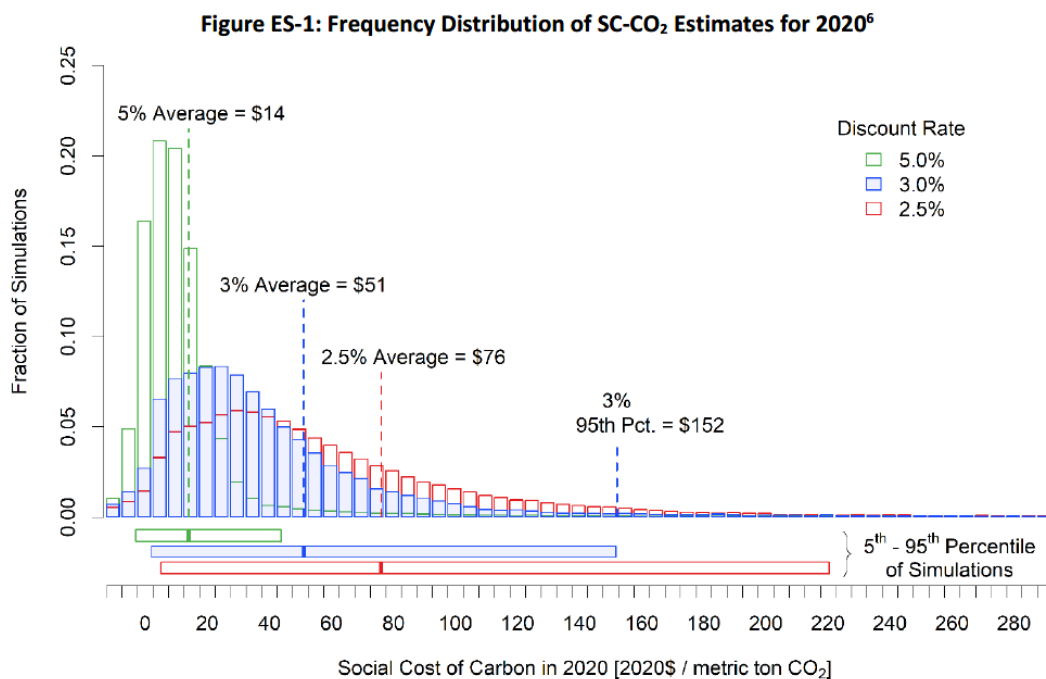


Fig. 12-2, Social cost of CO₂ emissions, USEPA 2021.

The estimates of the Social Cost of Carbon (SCC) increase with time due to the anticipation that future emissions would result in greater additional losses. This is attributed to the growth of the economy and the subsequent strain on physical and economic systems, which are predicted to intensify in reaction to increasingly significant climate changes. The determination of these rates is endogenous in nature, since it is influenced by the models themselves. These rates are contingent upon several assumptions, such as the socioeconomic and emissions scenario, the structure of the model, the distribution of parameters, and the discount rate.

12.2 A remark on CO₂eq emissions

The Environmental Footprint framework of the EU, as implemented by Simapro, gives as greenhouse gas (or GHG for short) emission KPI for the Climate Change impact category the whole CO₂eq emissions, where CO₂eq means the number of metric tons of CO₂ emissions with the same global warming potential as one metric ton of another greenhouse gas.

A greenhouse gas (GHG) refers to any gas present in the Earth's atmosphere that has the ability to absorb and then re-emit heat, resulting in the retention of thermal energy inside the planet's atmosphere at a higher level than would occur naturally. The primary greenhouse gases present in the Earth's atmosphere include water vapor, carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), and ozone.

Greenhouse gases (GHGs) are naturally present in the Earth's atmosphere. However, human activities, such as the combustion of fossil fuels, are contributing to the augmentation of GHG concentrations in the atmosphere. This phenomenon is leading to global warming and subsequent climate change. The Kyoto Protocol is a globally recognized agreement aimed at regulating the emission of greenhouse gases (GHGs) resulting from anthropogenic activities. The specific GHGs subject to regulation within the framework of this treaty are outlined in Table 1. Frequently, these greenhouse gases are commonly known as the "Kyoto gases".

Greenhouse Gas	Global Warming Potential (GWP)
Carbon dioxide (CO ₂)	1
Methane (CH ₄)	29.8
Nitrous oxide(N ₂ O)	273
Hydrofluorocarbons (HFCs)	5-14600
Perfluorocarbons (PFCs)	78-12400
Sulfur hexafluoride (SF ₆)	25200
Nitrogen trifluoride (NF ₃)	17400

Tab. 12-2, Kyoto Gases (IPCC 2021 – 6th Assessment Report Values, GWP)

It is noteworthy that various greenhouse gases exhibit distinct atmospheric lifetimes and heat absorption capacities. The term "global warming potential" (GWP) is used to quantify the extent to which a greenhouse gas (GHG) contributes to global warming during a specific timeframe, often spanning 100 years. The Global Warming Potential (GWP) is a metric utilized to quantify the relative warming potential of greenhouse gases (GHGs). Carbon dioxide (CO₂) serves as the reference gas, assigned an index value of 1. The GWP of all other GHGs is determined by the extent to which they contribute to global warming in comparison to CO₂, expressed as a multiple of its warming effect. For instance, the global warming potential (GWP) of methane is 29.8, indicating that 1 kilogram of methane contributes 29.8 times more warmth over a 100-year timeframe compared to 1 kilogram of carbon dioxide (CO₂).

Carbon dioxide (CO₂) is the predominant greenhouse gas (GHG) generated by anthropogenic activity, both in terms of its sheer volume of emissions and its overall contribution to the phenomenon of global warming. Consequently, the designation "CO₂" is occasionally employed as an abbreviated representation encompassing all greenhouse gases. Nonetheless, this practice can lead to ambiguity, and a more precise manner of denoting a group of GHGs collectively is to utilize the phrase "carbon dioxide equivalent" or "CO₂eq" (elucidated subsequently).

Due to its significant role as a greenhouse gas, carbon dioxide (CO₂) is often prioritized in greenhouse gas (GHG) evaluations or reports, while other greenhouse gases are overlooked. Consequently, this selective approach might result in an underestimation of the overall impact of global warming. Greenhouse gas inventories exhibit enhanced comprehensiveness when they encompass the entirety of greenhouse gases (GHGs) rather than only focusing on carbon dioxide (CO₂).

Hence, the term "Carbon dioxide equivalent" or "CO₂eq" is employed to denote various greenhouse gases using a standardized unit. The term "CO₂eq" represents the quantity of carbon dioxide (CO₂) that would provide a comparable global warming effect, regardless of the specific greenhouse gas and its amount.

The quantification of greenhouse gas (GHG) emissions may be represented as carbon dioxide equivalent (CO₂eq) by multiplying the quantity of each GHG by its respective global warming potential (GWP). For instance, when 1 kilogram of methane is released, it may be equivalently represented as 29.8 kilograms of carbon dioxide equivalent (1 kilogram of CH₄ multiplied by 29.8 equals 29.8 kilograms of CO₂eq).

The word "CO₂eq" holds significant use for several reasons. Firstly, it enables the consolidation of several greenhouse gases into a singular numerical value, facilitating a comprehensive representation of gas bundles. Additionally, it facilitates the straightforward comparison of distinct bundles of greenhouse gases by quantifying their collective influence on global warming. Nevertheless, it is imperative to use prudence when juxtaposing CO₂eq aggregates, since it is crucial to ascertain that the contrasted totals encompass identical greenhouse gases (GHGs), so ensuring the feasibility of making equitable comparisons.

Taking into consideration the aforementioned factors, the societal cost of CO₂ emissions has been determined by conducting a life cycle assessment (LCA) and evaluating the CO₂ equivalent (CO₂eq) values. In light of the intricate economic developments following the Covid-19 pandemic and other events like as the Energy and Materials Shortage, Ukraine War, and Inflation Rise, it has been determined that maintaining the 2020 reference for the Dollar/Euro currency is the most prudent course of action.

12.3 Social Impact of CO₂eq emissions evaluation based on the performed LCA

The following table presents a summary of the outcomes obtained from the baseline reference and the sensitivity runs. The carbon dioxide equivalent (CO₂eq) values for each approach have been multiplied by a factor of 54, which has been translated to Euro using the 2023 currency exchange rate of 0.94. After assessing the magnitude of the societal cost, the proportion of this value in relation to the total value of the technology is determined.

PERMEATION GROUTING			Social Cost of CO ₂ , 2020-2050		
Impact category	Quantity Baseline	Unit	\$ 2023 per 1000kg of CO ₂	Baseline Social total cost (CO ₂ eq)	% of project cost
Climate change	44162,18157	kg CO ₂ eq	54	2385	2,1%

JET GROUTING SINGLE FLUID			Social Cost of CO ₂ , 2020-2050		
Impact category	Quantity Baseline	Unit	\$ 2023 per 1000kg of CO ₂	Baseline Social total cost (CO ₂ eq)	% of project cost
Climate change	297937,3618	kg CO ₂ eq	54	16089	7,7%

JET GROUTING DOUBLE FLUID			Social Cost of CO ₂ , 2020-2050		
Impact category	Quantity Baseline	Unit	\$ 2023 per 1000kg of CO ₂	Baseline Social total cost (CO ₂ eq)	% of project cost
Climate change	384881,1106	kg CO ₂ eq	54	20784	7,9%

BRINE FREEZING			Social Cost of CO ₂ , 2020-2050		
Impact category	Quantity Baseline	Unit	\$ 2023 per 1000kg of CO ₂	Baseline Social total cost (CO ₂ eq)	% of project cost
Climate change	45377,18315	kg CO ₂ eq	54	2450	0,4%

NITROGEN FREEZING			Social Cost of CO ₂ , 2020-2050		
Impact category	Quantity Baseline	Unit	\$ 2023 per 1000kg of CO ₂	Baseline Social total cost (CO ₂ eq)	% of project cost
Climate change	12081,5316	kg CO ₂ eq	54	652	0,1%

Tab. 12-3, Evaluation of the Social cost of CO₂eq emissions based on the LCA analyses performed

The significance of the societal cost escalates in the context of jet grouting schemes, whereas it diminishes for freezing approaches.

In order to provide a comprehensive perspective on the quantitative and monetary assessment of the social costs associated with greenhouse gas (GHG) emissions, it is essential to consider this amount in conjunction with the total cost of the intervention for each technique, as discussed in the preceding chapter. Additionally, it is important to take into account the Envision/DNSH scores and the duration of the project, as the latter often plays a crucial role in the ultimate decision-making process. In light of the aforementioned considerations, the subsequent table provides a comprehensive summary of the envision/DNSH scoring, project cost, project time, and societal costs associated with CO₂eq emissions subsequent to the implementation of the suggested three-phased methodology.

CATEGORY	PERMEATION GROUTING	JET GROUTING SINGLE FLUID	JET GROUTING DOUBLE FLUID	BRINE FREEZING	NITROGEN FREEZING
Envision rating (% total score)	45%	39%	31%	49%	49%
DNSH rating (% total score)	48%	41%	33%	51%	48%
Project cost (€ 2020)	122265,6	223140	281276	604752	586500
Project duration (days)	23	13	8	36	16
Social cost (€ 2023 - CO2eq)	2385	16089	20784	2450	652

Tab. 12-4, Overview of the performance for each ground improvement technique

13 Results discussion and further perspectives and steps

13.1 The value of the proposed methodology

An aid to the decision strategic level

The general sustainability frame provided by the above exposed results is on the one hand broad and on the other hand simple and direct to interpret.

Each of the studied processes has been assessed through the identification of the Envision/DNSH indicators selected for geotechnics and ground improvement construction processes. This allowed both to identify the hot spots of the techniques as well as to put them in a more holistic sustainability perspective.

Then, each process has been divided and analyzed distinguishing its material, energy, technology-specific components and contributions and thereafter quantified. The LCA analyses allow for deepening the construction tasks themselves, as well as developed baselines and sensitivities for then comparing each execution process to the others. The variety of the impacts (chosen among the European Environmental Footprint 3.0 framework) enlarges the decision maker's viewing. It moves towards evaluations in the categories of climate change, resource depletion, human toxicity, and many others that emerge depending on the type of the specific treatment process.

This approach aims to provide quantitative support for decisions that incorporate common structural, geotechnical, and constructability analyses, by setting different approaches regarding logistics, materials, equipment, and schedule, at the level of the single practice. The obtained “impact” information can be useful to the project strategic level, in terms of funding, feasibility, community engagement, etc., influencing even deeply the development of the same infrastructure project.

The role of LCA

Comparing the techniques analyzed for the pilot case, the following ranking results in terms of impact, ordered from the lowest rating to the highest: AGF-LN, AGF-BR, PG, JG-SF, JG-DF. On one side the “light” delivery and release system of the main used material to the point to treat into the ground (LN for AGF), on the other the role played by cement related materials (resource depletion, air quality, toxicity) and, in lower measure, by drilling (diesel or electricity powering) (as for the Jet Grouting systems) influenced the result. The latter is anyway strictly related to the intervention characteristics, such as the geotechnical conditions, the context (urban or landscape area), the function also in temporal sense (provisional or long term), the required performance (mechanical, hydraulic). In this sense the LCA analysis provides several questions that have to be addressed in conjunction with the structural, geotechnical and construction approach.

The following table details the relevance of each impact category among the different cases.

Impact category	Unit	PERMEATION GROUTING	JET GROUTING SINGLE	JET GROUTING DOUBLE FLUID	FREEZING NITROGEN	FREEZING BRINE
Total	%	100	100	100	100	100
Climate change	%	46,1	50,9	51,7	16,7	27,4
Ozone depletion	%	0,1	0,1	0,1	0,1	0,2
Ionising radiation	%	1,0	1,1	1,0	1,3	1,6
Photochemical ozone formation	%	4,7	4,6	4,5	3,2	3,3
Particulate matter	%	4,8	4,4	4,3	6,7	4,7
Human toxicity, non-cancer	%	0,9	1,0	1,0	9,8	3,8
Human toxicity, cancer	%	0,4	0,3	0,3	5,1	2,0
Acidification	%	5,5	5,6	5,5	3,4	5,7
Eutrophication, freshwater	%	6,6	5,4	5,5	4,1	5,3
Eutrophication, marine	%	2,3	2,2	2,2	1,3	1,4
Eutrophication, terrestrial	%	3,3	3,3	3,3	1,9	2,2
Ecotoxicity, freshwater	%	4,9	5,1	5,1	3,5	5,9
Land use	%	1,3	1,4	1,4	1,7	2,4
Water use	%	3,4	2,1	1,9	2,3	5,5

Resource use, fossils	%	13,6	12,1	11,7	12,0	19,8
Resource use, minerals and metals	%	1,0	0,5	0,5	27,0	8,7

Tab. 13-1, Case studies comparison, impacts, percentages per treatment.

Both the first phase of the assessment and the results of the baseline case of the treatments point on these elements to focus on for further sensitivity analyses, as already pointed out in the previous chapter:

- Energy focus: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation focus: Improve the rating of diesel transportation fueled trucks.
- Material focus: for cement, reduce the content in clinker (through pozzolana or fly ash additions).

The sensitivity analyses performed for each technique used the data availability of the Ecoinvent database, more in detail each baseline has been expanded including these sustainability upgrades:

- Energy: use of an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string: Electricity, high voltage {IT}| electricity production, hydro, run-of-river | APOS, U.
- Cement: use of Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string: Cement, pozzolana and fly ash 11-35% {Europe without Switzerland}| market for cement, pozzolana and fly ash 11-35% | APOS, U.
- Steel: use of iron coming from scrap, through the Ecoinvent string Iron scrap, unsorted {RoW}| steel production, electric, low-alloyed | APOS, U.
- Transportation: use of trucks Euro6 instead of Euro5, through the Ecoinvent string: Transport, freight, lorry 16-32 metric ton, EURO6 {RER}| transport, freight, lorry 16-32 metric ton, EURO6 | APOS, U.

The analysis is only indicative, because of the generic nature of the data coming from the Ecoinvent database. Customized EPDs as well as material oriented LCAs provided by the suppliers would be highly useful, since a so grounded sensitivity calculation could give a definitely more affordable measure of how much the sustainability performance of the analyzed technique could be improved on the basis of the information coming from the Envision indicators and the LCA baseline analysis.

		PERMEATION GROUTING	JET GROUTING SINGLE FLUID	JET GROUTING DOUBLE FLUID	BRINE FREEZING	NITROGEN FREEZING
Impact category	Unit	S/B (%)	S/B (%)	S/B (%)	S/B (%)	S/B (%)
Climate change	kg CO2 eq	-16,38%	-18,15%	-17,45%	-26,44%	-16,72%
Ozone depletion	kg CFC11 eq	-9,86%	-15,02%	-13,18%	-25,97%	-15,86%
Ionizing radiation	kBq U-235 eq	-13,73%	-16,30%	-13,35%	-31,60%	-34,48%
Photochemical ozone formation	kg NMVOC eq	-13,40%	-17,98%	-19,28%	-24,41%	-16,65%
Particulate matter	disease inc.	-10,31%	-15,05%	-16,66%	-29,61%	-31,59%
Human toxicity, non-cancer	CTUh	-16,13%	-17,81%	-17,18%	-62,60%	-65,58%
Human toxicity, cancer	CTUh	-8,81%	-15,03%	-17,39%	-56,26%	-58,58%
Acidification	mol H+ eq	-14,67%	-18,24%	-17,40%	-27,29%	-19,66%

Eutrophication, freshwater	kg P eq	-7,64%	-12,01%	-9,59%	-30,07%	-29,46%
Eutrophication, marine	kg N eq	-13,08%	-17,60%	-18,77%	-24,39%	-15,93%
Eutrophication, terrestrial	mol N eq	-14,10%	-18,31%	-19,53%	-24,84%	-16,84%
Ecotoxicity, freshwater	CTUe	-17,09%	-19,93%	-17,65%	-27,42%	-19,48%
Land use	Pt	-19,39%	-20,24%	-16,25%	-26,85%	-11,78%
Water use	m3 depriv.	-6,97%	-14,27%	-5,81%	-31,40%	-29,61%
Resource use, fossils	MJ	-11,61%	-16,31%	-13,71%	-27,40%	-20,10%
Resource use, minerals and metals	kg Sb eq	-8,16%	-17,76%	-14,06%	-21,93%	-17,07%

Tab. 13-2, Summary of the reduction of impact for each category and technique (in p.c.).

The table above resumes the impact reduction per category and for each technique, expressed as percentage reduction of the sensitivity analysis results compared with the baseline value.

The three focus areas revealed by the LCA analysis have different relative effects depending on the treatment: renewables can give benefits particularly to freezing techniques, with their necessity of energy (particularly AGF-BR); reduction of clinker in cement is relevant for grouting techniques, while electricity powered devices and more performing diesel engines have a quite transversal beneficial effect.

One step beyond: cost and social costs effects

The evaluation of cost and schedule, as well as estimate of the social effect of GHG emissions provide complementary perspectives to the environmental evaluation; this enlargement completes the sustainability assessment, considering its other two characteristic aspects: economical and social.

CATEGORY	PERMEATION GROUTING	JET GROUTING SINGLE FLUID	JET GROUTING DOUBLE FLUID	BRINE FREEZING	NITROGEN FREEZING
Envision rating (% total score)	45%	39%	31%	49%	49%
DNSH rating (% total score)	48%	41%	33%	51%	48%
Project cost (€ 2020)	122265,6	223140	281276	604752	586500
Project duration (days)	23	13	8	36	16
Social cost (€ 2023 - CO ₂ eq)	2385	16089	20784	2450	652

Tab. 13-3, Overview of the performance for each ground improvement technique technique

Again referring to studied case, the jet grouting processes provide a very good schedule optimization (13 days for JG-SF and 8 days for JG-DF), counteracted by a weaker environmental performance (rated with 39% and 31% by the three phased method). The relative social costs result to be the highest among all the alternatives (varying between 16'000 and 21'000 €). Freezing technologies costs are the most relevant (around 600'000 €); AGF-BR process duration, being necessary its operation during the pilot case pit excavation, is the longest (36 days), but the best as environmental impact and, together with PG, highly socially sustainable (around 2'400 €*CO₂eq), being however far from AGF-LN that has the best performance (600 €*CO₂eq).

13.2 Perspectives for exploiting the LCA analysis for supporting the sustainability assessment of geotechnical works

The presented analyses have shown that when it comes to materials, energy, recycling there is large possibility for improving the sustainability performance of the traditional executional processes, for instance by exploiting the sustainability nature of innovative technologies.

Inventory and Environmental Product Declaration (EPD)

Actually the inventory of the LCA analysis appears to be limited being the existing databases more oriented towards products than processes, and particularly distant from construction processes for infrastructure; the data are generally abstract and not enough representative. As stated also above in this thesis, to face this issue,

we find useful that the industry in itself becomes the source of more refined data, better than let to general institutions to fill this gap giving ‘average’ information. We point out that this push for giving value to the environmental footprint of products, addressed the infrastructure construction market, during the last ten years, to gradually start focusing on the compilation of the Environmental Product Declaration. In that sense the cement industry, as already mentioned, is in this moment at the forefront. Cement producers, together with concrete producers, are ready to deliver EPD for concrete mixes in a cradle to site format, sized right at (and assessed with a specific LCA) the gate of the construction site work. With regard to soil improvement techniques, the following chapter will deepen these issue in the perspective of the geotechnical practice starting from the pilot case test.

LCA “Cradle to gate/stage” step and construction stage

The aim of the presented study is to provide the construction industry and the decision makers (investors, owners, designers, constructors, suppliers, technology developers and producers) for a methodology, as the three phased method, to support them in making construction choices counting on an definite sustainability metric useful at the strategic as well as at the implementation level, for both the whole project view and the single and critical executional processes, in a manner that allows for a transparent sharing of the project contents and for claiming for sustainable measures adopted into the latter

The “cradle to gate” or “cradle to site” LCA stage allows for focusing on the construction phase. This approach works well for material, schedule, equipment, etc. that has to be examined for the feasibility of the work on site, assuming that most of the impacts occur during this phase.

In other cases the here above stated assumption may penalize those materials that play a role during the whole life cycle of an infrastructure and that may produce more impacts (or more savings) during the operation and maintenance life cycle phases. This issue could be faced by extending the length of the LCA to the next phases; or by double checking the decisions that are suggested by the “cradle to site” LCA, considering the repercussions on the operational or maintenance design and planning aspects. Again the cement is a good example: in many soil treatment cases the grout mix operates with a temporary goal, until the main work is completed (for example a tunnel excavation, or a reinforced concrete wall is finished); in several other cases the grout plays a ‘definitive’ role for the considered infrastructure: for instance, an impervious sheet under a dam. Thus durability or maintenance reasons may drive the choices toward an environmentally impacting grout. The proposed LCA approach, if extended to the following life stages of the infrastructure, will allow for informed decisions: it will be possible to quantify the reasons for a less sustainable choice that may be compensated elsewhere in the project.

This methodological approach appears to be appropriate for being applied also to any other geotechnical technology: piles, micropiles, foundations, retaining structures. Even more widely, there is a big number of impacting technologies that can be refined under the sustainability point of view and that needs a quantified and transparent approach in order to penetrate the construction and procurement decision makers.

The LCA based methodology as support to the relationships with the EU and the construction industry

As a matter of fact LCA, EPDs, assessment protocols were developed mainly by academical world, rather than the industry. As for the proposed methodology, that couples Envision, that has established as a pragmatic protocol, with a ‘simple’ use of LCA, can induce a diffusion of the latter in the construction design and practice. Similarly, the connection that comes out with the EU regulation via the DSNH criteria, as part of the method, allows for measuring the sustainable approach, as the finance world needs to support the EU efforts, providing also the suppliers of those technical services for a tool to comply the owners, investors and costumers requirements.

The proposed methodology, focusing to a single construction process, as the soil treatment for the pilot case is, aids the players to expand their design objectives to the whole range of economic, environmental, social

goals: noise and vibration, recycled materials use, waste reuse, water conservation, energy consumption, resource scarcity, economic value, sustainable procurement practices, construction impacts on communities, air quality: in other words to focus not only on greenhouse emissions. The method results to be attractive because it is able to grasp the complexity and variety of the sustainability following a simple guideline that provides quantitative results.

The focusing on Envision and the DNSH EU framework to the ground improvement case, is a systemic approach that can be used to further broaden the range of sustainability indicators. In this case the metrics applied to set the indicator score are shared and stated in a recognized third party protocol (Envision and the Institute for Sustainable Infrastructure) and are commonly adopted by an international community of stakeholders.

In the second phase the method resorts to the LCA, exploiting its powerful role when focused on the process, that may allow it to become the language through which owners and the construction industry can make measurable suitable proposals. The LCA step, referred to the given process, deepens its knowledge and performs a quantitative analysis for sizing its assessment. A fine tuning can be carried out on the basis of the impacts results as well as by comparing the different examined technologies under the environmental point of view (being the social and economic components are embedded in the protocol application). Thus critical and hot points can be identified and brought to the attention of the industry.

13.3 Possible limitations of the method.

After the review here above presented, it comes up that two limitations can be identified so far in the method.

LCA cradle to gate/site limitation

The LCA analysis has been limited to the cradle to gate or the cradle to site phases. In the case of the infrastructure, the larger part of the impact mainly happens during the phases of construction, including the necessary materials and equipment production, as it has been observed also above. The operational phase tends to be focused on the maintenance tasks or on the consumption of energy (that can be easily identified and measured with other methods). The reuse, for the case of infrastructure, can be assimilated to a regenerative maintenance that revamps an old infrastructure back to service. Demolition and reconstruction case appears to be in the future more and more rare, due to the very high investment put in the creation phases. To ways to solve this limitation (that will be subject of further research from our side): expanding the limits of the analysis to further steps like use and maintenance (B1 and B2 in the EN 15978:2011 nomenclature) or creating dimensionless indicators that can embed these phases in a simple way (Chiola, 2022).

The need of enlarging the EPD diffusion

As already stated in this thesis, LCAs are normally based on 'standardized' data coming from international and recognized databases, often far from the construction sites complexity. This approach can be acceptable for LCA analysis focused on the whole life of an infrastructure: the number of products and processes involved and related data is too wide, and it makes sense to recur to simplification, average, and statistics. Differently, referring to an engagement with the procurement office of a contractor, it is required a very detailed knowledge of the working site reality. From here comes the choice we did to focus on the construction processes. As already anticipated, a source of more specific data, considered the current state of the construction industry, is the Environmental Product Declaration (EPD) system. As described in the following chapter that finally considers the practice point of view on the sustainability assessment, the information provided by the EPD can be used to feed reliably the LCA baseline and fine tune the analysis, comparing different updated ingredients involved in ground treatment process. The analyst, based on the results, could compare the products that enhanced their green supply chain and increase the score of the impact as well as the Envision evaluation.

14 The practice of the soil treatment works and the proposed approach

14.1 Moving from the three phased method results

The tree-phased method above presented allows for the quantitative and numerical rating of a geotechnical intervention process sustainability, focusing on the soil treatment technique. As described in the first chapters of this thesis, this is the result of the holistic vision of the sustainability in which not only the economical, but also the social and the environmental impacts of human activities are assessed, finally focused on the infrastructures.

Within the three-phased method, the Envision framework allows for a rating of the specialized technology with respect to the DNSH criteria fixed by the EU policy, being this the door to access to funds and financial instruments.

The LCA has the crucial role of quantifying the environmental impacts provided by the examined process, for example of a ground treatment work, revealing which are the more impactful aspects that seems to work as leverage for a sustainability improvement. Thus, a set of LCA sensitivity analysis provides the gain obtainable by operating on the identified leverages, producing, in order to be refined in the Envision/DNSH framework, an upgraded scoring.

If we look at the entire framework of the sustainability of the ground improvement treatment (and, in the final analysis, of geotechnical works), we can understand that for the latter a sustainability-oriented way to approach the design and execution has to be more deeply diffused in the practice; this because the cultural context for many aspects appears still to be far from the holistic vision that underlies the proposed methodology. In that sense it seems to be useful to try to present some of the crucial aspects of the sustainability issue starting from the usual point of view of designers, executors and even clients directly involved in the ground treatment practice, in order to stimulate them to get closer and gradually familiar with this new approach.

The LCA baseline analysis focused on three main issues that appears to be useful leverage for an improvement of the sustainability of the examined treatment technologies; the LCA sensitivity analysis was then carried out on the base of some possible upgrades.

The main issues, stated in chapter 0 are:

- the energy consumption, for the on-site works, as well as for the equipment and materials production
- the transports to the site of equipment and material
- material production (highlighting the role of the cement, due to clinker content)

14.2 The energy as key-concept to explain the sustainability approach

It is interesting to outline that from the executors and designers' point of view, almost all those technologies are "familiar" to the concept of Energy, that is the first of the above listed issues.

As already written, the jet grouting treatment is approached on this basis: the treatment geometrical dimension (cylindrical for the 2 examined cases) is obtained by evaluating the injection energy (expressed in MJ) with respect to a volumetric specific energy (expressed, for cylindrical systems, in MJ/m³), which results to be correlated, for each type of technology (single fluid, double fluid, etc.) to the soil type and density (Tornaghi et. al, 2004 – ASEP-GI 2004).

In artificial ground freezing this aspect is even more emphasized: the design is based on the thermal analysis, that provides the energy consumption prediction for both the freezing and maintenance stages. This means: electrical power absorption from the freezing plant of the closed method with the brine; liquid nitrogen consumption for the open method. Moreover, the thermometers installed in the ground allow for a monitoring on real time of the freezing process evolution in both operational stages, regardless of the specific technology

adopted (brine or LN), easing the management of the energy to be supplied to the ground (Celot et. al. 2023 - Brennero).

Soil permeation grouting is conceptually assimilable to an energy-governed treatment, but the nature of the treatment effect, the permeation in the soil, is definitely less invasive under this aspect, requiring conceptually less energy than mixing up a fabric, as for JG: in effect the grouting system named “with controlled volume and respect of the soil rejection pressure” also involves the management of pressure and flow rate as well as the JG, to minor scale (Balossi Restelli et al. 2007). In rock grouting, practice not treated in this research, it is often used the GIN (grout intensity number) method, according to an energetic approach of the treatment (Lombardi - 1999).

Thus, the soil treatment designers and executors are aware of the energy as key parameter: even though it has always been considered as a cost source, now it can become the key-concept to enter into the sustainability perspective, that provides a different point of view: the energy consumption, among other causes, produces impacts on the environment. And the energetic parameter gains weight when enlarging the framework to the supply chain of the soil treatment process: apart from the equipment functioning on site, that has been yet immediately grasped from the site of point of view, the energy impacts in producing machinery and materials. As a result, the comparative analysis, presented in this research, may bring in some cases to the choice of a technology according to the sustainability approach criterion, that is different from another, that could have been chosen according to the current ordinary criteria,

Once that the approach is framed, it emerges the primary effect of the materials and the machinery of the supply chain on the achievement of an enhanced sustainability result in these kinds of works.

14.3 The necessity to measure the technical performance of a sustainable soil treatment process: the role of the geotechnical laboratory

The third issue highlighted by 3-Phased method is the material production.

Materials play the major role on the performance of the treatment. The rheology of the grouts, the mechanical parameters of the grouted and the frozen soil, the rapidity of the achieving the required soil conditions are deeply dependent on the behavior of the material used and their interaction with the onsite soils.

For instance, the analysis that we have been carried out shows the big role that cement has on the environmental impacts provided by the jet grouting treatment, where its consumption is very high. Also in the permeation grouting, and in lower measure in the freezing practice, a rate of impact due to the cement use is even recognizable. As a matter of fact, the industry of cement and concrete is nowadays very active in addressing their production processes towards a drastic reduction of the environmental impact, positively and quickly reacting to the stimulation provided by the regulatory framework and the infrastructures big players.

Focusing on the soil treatment field, it seems plausible to study differing grout mixtures recipes in order to improve the sustainability rating of the specialistic works not only by using the enhanced cement types, but also by varying dosages or introducing other components, for example derived from re-cycling processes. In the practice. those kind of “fine-tuning” experiments are requested or carried out by players (clients, designers, supervisors, company specialized in this type of treatment) that usually don’t have the technological support on which cement and concrete producers can rely.

As a matter of fact, it is of primary importance to control the technical performance of the alternative material after the modifications introduced in the light of the environmental sustainability enhancing. For example, the use of recycled material combined to the cement for the preparation of a cement-based grout mix for jet grouting or permeation grouting moves, on one hand, toward the sustainability request, but on the other hand, it is necessary to check the mechanical as well the hydraulic behavior provided from grout composed with the

“green” receipt; this may require an optimization study that takes into account the hydromechanical as well as the environmental and economic parameters.

Thus, the geotechnical laboratory is going to take on a crucial role, because it allows to perform standard analysis in controlled conditions, allowing for a fine tuning of the new combination of products of the supply chain of a certain treatment technology.

The permeation grouting treatment may be a good test bench for deepening this issue. The study presented in this thesis has considered, for simplicity, the analysis of the injection of a sole cement-based grout via the TAMs. In the practice the composition of the cement mixture varies at least as a function of the soil composition. Differing from the studied example, where only one grout type has been considered for PG case, very often the multi-stage injection method, thanks to the use of the TAMs, is performed by varying, from stage to stage, the composition of the ternary cement grout to be injected. This is made usually according to the design operational criteria: injecting the soil with grouts having crescent injectability, in order to gradually and efficiently permeate the voids of the soil fabric. And usually, according to the soil granulometric composition of the soil (even distinguishing its major layers in the local stratigraphy), more fluid and penetrant chemical grouts (silica-based grouts are commonly most used) are injected in third or fourth stage (being neither uncommon to achieve five grouting stages in selected sleeves corresponding to identified soil layers).

When the PG treatment has relevant extension and importance within a wider project (for example, tunnels and passages excavation for a metro line in urban context), it is common to invest on a preliminary laboratory test campaign in order to set up the variety of possible grout mixes (Pettinaroli et al., 2019) to be injected during the construction works, testing different components (cement, bentonite, admixtures, silica grout components) with differing proportion in order to optimize the rheological behavior during the injection, as well as the mechanical and hydraulic performance that can be expected by the treated soil.

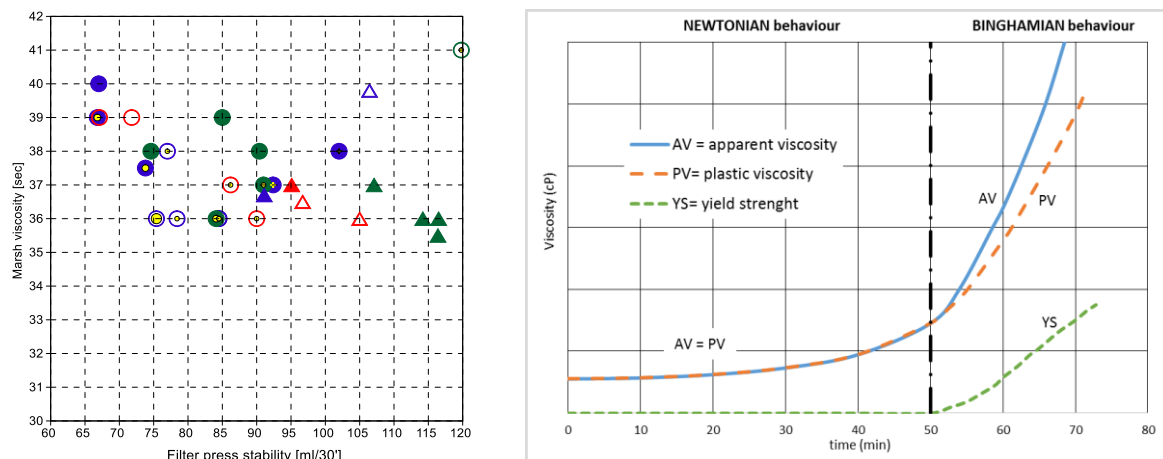


Fig. 14-1 Laboratory preliminary test on grouts rheological parameters – on the left Marsh viscosity vs. filter press stability of cement grouts; on the right viscosity vs. groutability time for silica grouts (Pettinaroli et al., 2019)

The laboratory tests that, more or less frequently, are carried out generally during the preliminary phase of a treatment work, are requested by the designer and the client in view of an efficient performance of the treatment, and by the executor in order to optimize the cost of the grout at the same performance.

Now the importance of the sustainability as assessment criterium may definitely change the perspectives. The green procurement system, as explained in this study, under the effort of the regulatory framework, will award sustainable geotechnical practice, and geotechnical laboratory can give a useful support to the entire supply change of a ground treatment work, i.e. clients, designers, producers and executors, by providing useful tests that proves the performance validity of a sustainable element of the process.

Within this context, it appears again very clearly the importance of the diffusion of EPD labelling for the products of a technique supply chain: the three phased method allows for a quick upgrade of the sustainability assessment by introducing, in its second step based on the LCA, the proper inputs in the inventory stage (LCI) and then processing the impact assessment (LCIA) with consistent data and proceeding with sensitive analysis according to the laboratory testing results. The tailored size that can be achieved with this approach allows for a reliable customized assessment of the sustainability of a geotechnical work, and consequently a consistent output to be implemented in the wider framework of the main work (for example, an infrastructure) thus contributing to the rating enhancing of the latter.

This approach has been described for a single material (the grout mixture) used for ground treatment, but it could be followed for the equipment, for examples the tube a manchettes, and extended to mechanical machinery as the injectors, the packers, and so on.

The figure below resumes roughly, for the five discussed cases, the machinery used on site as well as the materials through the various stage of the work. A big variety of parameters can be examined under the sustainability enhancing aspects, within each process; several of them are even common to the different technologies.

We point out that in the last column of table, highlighted by red borders, it is described the residual material that is expected to be found in the ground when the treatment task is completed, belonging to a further step that actually has not been included in three phased method: in a LCA vision, this is beyond the “site” boundary and belongs further to the “site-to-grave” stage of the ground improvement technique, where the process impacts may largely vary according to main infrastructure construction and life. As stated in Chapter 0, Ma this issue appears as a challenging extension and prosecution of the current research.

Technique	Drilling equipment	Storage	Process equipment	Distribution system	Inside the ground	Improvement Agent	Treated ground	On site spoil	Longe term residues
PG-TAM	Drilling unit	Tanks Bags	High turbulence mixer Agitators Injectors	Pipelines Pipes	Tube à manchettes	Grout (water,cement, bentonite, admixture)	Grouted soil	Drilling spoil Grout process residual spoil	Grouted soil TAM filled with grout
JG-SF			High turbulence mixer Pumps	Pipelines Pipes	Direct by drilling unit via nozzle(s)	Grout (water,cement)	Mix of soil and grout	Drilling spoil Spoil of mixed grouot and soil	Jet grouted soil
JG-DF			High turbulence mixer Pumps Air compessor						
AGF-BR		(*)	Refrigerator plant (Evaporator+Cooling tower) Pumps	Pipelines	possible metallic sacrifcal pipe+coaxial pipes	Brine	Frozen soil	Drilling spoil	Probes' external pipes
AGF-LN		Pressurized Tanks Trucks (*)		Pipelines	possible metallic sacrifcal pipe+coaxial pipes	Nitrogen	Forzen soil	Drilling spoil	Probes' external pipes

Tab. 14-1, Classification of equipment and materials used on site for the 5 soil treatment techniques

The holistic approach, inherent in the Life Cycle point of view, addresses to consider the wide technological process of a ground treatment type in its development path towards a sustainability improvement. At first glance this seems a very ambitious goal, that requires a change of size in the performance testing scale, such as, for instance, an on-site trial field. But geotechnical laboratory can still have a role also at this level as it will be described hereafter.

In the following paragraphs the geotechnical laboratory activities are presented, in the perspectives of the sustainability assessment based on the proposed three phased method for the considered ground improvement techniques: permeation grouting, artificial ground freezing, jet grouting

14.4 The permeation grouting and the Injection Tube System® device

Referring to permeation grouting, ITS - Injection Tube System®⁷ is a laboratory equipment that allows to execute in controlled conditions, a permeation grouting multistage injection via a single sleeve of a TAM, treating a soil volume with known grain composition, characteristic and parameters.

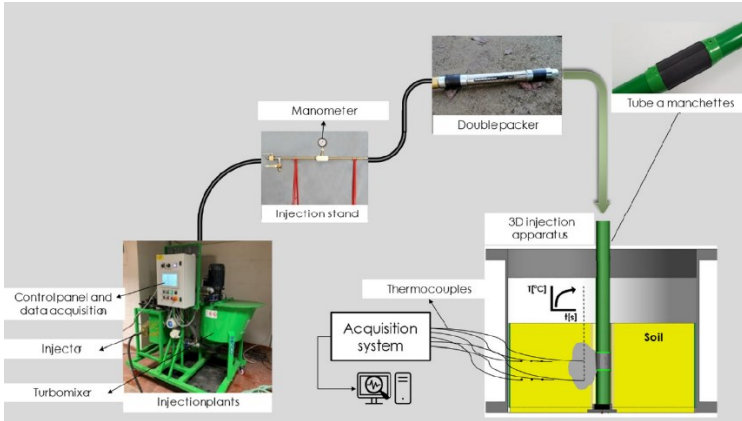


Fig. 14-2, ITS – Injection Tube System® allows to perform on real scale the permeation grouting treatment process in laboratory (Galli, 2023)

The grout mixer, the injector controlled by a computer, the packer and the pipelines have been chosen among the equipment devices available on the market for operating permeation routing on site.

ITS allows to replicate the entire process of permeation grouting. It is possible to track the grout diffusion in the soil. The sampling of specimen from the grouting soil allows for direct analysis of the treated soil as well as well for execution of standard mechanical, hydraulic and environmental tests

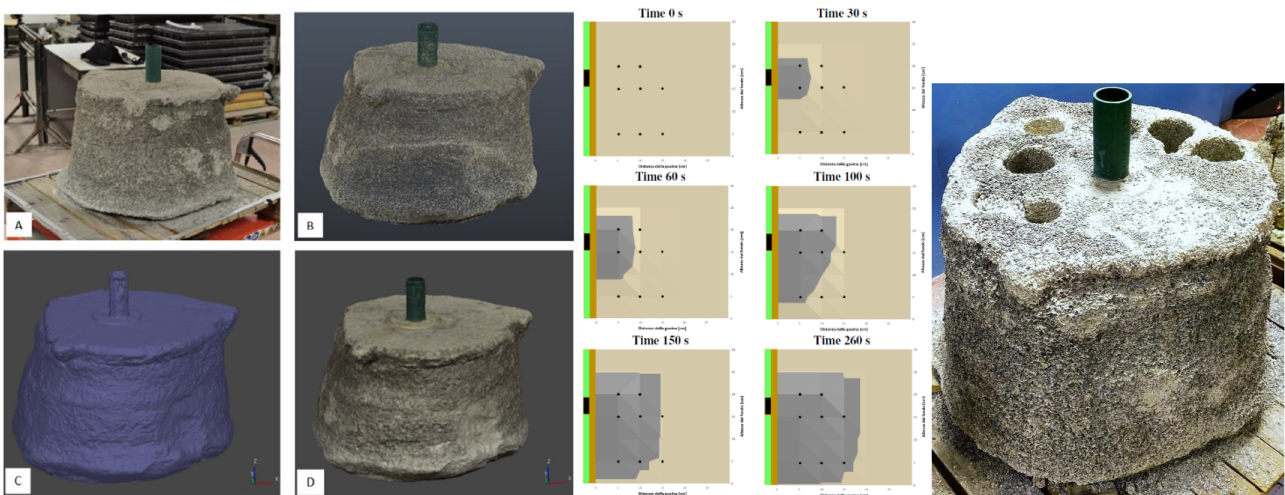


Fig. 14-3, ITS ® - left: photogrammetry and laser scansion for determining the treated soil volume – center: grout diffusion in the soil measured by thermometric sensors – treated soil after specimens sampling (Galli, 2023)

⁷ Patented equipment of GroutFreezLab s.r.l. (GFLab), a Bicocca University spin-off company (sponsor of this Executive PhD) and granted by University4Innovation in 2018. The author of this thesis is one of the ITS inventors and developers

Controls on the grouts can be implemented adopting the multistage methodology, grouting ITS with different type of mixtures provided, in their complete receipt or just for single components, by differing producers. The practice shows that this assembly may be affected by compatibility difficult in providing a final efficient and reliable final result of the treatment.

The following conceptual chart flow shows a mixture testing according to the 3-phased method.

The approach can be easily applied to a multistage grouting process, as explained above, as well as to other material or device, or process stage. Finally, it could be drawn to the entire process, mutatis mutandi.

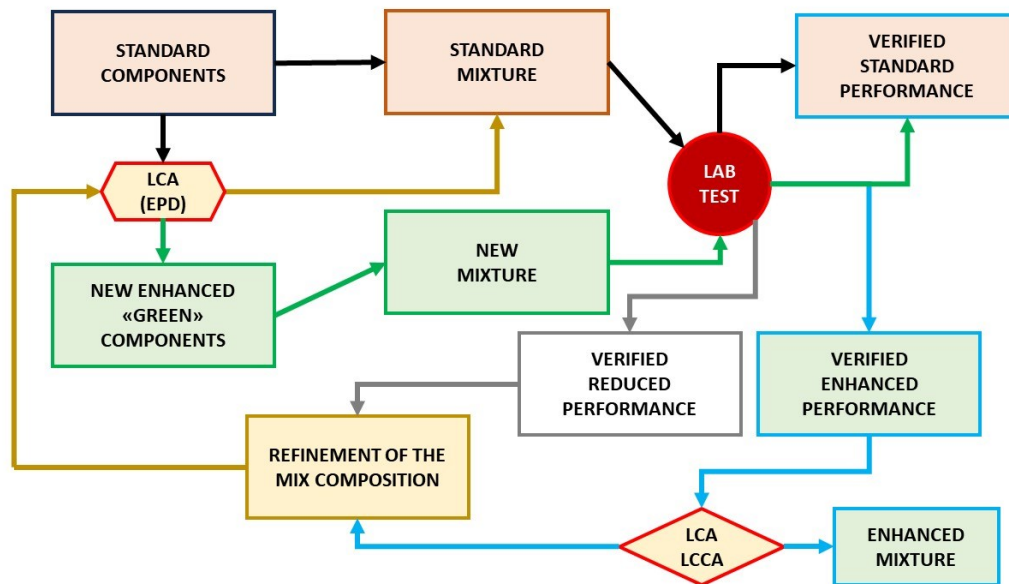


Fig. 14-4, Conceptual chart flow of laboratory mixture testing according to the 3-phased method.

In the current practice, there are players of the supply chain of the permeation grouting are approaching the sustainability challenge by deepening the knowledge and the environmental labelling of their products, as well by proposing innovative solutions.

Among the tube à manchettes, on the market are available pipes in recycled pvc, which use is rather diffused, when a lower performance is required by the intervention design. Moreover, TAMs with biodegradable plastic are also available (SIREG Durvinil Biosystem), destined to produce very low impact in the “site-to-grave” stage of a treatment process life, but for sure improving from the beginning the sustainability rating of the works in which they are adopted, allowing for an increased rating of the main structure or infrastructure construction, to which the treatment is destined to.

Again, the author starting recently to participate, with GFLab, to the sustainability set-up of a grout mixture, by mean of ITS, according to the above-described conceptual path on behalf of a primary producer.

14.5 The artificial ground freezing

AGF technologies assessment using the three phased method provided several interesting indications.

The first phase evaluation put both the AGF systems (with brine as well with LN) as the more efficient under the sustainability, according to a preliminary assessment carried out referring to the standard available information and perception of this type of treatment.

The second phase carried out with the LCA definitely confirmed the lower impact scenario provided by this technology, particularly in the case of the open method that exploits the cryogenic powerful effect of the change of state of the nitrogen, from liquid to gas.

The third phase, looking for a refinement based on the possible leverage effects provided by a different approach in the process supply chain, didn't particularly awarded the freezing, notably LN: this can be explained with the fact that the entire process is already organized with an attention degree to the efficiency that for AGF-LN is already remarkable higher than in the other examined treatment techniques.

The LCCA and S-LCA analysis (as discussed in Chapters 0 and 12) demonstrated finally the very sustainable nature of this kind of treatment, which major limitation is for sure the temporary functionality in improving the ground properties. Rare cases of long-term use are strictly related to mining activities for rare, high value material extraction, as the Cigar Lake Uranium mine in Canada, where a closed circuit AGF is ongoing since 1991 (L. Newman et al. – 2023)

The author is actually engaged, again with GFLab⁸, in the development of a laboratory equipment having the aim to study in controlled conditions the thermal behavior of a freezing probe into a soil volume, together with the related devices in order characterize the thermal phenomena at that scale, the possible optimizations, and finally to set up and validate a 3D code (Bavaresco et al.; 2023) on the basis of the experimental results. One of the further developments of the research will be addressed to assess the environmental impact improvement provided by the identified optimizations.

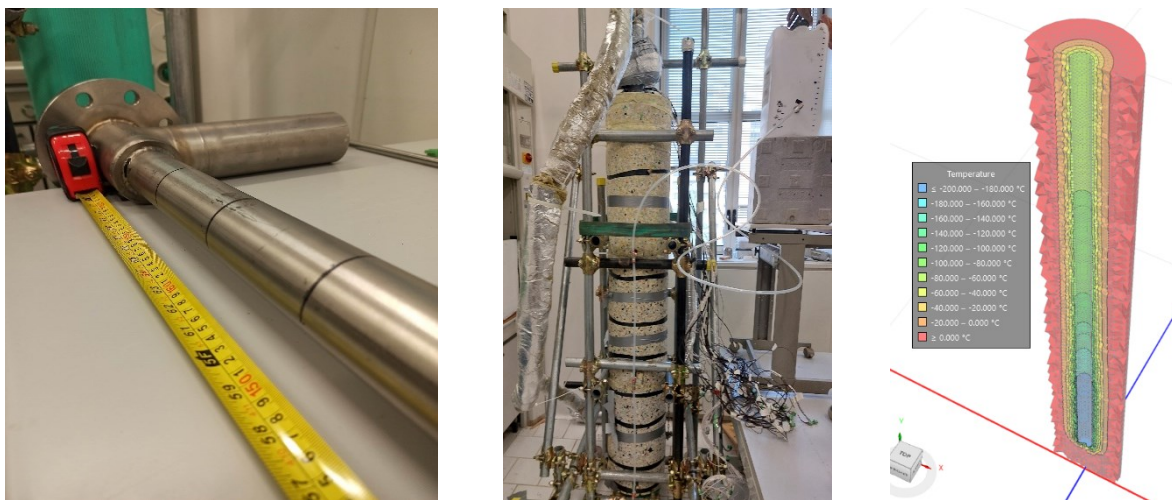


Fig. 14-5, GFLab - Ongoing laboratory test on freezing pipe (Bavaresco, 2023)

More in general, it emerges that in AGF the monitoring of the temperature in ground is a fundamental activity that aids in the freezing process management, providing a direct positive effect on the energy consumption optimization, that reverberates in a reduction of the environmental impact due to the freezing process. Beside the traditional installation of punctual thermometric probes, the recent introduction of optical fibers allows for providing for temperature data all along the freezing probes, increasing dramatically the number of measures

⁸ Ref, PhD thesis under submission “Innovation applied to artificial freezing of soils: an experimental study to enhanced theoretical and numerical analysis” by N. Bavaresco, 2023

and thus widening the possibility of the process control and optimization, with positive returns under the environmental point of view.

A review of the state of the art of the AGF practice highlighted the rather recent use of the liquid carbon dioxide (CO₂) as coolant, adopting also a special inner element of the freezing probe (Soma H., 2023); a reduction of energy consumption in the freezing process is documented.

Finally, contributes to promote the sensibility on the environmental sustainability of the ground freezing practice begin to appear in international context (Applegate et al., 2023), even though in terms of useful arrangement recommendation rather than a systematic assessment.

14.6 The jet grouting

The results of the 3 phased method analysis have undoubtedly put in evidence the great impact provided by the jet grouting technique, that is deeply connected with the intensive use of cement of this technology. For sure, the action that the cement industry is performing will be the best vehicle for the improvement of the sustainability performances of jet grouting. On the other hand, it must be underlined that this kind of treatment allows to provide very consistent and efficient mechanical properties to a wide range of soil types, often in relatively short time and with cost effective production.

Also in this case, similarly to the permeation grouting, modifications in the cement-based mixture are in some cases studied. The laboratory test allows for the evaluation of the rheology of the grouts. In a further stage, after the execution of a trial-field on site, laboratory test on sampled specimens can perform mechanical, hydraulic and even environmental test: leaching test with different duration on treated soil can give indication on the stability of the jet grouted soil and the potential release of components or chemical substances to the ground water.

About the machinery and its equipment, it has to be pointed out that the nozzle efficiency may represent another leverage point, actually probably minor if compared to the cement issue, to which work on.

The development of laboratory equipment for the jet grouting, similar to the ITS® or to the test Freezing Probe appears actually not easy to implement, basically for the high pressures and flow rate involved, but it could represent an interesting goal for the experimental research in soil treatment technology, easing the development of test focused on environmental and sustainability.

14.7 The uncertainty of the geological condition on site: investigations, ground monitoring systems and emergency assessment

Uncertainty of the underground local geological condition is a typical issue to be faced in geotechnical practice.

Geotechnical investigations, carried out in direct way, such as boreholes, corings, piezometers, in-hole mechanical and hydraulic test, or indirect way, such as geoseismic and geoelectric surveys, are currently implemented both during the design stage as well during the works execution, contributing the latter to the observational method implementation.

On one site, they have to be exploit as a way to obtain consistent data about the ground environmental conditions pre-, during and post- the treatment. In other words, the on-site investigation can be inserted from the conception and the design phase into the task to be implemented in order to collect data on the geological and geotechnical context in which the operation takes place, dedicated also to the sustainability point of view.

On the other hand, the investigation itself should be object of a sustainability assessment, being fully part of the processes necessary for constructing an infrastructure.

Another aspect of the geological condition uncertainty is that investigation and monitoring can provide a highly representative geological and geotechnical drawn, but local unknown zones still remain. The residual

associated risk may cause effects (like heaves or settlements of soil on surface or of existing structures as well infrastructures) that may easily lead to modify the treatment execution or even introducing new ones to mitigate those effects. A sensitivity analysis of the context, based on the investigations of the soils and of the potential interfering structures or environments, shall be carried out also under the sustainability point of view. At the level of the ground treatment works, this could be taken into account by statistically considering additional possible integrative intervention, as well as by assessing the full-range sustainability of a possible “B-plan” that could be necessary to be performed just in case of necessity. The agile application of the three-phased method allows for performing, in those cases, a rapid additional assessment also in emergency conditions.

15 Conclusion

A method for the sustainability assessment of soil treatment works for infrastructures buildings has been proposed and tested by applying it to a pilot case with different treatment technologies.

The method is divided in three phases:

- a preliminary assessment of a treatment process is performed according to the Envision protocol, an existing, world-wide recognized framework dedicated to the sustainability assessment of the infrastructures, linked to the EU DNSH criteria provided by the EU taxonomy;
- a quantitative cradle-to-gate LCA analysis of the environmental impacts of the treatment work is implemented, providing a baseline result followed by a fine-tuning second step analysis;
- a refinement of the Envision/DNSH assessment is carried out on the basis of the LCA results.

A scoring system, based on the Envision framework credits, provides a quantitatively rating of the process assessment.

For the method set-up, a pilot case has been studied, considering an open-air excavation in gravelly-sandy soil in presence of water table; the excavation bottom level finds at the top of a clayey impervious stratum.

Three different soil treatment techniques, among the ones currently used, were studied for temporarily improving the ground properties guaranteeing the sides stability and impermeability during the excavation and the lining execution:

- permeation grouting (PG) via tube-à-manchettes;
- jet grouting, considering the two different cases of the single fluid technology (JG-1) and the double fluid technology (JG-2),
- artificial ground freezing carried out using respectively brine (AGF-B) and liquid nitrogen (AGF-LN) as coolant.

The comparative analysis of the pilot case results has pointed out how, among the considered technologies, AGF turns out to be the best rated one, while jet grouting gained the lower scores.

The LCA analysis put evidence, for the both JG versions (MF and DF), the impact derived from the industrial production of the cement, present in relevant quantity in the injection mixture. This result appears to be coherent with energetic approach currently adopted for the design of the jet grouting treatment, in which the role of the cement based mixture is prominent, also than the high pressure injection. The PG process requires a lower grout volume with a lower cement content, to be injected at low pressure; the final score results to be higher than JG, in line with the energetic approach. The two freezing treatments provided also a lower impactful result; the processes are based on a thermal energy exchange, between the coolant and the soil. In one case the brine circulates in a closed circuit with the aid of a pump, with a global energy-intensive process that produces an environmental impact close to the PG technique; in the other case the LN, provided by a well-tested industrial process in pressurized condition to the site, simply expands and circulates into an open circuit being finally released in the air, producing the lowest impact among the studied cases.

The three phased method assesses the 5 technologies under the light of the credits of the Envision protocol, considering also the context of the intervention and the site organization impacts. So for the studied case, it finally awards the AGF-BR process, followed by the AGF-LN and the PG, while the JG performance appears to be one step down.

The pilot case analyses provided consistent results, coherent with the different studied technologies in these specific conditions. Far from providing an absolute rating of the technologies, this approach rather allows, in the practice, for providing a specific assessment of the sustainability of the techniques, case to case basis, considering the effective function that the treatment has to perform, as well as the soil and the site conditions.

The proposed approach allows for various type of evaluations, because of its specificity in analyzing the impacts of the various stages of the studied process: from the possibility to integrate the results into the larger framework of the main infrastructure sustainability assessment, to the design criteria optimization of the intervention and the technological evaluation of the treatment process sustainability, as well as to identifying possible enhancing in the practice by mean of optimization or innovative solutions within the specialistic supply chain.

Referred to latter issue, the thesis focuses on the role that the geotechnical laboratory can have in the perspective of the growing importance of the sustainable performances provided by the soil treatment operations. The LCA results of proposed method second phase can be starting point for laboratory activities. An innovative patented equipment set up by GFLab (a geo-material laboratory established as a spin-off of Bicocca University of Milan), the sponsor of this executive PhD, suitable for performing in lab's-controlled conditions the permeation grouting process at real scale (from a single injection valve) is described in the light of the discussed approach.

The method can be also key in stimulating the construction supply chain to invest on EPD certificates, allowing a better tailored sustainability assessment of the various techniques.

The further research steps will be addressed to support the develop of a realistic inventory for the soil treatment process as well as for the geotechnical work in general, and to extended the method application to other geotechnical works.

16 Bibliography/References

- 1) Adham, Khairul, and Chamhuri Siwar. 2012. "Empirical Investigation of Government Green Procurement (GGP) Practices in Malaysia." <https://papers.ssrn.com/abstract=2073517>. Baumann, H. and Tillman, A-M., 2004. *The Hitch Hiker's Guide to LCA. An orientation in life cycle assessment methodology and application*. Lund, Sweden: Studentlitteratur.
- 2) Almeida Barbosa Franco, Jacqueline de, Ana Mariele Domingues, Nelson de Almeida Africano, Rafael Mattos Deus, and Rosane Aparecida Gomes Battistelle. n.d. "Sustainability in the Civil Construction Sector Supported by Industry 4.0 Technologies: Challenges and Opportunities." <https://doi.org/10.3390/infrastructures7030043>.
- 3) Andersson, Simon, and Martin Listén. 2014. "Life Cycle Impact Assessment: A Comparison of Three Contemporary Methodologies." <https://www.diva-portal.org/smash/record.jsf?pid=diva2:735281>.
- 4) Applegate L. and Mageau D. 2023 – "The business of freezing: expanding the market to meet environmental needs in multiple industries" -11th International Symposium on Ground Freezing – 10-12 October 2023, London (UK) 449-457
- 5) Azapagic A., "Life cycle thinking and life cycle assessment (LCA)," *Sustainable Development in Practice: Case Studies for Engineers and Scientists*, p. 426, 2004.
- 6) Backes, Jana Gerta, and Marzia Traverso. 2021. "Application of Life Cycle Sustainability Assessment in the Construction Sector: A Systematic Literature Review." *Processes* 9 (7): 1248. <https://doi.org/10.3390/pr9071248>.
- 7) Balossi Restelli A., Rovetto E., Bolognino B. 2007 "Ristrutturazione della traversa di Mazzè sulla Dora Baltea. Gli studi preliminari, le opere di fondazione ed il monitoraggio delle strutture". *Atti del XXIII Convegno Nazionale di Geotecnica, Padova - Abano Terme*, 463-470, 2007
- 8) Barbera, Filippo, Nicola Negri, and Angelo Salento. 2018. "From Individual Choice to Collective Voice. Foundational Economy, Local Commons and Citizenship". *Rassegna Italiana Di Sociologia* 59 (2): 371–98. <https://www.rivisteweb.it/doi/10.1423/90584>.
- 9) Bardos, R. Paul, Hayley F. Thomas, Jonathan W. N. Smith, Nicola D. Harries, Frank Evans, Richard Boyle, Trevor Howard, et al. 2020. "Sustainability Assessment Framework and Indicators Developed by SuRF-UK for Land Remediation Option Appraisal." *Remediation Journal* 31 (1): 5–27. <https://doi.org/10.1002/rem.21668>.
- 10) Basu Dipanjan, Misra Aditi, and J. Puppala Anand, 2015, "Sustainability and Geotechnical Engineering: Perspectives and Review." *Canadian Geotechnical Journal*, June.
- 11) Basu, D., 2013. A brief overview of sustainability and its assessment in geotechnical engineering. *Proceedings of GeoMontreal*.
- 12) Basu, D., A. J. Puppala, and B. Chittoori. 2013. "General Report of TC 307, Sustainability in Geotechnical Engineering." *Proc. 18th ICSMGE*.
- 13) Basu, Dipanjan, and Mina Lee. 2018. "A Quantitative Framework for Sustainability and Resilience in Geotechnical Engineering." In *Geotechnics for Natural and Engineered Sustainable Technologies: GeoNEst*, edited by A. Murali Krishna, Arindam Dey, and S. Sreedeeep, 399–411. Singapore: Springer Singapore. https://doi.org/10.1007/978-981-10-7721-0_24.
- 14) Bavaresco N. Castellanza R., Galli A., Pettinaroli A., Lebeau M. 2023 – "Artificial ground freezing with liquid nitrogen: experimental investigation and numerical modeling" 11th International Symposium on Ground Freezing – 10-12 October 2023, London (UK) 215-223
- 15) Bavaresco N., 2023 - "Innovation applied to artificial freezing of soils: an experimental study to enhanced theoretical and numerical analysis" University Milano Bicocca - PhD in chemical, geological and environmental sciences - 36°Cycle - Thesis under submission
- 16) Benini L., Mancini L., Sala S., Manfredi S., Schau E. M., Pant R. 2014. "Normalisation Method and Data for Environmental Footprints." Publications Office of the European Union: Luxembourg. <https://www.oneplanetnetwork.org/sites/default/files/from-crm/lb-na-26842-en-n.pdf>.
- 17) Benoît, Catherine, Gregory A. Norris, Sonia Valdivia, Andreas Ciroth, Asa Moberg, Ulrike Bos, Siddharth Prakash, Cassia Ugaya, and Tabea Beck. 2010. "The Guidelines for Social Life Cycle Assessment of Products: Just in Time!" *International Journal of Life Cycle Assessment* 15 (2): 156–63. <https://doi.org/10.1007/s11367-009-0147-8>.
- 18) Bizjak, Karmen Fifer, Friderik Knez, Stanislav Lenart, and Katja Slanc. 2017. "Life-Cycle Assessment and Repair of the Railway Transition Zones of an Existing Bridge Using Geocomposite Materials." *Structure and Infrastructure Engineering: Maintenance, Management, Life-Cycle Design and Performance* 13 (3): 331–44. <https://doi.org/10.1080/15732479.2016.1158288>.
- 19) Bonviu, Florin. 2014. "The European Economy: From a Linear to a Circular Economy." *Romanian J. Eur. Aff.* 14: 78. https://heinonline.org/hol-cgi-bin/get_pdf.cgi?handle=hein.journals/rojaeuf14§ion=31.
- 20) Boulenger, Maxime. n.d. "Life Cycle Assessment of Concrete Structures Using Public Databases: Comparison of a Fictitious Bridge and Tunnel."
- 21) Božiček, David, Roman Kunič, and Mitja Košir. 2021. "Interpreting Environmental Impacts in Building Design: Application of a Comparative Assertion Method in the Context of the EPD Scheme for Building Products." *Journal of Cleaner Production* 279 (January): 123399. <https://doi.org/10.1016/j.jclepro.2020.123399>.

- 22) Brammer, Stephen, and Helen Walker. 2011. "Sustainable Procurement in the Public Sector: An International Comparative Study." *International Journal of Operations & Production Management* 31 (4): 452–76. <https://doi.org/10.1108/01443571111119551>.
- 23) Bratt, Cecilia, Sophie Hallstedt, K-H Robèrt, Göran Broman, and Jonas Oldmark. 2013. "Assessment of Criteria Development for Public Procurement from a Strategic Sustainability Perspective." *Journal of Cleaner Production* 52 (August): 309–16. <https://doi.org/10.1016/j.jclepro.2013.02.007>.
- 24) Brundtland, G.H., 1987. *Our Common Future* World Commission On Environment And Development.
- 25) Butt, A.A., Toller, S. and Birgisson, B., 2015. Life cycle assessment for the green procurement of roads: a way forward. *Journal of Cleaner Production*, 90, pp.163-170.
- 26) Butt, Ali Azhar, Susanna Toller, and Björn Birgisson. 2015. "Life Cycle Assessment for the Green Procurement of Roads: A Way Forward." *Journal of Cleaner Production* 90 (March): 163–70. <https://doi.org/10.1016/j.jclepro.2014.11.068>.
- 27) Carter, Kate, and Chris Fortune. 2007. "Sustainable Development Policy Perceptions and Practice in the UK Social Housing Sector." *Construction Management and Economics* 25 (4): 399–408. <https://doi.org/10.1080/01446190600922578>.
- 28) Celot A., Restaini A., Pettinaroli A., Caffaro P. 2023 "The construction of the new Brenner railway passage under the Isarco River protected by artificial ground freezing treatment" – 11th International Symposium on Ground Freezing – 10-12 October 2023, London (UK) 343-352
- 29) CEN, EN 15978:2011; Sustainability of Construction Works—Assessment of Environmental Performance of Buildings—Calculation Method. CEN: Brussels, Belgium, 2011.
- 30) Chang, Ilhan, Minhyeong Lee, and Gye-Chun Cho. 2019. "Global CO2 Emission-Related Geotechnical Engineering Hazards and the Mission for Sustainable Geotechnical Engineering." *Energies* 12 (13): 2567. <https://doi.org/10.3390/en12132567>.
- 31) Chester, Mikhail V., and Alex Cano. 2016. "Time-Based Life-Cycle Assessment for Environmental Policymaking: Greenhouse Gas Reduction Goals and Public Transit." *Transportation Research Part D: Transport and Environment* 43 (March): 49–58. <https://doi.org/10.1016/j.trd.2015.12.003>.
- 32) Chester, Mikhail V., and Arpad Horvath. 2009. "Environmental Assessment of Passenger Transportation Should Include Infrastructure and Supply Chains." *Environmental Research Letters: ERL [Web Site]* 4 (2): 024008. <https://doi.org/10.1088/1748-9326/4/2/024008>.
- 33) Choi, Jae-Ho. 2019. "Strategy for Reducing Carbon Dioxide Emissions from Maintenance and Rehabilitation of Highway Pavement." *Journal of Cleaner Production* 209 (February): 88–100. <https://doi.org/10.1016/j.jclepro.2018.10.226>.
- 34) Choudhury, Deepankar, G. L. Sivakumar Babu, and Ikuo Towhata. 2018. "Sustainability in Geotechnical Engineering and Related Urban Issues – Editors' Note." *Indian Geotechnical Journal* 48 (2): 205–6. <https://doi.org/10.1007/s40098-018-0320-8>.
- 35) COM(2001) 264, "A sustainable Europe for a better world: A European Union strategy for sustainable development." Communication of the Commission of the European Communities 2001.
- 36) COM(2001) 274, "Community law applicable to public procurement and the possibilities for integrating environmental considerations into public procurement" Communication of the Commission of the European Communities 2001.
- 37) COM(2003) 302, "Integrated Product Policy. Building on Environmental Life-Cycle Thinking" Communication of the Commission of the European Communities 2003.
- 38) COM(2003)302 – Communication Integrated Product Policy - Building on Environmental Life-Cycle Thinking
- 39) COM(2008) 400, "Public procurement for a better environment" Communication of the Commission of the European Communities 2009.
- 40) COM(2012) 710 final, Proposal for a Decision of the European Parliament and of the Council on a General Union Environment Action Program to 2020 'Living well, within the limits of our planet'.
- 41) COM(2014)398 – Communication - Towards a circular economy: A zero waste programme for Europe Available online: <https://www.eumonitor.eu/9353000/1/j9vvik7m1c3gyxp/vj4tamjogxb>
- 42) COM(2015)614 – Communication Closing the loop - An EU action plan for the Circular Economy Available online: <https://www.eumonitor.eu/9353000/1/j9vvik7m1c3gyxp/vjzpj6v9jiu8>
- 43) COM(2019)640 – Communication The European Green Deal
- 44) COM(2021)802 final – Directive, Energy performance of buildings (recast) Available online: <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=celex%3A52021PC0802>.
- 45) COM(96) 583, Green Paper "Public procurement in the European Union: exploring the way forward" Communication of the Commission of the European Communities 1996.
- 46) Curran, Mary Ann. 2018. "Michael Z. Hauschild, Ralph K. Rosenbaum, and Stig Irvin Olsen (eds): Life Cycle Assessment—Theory and Practice." *The International Journal of Life Cycle Assessment*. <https://doi.org/10.1007/s11367-018-1461-9>.
- 47) Curran, Mary Ann. 2018. "Michael Z. Hauschild, Ralph K. Rosenbaum, and Stig Irvin Olsen (eds): Life Cycle Assessment—Theory and Practice." *The International Journal of Life Cycle Assessment*. <https://doi.org/10.1007/s11367-018-1461-9>.
- 48) Da Rocha, C.G., Passuello, A., Consoli, N.C., Samaniego, R.A.Q. and Kanazawa, N.M., 2016. Life cycle assessment for soil stabilization dosages: A study for the Paraguayan Chaco. *Journal of cleaner production*, 139, pp.309-318.
- 49) Dalhammar, Carl. 2015. "The Application of 'life Cycle Thinking in European Environmental Law: Theory and Practice.'" *Journal for European Environmental & Planning Law* 12 (2): 97–127. https://brill.com/view/journals/jeep/12/2/article-p97_2.xml.

- 50) Dalvi, Vyas, and Sugade. n.d. "SUSTAINABILITY METRICS FOR GROUND IMPROVEMENT TECHNIQUES." Academia.edu. https://www.academia.edu/download/67347288/IJARET_12_03_015.pdf.
- 51) Dam, T.V., and Taylor, P.C. 2011. Seven principles of sustainable concrete pavements. *Concrete International*,33(11); 49-52
- 52) Damiani, Ivan P., Richard J. Bathurst, Eduard G. Adroguer, Alejandro Josa, and Antonio Lloret. 2018. "Sustainability Assessment of Earth-Retaining Wall Structures." *Environmental Geotechnics*. <https://doi.org/10.1680/jenge.16.00004>.
- 53) Damiani, Mattia, Nicola Ferrara, and Fulvio Ardenete. 2022. *Understanding Product Environmental Footprint and Organisation Environmental Footprint Methods*. Publications Office of the European Union.
- 54) De Laurentiis, Valeria, Michela Secchi, Ulrike Bos, Rafael Horn, Alexis Laurent, and Serenella Sala. 2019. "Soil Quality Index: Exploring Options for a Comprehensive Assessment of Land Use Impacts in LCA." *Journal of Cleaner Production* 215 (April): 63–74. <https://doi.org/10.1016/j.jclepro.2018.12.238>.
- 55) De Wolf Marc André, Pant Rana, Chomkham Sri Kirana, Sala Serenella, and Pennington David. 2012. *The International Reference Life Cycle Data System (ILCD) Handbook : Towards More Sustainable Production and Consumption for a Resource-Efficient Europe*. Publications Office of the European Union. <https://doi.org/10.2788/85727>.
- 56) Deamer, Luke, Jacquetta Lee, Mike Mulheron, and James De Waele. n.d. "Building Sustainability Impacts from the Bottom Up: Identifying Sustainability Impacts throughout a Geotechnical Company." <https://doi.org/10.1016/j.jclepro.2015.04.104>.
- 57) Egan, D. and Slocombe, B.C., 2010. Demonstrating environmental benefits of ground improvement. *Proceedings of the Institution of Civil Engineers-Ground Improvement*, 163(1), pp.63-69.
- 58) EPRS | European Parliamentary Research Service - Author: Guillaume Ragonnaud - Members' Research Service - PE 739.243 – December 2022.
- 59) EU - 2013/179/EU: Commission Recommendation of 9 April 2013 on the use of common methods to measure and communicate the life cycle environmental performance of products and organisations Text with EEA relevance.
- 60) EU – Green Procurement Toolkit. 2022. https://green-business.ec.europa.eu/green-public-procurement/gpp-training-toolkit_en.
- 61) European Commission Joint Research Centre Institute for Environment and Sustainability. 2010. "ILCD Handbook - General Guide for LCA - DETAILED GUIDANCE." file:///C:/Users/susani/Downloads/ILCD-Handbook-General-guide-for-LCA-DETAILED-GUIDANCE-12March2010-ISBN-fin-v1.0-EN.pdf.
- 62) EU, REGULATION (EU) 2020/852 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 18 June 2020 on the establishment of a framework to facilitate sustainable investment, and amending Regulation (EU) 2019/2088 -
- 63) European Environment Agency, Green Infrastructure and territorial cohesion. (2011). *Technical Report No 18/2011*. See also http://ec.europa.eu/environment/nature/ecosystems/docs/Green_Infrastructure.pdf
- 64) Faith-Ell, Charlotta, Berit Balfors, and Lennart Folkesson. 2006. "The Application of Environmental Requirements in Swedish Road Maintenance Contracts." *Journal of Cleaner Production* 14 (2): 163–71. <https://doi.org/10.1016/j.jclepro.2004.11.004>.
- 65) Farahani, Abolfazl, Holger Wallbaum, and Jan-Olof Dalenbäck. 2019. "The Importance of Life-Cycle Based Planning in Maintenance and Energy Renovation of Multifamily Buildings." *Sustainable Cities and Society* 44 (January): 715–25. <https://doi.org/10.1016/j.scs.2018.10.033>.
- 66) Fenner, R. A., and T. Ryce. 2008. "A Comparative Analysis of Two Building Rating Systems Part 1: Evaluation." *Proceedings of the Institution of Civil Engineers - Engineering Sustainability* 161 (1): 55–63. <https://doi.org/10.1680/ensu.2008.161.1.55>.
- 67) Ferrini, Martina, Valentina Castellani, Nadia Mirabella, Serenella Sala, Stefano Tani, and Valeria Mezzanotte. n.d. "SELECTION OF CRITERIA AND METHODS FOR A COMPARATIVE EVALUATION OF ENVIRONMENTAL SUSTAINABILITY OF OPEN- CUT AND NO-DIG TECHNOLOGIES FOR NEW INSTALLATIONS AND IN SITU REHABILITATION OF WATER PIPES."
- 68) Finnveden, G. and Moberg, Å., 2005. Environmental systems analysis tools—an overview. *Journal of cleaner production*, 13(12), pp.1165-1173.
- 69) Finnveden, Göran, Michael Z. Hauschild, Tomas Ekvall, Jeroen Guinée, Reinout Heijungs, Stefanie Hellweg, Annette Koehler, David Pennington, and Sangwon Suh. 2009. "Recent Developments in Life Cycle Assessment." *Journal of Environmental Management* 91 (1): 1–21. <https://doi.org/10.1016/j.jenvman.2009.06.018>.
- 70) Forsberg, Anna, and Fredrik von Malmberg. 2004. "Tools for Environmental Assessment of the Built Environment." *Building and Environment* 39 (2): 223–28. <https://doi.org/10.1016/j.buildenv.2003.09.004>.
- 71) Fowler, K. M., and E. M. Rauch. 2006. "Sustainable Building Rating Systems Summary." <https://www.osti.gov/servlets/purl/926974>.
- 72) Fregonara, Elena. 2020. "A Life Cycle Perspective for Infrastructure Management." *Aestimum*, 5–25. <https://doi.org/10.13128/aestim-8449>.
- 73) Fuchs, G., I. Keuning, B. R. Mante, and J. D. Bakker. 2014. "A Business Case of the Estimated Profit of Life Cycle Management Principles." In *Life-Cycle of Structural Systems: Design, Assessment, Maintenance and Management*, edited by H. Furuta, D. Frangopol, and M. Akiyama. CRC Press.
- 74) Galli A. (2023). "Permeation Grouting - Development and innovation of 1D and 3D experimental tests for the analysis of the injection processes and the influence on the mechanical resistance of the grouted soil ". (PhD thesis, Università degli Studi di Milano-Bicocca, 2023)

- 75) Gilchrist, Andrew, and Erez N. Allouche. 2005. "Quantification of Social Costs Associated with Construction Projects: State-of-the-Art Review." *Tunnelling and Underground Space Technology* 20 (1): 89–104. <https://doi.org/10.1016/j.tust.2004.04.003>.
- 76) Gluch, P. and Baumann, H., 2004. The life cycle costing (LCC) approach: a conceptual discussion of its usefulness for environmental decision-making. *Building and environment*, 39(5), pp.571-580.
- 77) Gomes Correia, A., M. G. Winter, and A. J. Puppala. 2016. "A Review of Sustainable Approaches in Transport Infrastructure Geotechnics." *Transportation Geotechnics* 7 (June): 21–28. <https://doi.org/10.1016/j.trgeo.2016.03.003>.
- 78) Gowri, K. 2004. "Green Building Rating Systems: An Overview." *ASHRAE Journal* 46 (11): 56–60. <https://search.proquest.com/openview/68a8bf3ff41f47ca52b63da2c59854cf/1?pq-origsite=gscholar&cbl=41118>.
- 79) Griffiths, Kerry, Carol Boyle, and Theunis F. P. Henning. 2018. "Beyond the Certification Badge—How Infrastructure Sustainability Rating Tools Impact on Individual, Organizational, and Industry Practice." *Sustainability: Science Practice and Policy* 10 (4): 1038. <https://doi.org/10.3390/su10041038>.
- 80) Guinée, J. B., H. A. Udo de Haes, and G. Huppes. 1993. "Quantitative Life Cycle Assessment of Products." *Journal of Cleaner Production*. [https://doi.org/10.1016/0959-6526\(93\)90027-9](https://doi.org/10.1016/0959-6526(93)90027-9).
- 81) Guinée, Jeroen B., Reinout Heijungs, Gjalte Huppes, Alessandra Zamagni, Paolo Masoni, Roberto Buonomici, Tomas Ekvall, and Tomas Rydberg. 2011. "Life Cycle Assessment: Past, Present, and Future." *Environmental Science & Technology* 45 (1): 90–96. <https://doi.org/10.1021/es101316v>.
- 82) Guinée, Jeroen B., Stefano Cucurachi, Patrik J. G. Henriksson, and Reinout Heijungs. 2018. "Digesting the Alphabet Soup of LCA." *International Journal of Life Cycle Assessment* 23 (7): 1507–11. <https://doi.org/10.1007/s11367-018-1478-0>.
- 83) Guinée, Jeroen. 2016. "Life Cycle Sustainability Assessment: What Is It and What Are Its Challenges?" *Taking Stock of Industrial Ecology*, 45–68. <https://library.oapen.org/bitstream/handle/20.500.12657/27948/1002051.pdf?sequence=1#page=65>.
- 84) Han, Jie. 2015. *Principles and Practice of Ground Improvement*. John Wiley & Sons. <https://play.google.com/store/books/details?id=JTsxBwAAQBAJ>.
- 85) Harbottle, M.J., Al-Tabbaa, A. and Evans, C.W., 2007. A comparison of the technical sustainability of in situ stabilisation/solidification with disposal to landfill. *Journal of hazardous materials*, 141(2), pp.430-440.
- 86) Hauschild, M.Z., and Huijbregts, M.A.J. (2015). In *LCA Compendium – the Complete World of Life Cycle Assessment*. Life Cycle Impact Assessment, W. Klöpffer and M.A. Curran, eds. (Springer), pp. 1–16.
- 87) Hauschild, Michael Z., Ralph K. Rosenbaum, and Stig Irving Olsen. 2017. *Life Cycle Assessment: Theory and Practice*. Springer International Publishing. <https://play.google.com/store/books/details?id=8URxAQAACAAJ>.
- 88) Heijungs, R., Settanni, E. and Guinée, J., 2013. Toward a computational structure for life cycle sustainability analysis: unifying LCA and LCC. *The International Journal of Life Cycle Assessment*, 18, pp.1722-1733.
- 89) Heijungs, Reinout, and Sangwon Suh. 2002. "The Computational Structure of Life Cycle Assessment." *Eco-Efficiency in Industry and Science*. <https://doi.org/10.1007/978-94-015-9900-9>.
- 90) Höjer, Mattias, Sofia Ahlroth, Karl-Henrik Dreborg, Tomas Ekvall, Göran Finnveden, Olof Hjelm, Elisabeth Hochschorner, Måns Nilsson, and Viveka Palm. 2008. "Scenarios in Selected Tools for Environmental Systems Analysis." *Journal of Cleaner Production* 16 (18): 1958–70. <https://doi.org/10.1016/j.jclepro.2008.01.008>.
- 91) Hojjati, A., Jefferson, I., Metje, N. and Rogers, C.D., 2017, March. Sustainability assessment for urban underground utility infrastructure projects. In *Proceedings of the Institution of Civil Engineers-Engineering Sustainability* (Vol. 171, No. 2, pp. 68-80). Thomas Telford Ltd.
- 92) Hojjati, Aryan, Ian Jefferson, Nicole Metje, and Christopher D. F. Rogers. 2017. "Embedding Sustainability Criteria into Pre-Appraisal of Underground Utility for Future Cities." *Proceedings of the Institution of Civil Engineers - Urban Design and Planning* 170 (6): 258–71. <https://doi.org/10.1680/jurdp.17.00023>.
- 93) Holt, D.G., Jefferson, I., Braithwaite, P.A. and Chapman, D.N., 2010, September. Embedding sustainability into geotechnics. Part A: Methodology. In *Proceedings of the Institution of Civil Engineers-Engineering Sustainability* (Vol. 163, No. 3, pp. 127-135). Thomas Telford Ltd.
- 94) Holt, D.G.A., 2011. Sustainable assessment for geotechnical projects (Doctoral dissertation, University of Birmingham).
- 95) Huang, Beijia, Xiangyu Wang, Harnwei Kua, Yong Geng, Raimund Bleischwitz, and Jingzheng Ren. 2018. "Construction and Demolition Waste Management in China through the 3R Principle." *Resources, Conservation and Recycling* 129 (February): 36–44. <https://doi.org/10.1016/j.resconrec.2017.09.029>.
- 96) Huang, Beijia, Xiaofeng Gao, Xiaozhen Xu, Jialing Song, Yong Geng, Joseph Sarkis, Tomer Fishman, Harnwei Kua, and Jun Nakatani. 2020. "A Life Cycle Thinking Framework to Mitigate the Environmental Impact of Building Materials." *One Earth* 3 (5): 564–73. <https://doi.org/10.1016/j.oneear.2020.10.010>.
- 97) Huang, Yue, Roger Bird, and Oliver Heidrich. 2009. "Development of a Life Cycle Assessment Tool for Construction and Maintenance of Asphalt Pavements." *Journal of Cleaner Production* 17 (2): 283–96. <https://doi.org/10.1016/j.jclepro.2008.06.005>.
- 98) Huhtala, A. 2015. "Circular Economy: A Commentary from the Perspectives of the Natural and Social Sciences." https://easac.eu/fileadmin/PDF_s/reports_statements/EASAC_Circular_Economy_Web.pdf.
- 99) Huijbregts, Mark A. J. 1998. "Application of Uncertainty and Variability in LCA." *International Journal of Life Cycle Assessment* 3 (5): 273–80. <https://link.springer.com/article/10.1007/BF02979835>.

- 100) Huijbregts, Mark A. J., Zoran J. N. Steinmann, Pieter M. F. Elshout, Gea Stam, Francesca Verones, Marisa Vieira, Michiel Zijp, Anne Hollander, and Rosalie van Zelm. 2017. "ReCiPe2016: A Harmonised Life Cycle Impact Assessment Method at Midpoint and Endpoint Level." *The International Journal of Life Cycle Assessment*. <https://doi.org/10.1007/s11367-016-1246-y>.
- 101) ICMQ. 2022. "La valutazione DNSH per le infrastrutture e il protocollo Envision", published on ICMQ website.
- 102) Iddon, Christopher R., and Steven K. Firth. 2013. "Embodied and Operational Energy for New-Build Housing: A Case Study of Construction Methods in the UK." *Energy and Buildings* 67: 479–88. <https://doi.org/10.1016/j.enbuild.2013.08.041>.
- 103) Igos, Elorri, Enrico Benetto, Rodolphe Meyer, Paul Baustert, and Benoit Othoniel. 2019. "How to Treat Uncertainties in Life Cycle Assessment Studies?" *International Journal of Life Cycle Assessment* 24 (4): 794–807. <https://doi.org/10.1007/s11367-018-1477-1>.
- 104) Institute for Sustainable Infrastructure. 2018. "Envision: Sustainable Infrastructure Framework Guidance Manual." Published by Institute for Sustainable Infrastructure, Washington, DC, www.sustainableinfrastructure.org
- 105) Interagency Working Group on the Social Cost of Greenhouse Gases (2016b, Fig. ES-1).
- 106) Intergovernmental Panel on Climate Change. 2014. "Anthropogenic and Natural Radiative Forcing." In *Climate Change 2013 – The Physical Science Basis: Working Group I Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, 659–740. Cambridge University Press. <https://doi.org/10.1017/CBO9781107415324.018>.
- 107) International Energy Agency, 2018. CO2 Emissions from Fuel Combustion 2018 Highlights [Excel file]. Available through: <https://webstore.iea.org/statistics-data>
- 108) Inyim P, Pereyra J, Bienvenu M, Mostafavi A. Environmental assessment of pavement infrastructure: A systematic review. *J Environ Manage*. 2016 Jul 1;176:128-38. doi: 10.1016/j.jenvman.2016.03.042. Epub 2016 Apr 2. PMID: 27045541.
- 109) ISO 14006:2020 Environmental management systems — Guidelines for incorporating ecodesign. Geneva, Switzerland: International Organization for Standardization.
- 110) ISO 14024:2018 Environmental labels and declarations — Type I environmental labelling — Principles and procedures. Geneva, Switzerland: International Organization for Standardization.
- 111) ISO 14025:2006 Environmental labels and declarations — Type III environmental declarations — Principles and procedures. Geneva, Switzerland: International Organization for Standardization.
- 112) ISO 14026:2017 Environmental labels and declarations — Principles, requirements and guidelines for communication of footprint information. Geneva, Switzerland: International Organization for Standardization.
- 113) ISO 14040:2006, Environmental management — Life cycle assessment — Principles and framework. Geneva, Switzerland: International Organization for Standardization.
- 114) ISO 14042:2000, Environmental management — Life cycle assessment — Life cycle impact assessment. Geneva, Switzerland: International Organization for Standardization.
- 115) ISO 14044:2006, Environmental management — Life cycle assessment — Requirements and guidelines. Geneva, Switzerland: International Organization for Standardization.
- 116) ISO 14045:2012 Environmental management — Eco-efficiency assessment of product systems — Principles, requirements and guidelines. Geneva, Switzerland: International Organization for Standardization.
- 117) ISO 14046:2014, Environmental management — Water footprint — Principles, requirements and guidelines. Geneva, Switzerland: International Organization for Standardization.
- 118) ISO 14064-3:2019 Greenhouse gases — Part 3: Specification with guidance for the verification and validation of greenhouse gas statements. Geneva, Switzerland: International Organization for Standardization.
- 119) ISO 14067:2018 Greenhouse gases — Carbon footprint of products — Requirements and guidelines for quantification. Geneva, Switzerland: International Organization for Standardization.
- 120) ISO 55000:2014, Asset management — Overview, principles and terminology. Geneva, Switzerland: International Organization for Standardization.
- 121) ISO/DIS 14068 Greenhouse gas management and climate change management and related activities — Carbon neutrality. Geneva, Switzerland: International Organization for Standardization.
- 122) ISO/TR 14047:2012, Environmental management — Life cycle assessment — Illustrative examples on how to apply ISO 14044 to impact assessment situations. Geneva, Switzerland: International Organization for Standardization.
- 123) ISO/TS 14029:2022, Environmental statements and programmes for products — Mutual recognition of environmental product declarations (EPDs) and footprint communication programmes. Geneva, Switzerland: International Organization for Standardization.
- 124) ISO/TS 14072:2014 Environmental management — Life cycle assessment — Requirements and guidelines for organizational life cycle assessment. Geneva, Switzerland: International Organization for Standardization.
- 125) IWG (Interagency Working Group) on Social Cost of Greenhouse Gases. 2016. Technical update of the social cost of carbon for regulatory im-pact analysis under executive order 12866. Washington, DC: USEPA
- 126) Jefferis, S.A., 2008. Moving towards sustainability in geotechnical engineering. In *GeoCongress 2008: Geosustainability and geohazard mitigation* (pp. 844-851).
- 127) Jefferson, I., D. V. L. Hunt, C. A. Birchall, and C. D. F. Rogers. 2007. "Sustainability Indicators for Environmental Geotechnics." *Proceedings of the Institution of Civil Engineers - Engineering Sustainability* 160 (2): 57–78. <https://doi.org/10.1680/ensu.2007.160.2.57>.

- 128) Jiang, R. and Wu, P., 2019. Estimation of environmental impacts of roads through life cycle assessment: A critical review and future directions. *Transportation Research Part D – Transport and Environment*, 77, pp. 148–163. <https://doi.org/10.1016/j.trd.2019.10.010>.
- 129) Khasreen, Mohamad Monkiz, Phillip F. G. Banfill, and Gillian F. Menzies. 2009. “Life-Cycle Assessment and the Environmental Impact of Buildings: A Review.” *Sustainability: Science Practice and Policy* 1 (3): 674–701. <https://doi.org/10.3390/su1030674>.
- 130) Kluts, Ingeborg, and Sofiia Miliutenko. 2012. “Overview of Road Infrastructure Planning Process and the Use of Environmental Assessments in the Netherlands and Sweden.” ISSN 1652-5442 TRITA-INFRA-FMS 2012:6. <http://kth.diva-portal.org/smash/get/diva2:553113/FULLTEXT01.pdf>.
- 131) Lacy, Peter, and Jakob Rutqvist. 2015. *Waste to Wealth: The Circular Economy Advantage*. Palgrave Macmillan UK. <https://play.google.com/store/books/details?id=L9sIrgEACAAJ>.
- 132) Laurent, Alexis, Bo P. Weidema, Jane Bare, Xun Liao, Danielle Maia de Souza, Massimo Pizzol, Serenella Sala, Hanna Schreiber, Nils Thonemann, and Francesca Verones. 2020. “Methodological Review and Detailed Guidance for the Life Cycle Interpretation Phase.” *Journal of Industrial Ecology* 24 (5): 986–1003. <https://doi.org/10.1111/jiec.13012>.
- 133) Lee, M. and Basu, D., 2018. An integrated approach for resilience and sustainability in geotechnical engineering. *Indian Geotechnical Journal*, 48, pp.207-234.. <https://doi.org/10.1007/s40098-018-0297-3>.
- 134) Liljenstroem, Carolina. 2021. “Life Cycle Assessment of Transport Systems and Transport Infrastructure - Investigating Methodological Approaches and Quantifying Impacts at Project and Network Levels.” KTH Royal Institute of Technology School of Architecture and the Built Environment.
- 135) Liljenström, Carolina, Sofiia Miliutenko, Helge Brattebø, and José Potting. 2013. “LICER Model Case Study Report. Application of the LICER-Model to a Swedish Road Section between Yxtatorpet and Malmköping. Report 5.1.” Report Nr 5.1. KTH Royal Institute of Technology. <https://www.researchgate.net/publication/280558025>.
- 136) Liljenström, Carolina, Susanna Toller, Jonas Åkerman, and Anna Björklund. 2019. “Annual Climate Impact and Primary Energy Use of Swedish Transport Infrastructure.” <https://journals.open.tudelft.nl/ejtir/article/view/4378/4274>.
- 137) Lloyd, Shannon M., and Robert Ries. 2008. “Characterizing, Propagating, and Analyzing Uncertainty in Life-Cycle Assessment: A Survey of Quantitative Approaches.” *Journal of Industrial Ecology* 11 (1): 161–79. <https://doi.org/10.1162/jiec.2007.1136>.
- 138) Lombardi G. 1999 “Iniezione di masse rocciose con miscele cementizie. Il concetto GIN” *Rivista Italiana di Geotecnica* 1999_2_40
- 139) Maitre-Ekern, Eléonore, Carl Dalhammar, and Hans Christian Bugge. 2018. *Preventing Environmental Damage from Products: An Analysis of the Policy and Regulatory Framework in Europe*. Cambridge University Press. <https://play.google.com/store/books/details?id=A1FSDwAAQBAJ>. De Wolf C, Yang F, Cox D, Charlson A, Hattan A S and Ochsendorf J 2016 Material quantities and embodied carbon dioxide in structures Proc. Inst. Civ. Eng.169 150–61
- 140) Marten, A.L., Kopits, E.A., Griffiths, C.W., Newbold, S.C. and Wolverton, A., 2015a. Corrigendum to: Incremental CH4 and N2O mitigation benefits consistent with the US Government's SC-CO2 estimates. *Climate Policy*, 15(5), pp.678-679.
- 141) Marten, A.L., Kopits, E.A., Griffiths, C.W., Newbold, S.C. and Wolverton, A., 2015b. Incremental CH4 and N2O mitigation benefits consistent with the US Government's SC-CO2 estimates. *Climate Policy*, 15(2), pp.272-298.
- 142) Masson-Delmotte, Valérie, Panmao Zhai, Hans-Otto Pörtner, Debra Roberts, Jim Skea, and Priyadarshi R. Shukla. 2018. “Global Warming of 1.5°C - An IPCC Special Report on the Impacts of Global Warming of 1.5°C above Pre-Industrial Levels and Related Global Greenhouse Gas Emission Pathways, in the Context of Strengthening the Global Response to the Threat of Climate Change, Sustainable Development, and Efforts to Eradicate Poverty.” Intergovernmental panel on climate change - WMO - UNEP.
- 143) Mendoza Beltram, Francesco Pomponi, J. B. Guinée, and R. Heijungs. 2018. Uncertainty Analysis in Embodied Carbon Assessments: What Are the Implications of Its Omission? In *Embodied Carbon in Buildings*. Edited by Francesco Pomponi Catherine De Wolf Alice Moncaster. Springer International Publishing. <https://doi.org/10.1007/978-3-319-72796-7>.
- 144) Meneghini, Luca. 2022. “A critical analysis of the EU green taxonomy: is it fit for purpose?” *Dirittodelrisparmio*, no. 2.
- 145) Mickovski, Slobodan B. 2021. “Sustainable Geotechnics—Theory, Practice, and Applications.” *Sustainability: Science Practice and Policy* 13 (9): 5286. <https://doi.org/10.3390/su13095286>.
- 146) Miliutenko, Sofiia. 2016. “Consideration of Life Cycle Energy Use and Greenhouse Gas Emissions for Improved Road Infrastructure Planning.” KTH Royal Institute of Technology School of Architecture and the Built Environment. <http://www.diva-portal.org/smash/get/diva2:915227/FULLTEXT01.pdf>
- 147) Mira Cattò F., Pettinaroli A., Rovetto E. (2016) “Ground freezing combined method for urban tunnel excavation”. DFI-India 2016: 6th Conference on Deep Foundation Technologies for Infrastructure Development in India IEST Shibpur - Kolkata, India
- 148) Misra, Aditi, and Dipanjan Basu. 2010. “Sustainability Metrics for Pile Foundations” 2009.
- 149) Misra, Aditi. n.d. “A Multicriteria Based Quantitative Framework for Assessing Sustainability of Pile Foundations.”
- 150) Nazir, Novizar. 2017. “Understanding Life Cycle Thinking and Its Practical Application to Agri-Food System.” *International Journal on Advanced Science Engineering Information Technology* 7 (5): 1861–70. <https://doi.org/10.18517/ijaseit.7.5.3578>.
- 151) Nellemann, Christian. 2010. “Dead Planet, Living Planet. A UNEP Rapid Response Assessment.” <https://www.researchgate.net/publication/304215826>.

- 152) Neugebauer, S., Martínez-Blanco, J., Scheumann, R. and Finkbeiner, M., 2015. Enhancing the practical implementation of life cycle sustainability assessment—proposal of a Tiered approach. *Journal of Cleaner Production*, 102, pp.165-176.
- 153) Newman L., Bent A., Harbicht T., Newman G. 2023 – “World’s largest bulk ground freezing program at Cameco’s Cigar lake uranium mine, Canada” 11th International Symposium on Ground Freezing – 10-12 October 2023, London (UK) 103-111
- 154) Parra, C., V. González-Prida, E. Candón, la Fuente A., P. Martínez-Galán, and A. Crespo. 2020. “Integration of Asset Management Standard ISO55000 with a Maintenance Management Model.” In 14th WCEAM Proceedings (WCEAM: World Congress on Engineering Asset Management). Springer. https://doi.org/10.1007/978-3-030-64228-0_17.
- 155) Passer, Alexander, Sébastien Lasvaux, Karen Allacker, Dieter De Lathauwer, Carolin Spirinckx, Bastian Wittstock, Daniel Kellenberger, Florian Gschösser, Johannes Wall, and Holger Wallbaum. 2015. “Environmental Product Declarations Entering the Building Sector: Critical Reflections Based on 5 to 10 Years Experience in Different European Countries.” *International Journal of Life Cycle Assessment* 20 (9): 1199–1212. <https://doi.org/10.1007/s11367-015-0926-3>.
- 156) Paulsen, Jacob. 2001. “Life Cycle Assessment for Building Products-The Significance of the Usage Phase.” KTH, Building Sciences and Engineering, Stockholm, Sweden.
- 157) Pettinaroli A., Caffaro P, Lodico M., Carretucci A. (2019) “The technical management of the permeation grouting works in the execution of the new Metro Line 4 in Milan”. World Tunnel Congress 2019 – Naples, Italy
- 158) Pettinaroli, A., Susani, S., Castellanza, R., Collina, E., Pierani, M., Paoli, R., Romagnoli, F. A sustainability-based approach for geotechnical infrastructure. 2023. Paper submitted.
- 159) Pettinaroli, A., Susani, S., Castellanza, R., Collina, E., Pierani, M., Paoli, R., Romagnoli, F. The impact of a permeation grouting technique quantitatively assessed through a process focused life cycle assessment. 2023. paper submitted.
- 160) Pittenger, D., Gransberg, D.D., Zaman, M. and Riemer, C., 2011. Life-cycle cost-based pavement preservation treatment design. *Transportation research record*, 2235(1), pp.28-35.
- 161) Praticò, F., Saride, S. and Puppala, A.J., 2011. Comprehensive life-cycle cost analysis for selection of stabilization alternatives for better performance of low-volume roads. *Transportation research record*, 2204(1), pp.120-129.
- 162) PRé Consultants 2016. *SimaPro Database – Manual Methods Library*.
- 163) PRé Consultants, B. V. n.d. 2022. “SimaPro 9 User’s Manual.” Utrecht, The Netherlands.
- 164) PRé Consultants, B. V. n.d. 2022. “SimaPro Database Manual Methods Library.” Utrecht, The Netherlands.
- 165) Purdy, Christopher M., Alena J. Raymond, Jason T. DeJong, Alissa Kendall, Christopher Krage, and Jamie Sharp. 2022. “Life-Cycle Sustainability Assessment of Geotechnical Site Investigation.” *Canadian Geotechnical Journal* 59 (6): 863–77. <https://doi.org/10.1139/cgj-2020-0523>.
- 166) Rangelov, Milena, Heather Dylla, Amlan Mukherjee, and Nadarajah Sivaneswaran. 2020. “Use of Environmental Product Declarations (EPDs) of Pavement Materials in the United States of America (U.S.A.) to Ensure Environmental Impact Reductions.” *Journal of Cleaner Production*. <https://doi.org/10.1016/j.jclepro.2020.124619>.
- 167) Rangelov, Milena, Heather Dylla, and Nadarajah Sivaneswaran. 2021. “Using Environmental Product Declarations for Green Public Procurement and Life Cycle Assessment of Concrete Pavements.” In 12th International Conference on Concrete Pavements. <https://doi.org/10.33593/8ziapl8i>.
- 168) Raymond Alena J., DeJong Jason T., Kendall Alissa, Blackburn J. Tanner, and Deschamps Rick. 2021. “Life Cycle Sustainability Assessment of Geotechnical Ground Improvement Methods.” *Journal of Geotechnical and Geoenvironmental Engineering* 147 (12): 04021161. [https://doi.org/10.1061/\(ASCE\)GT.1943-5606.0002646](https://doi.org/10.1061/(ASCE)GT.1943-5606.0002646).
- 169) Raymond, Alena J., James R. Tipton, Alissa Kendall, and Jason T. DeJong. 2020. “Review of Impact Categories and Environmental Indicators for Life Cycle Assessment of Geotechnical Systems.” *Journal of Industrial Ecology* 24 (3): 485–99. <https://doi.org/10.1111/jiec.12946>.
- 170) Rebitzer, G., T. Ekvall, R. Frischknecht, D. Hunkeler, G. Norris, T. Rydberg, W-P Schmidt, S. Suh, B. P. Weidema, and D. W. Pennington. 2004. “Life Cycle Assessment.” *Environment International*. <https://doi.org/10.1016/j.envint.2003.11.005>.
- 171) Reddy, and Giri. n.d. “Assessing Sustainability of Ground Improvement Methods: Quantitative Triple Bottom Line Framework and Case Study.” *Conservation & Sustenance* 28-30 October ... https://www.academia.edu/download/43291321/INDECS-15_PROCEEDINGS.pdf#page=47.
- 172) Rieckhof, Ramona. 2017. “The Life Cycle Metaphor: Its Emergence, Understanding, and Conceptualisation in Business Research.” *Uwf UmweltWirtschaftsForum* 25 (1): 91–107. <https://doi.org/10.1007/s00550-017-0455-6>.
- 173) Samuelsson, I., S. Larsson, and J. Spross. 2021. “Life Cycle Assessment and Life Cycle Cost Analysis for Geotechnical Engineering: Review and Research Gaps.” *IOP Conference Series: Earth and Environmental Science* 710 (1): 012031. <https://doi.org/10.1088/1755-1315/710/1/012031>.
- 174) Santero, Nicholas. 2010. “Life Cycle Assessment of Pavements: A Critical Review of Existing Literature and Research.” <https://escholarship.org/uc/item/8632v9cc>.
- 175) Saxe, Shoshanna, and Dena Kasraian. 2020. “Rethinking Environmental LCA Life Stages for Transport Infrastructure to Facilitate Holistic Assessment.” *Journal of Industrial Ecology* 24 (5): 1031–46. <https://doi.org/10.1111/jiec.13010>.
- 176) Shah, Janvi, Ian Jefferson, and Dexter Hunt. 2014. “Resilience Assessment for Geotechnical Infrastructure Assets.” *Infrastructure Asset Management* 1 (4): 95–104. <https://doi.org/10.1680/iasma.14.00007>.
- 177) Shillaber C. M., Mitchell J. K., Dove J. E., Ostrum Z. A. (2017) “Frame work to account for uncertainty in energy and carbon assessmentof ground improvement works.” *J Geotech Geoenviron* 143(5): 1–12

- 178) Shillaber C. M., Pearce A. R., Mitchell J. K., Dove J. E. (2016) "Uncertainty in the estimates of embodied energy and CO2 emissions for ground improvement: the influence of material haul distance." In *Geo-Chicago 2016: Sustainability and Resiliency in Geotechnical Engineering*, GSP269, American Society of Civil Engineering, Orlando, pp 722–731
- 179) Shillaber C. M., Mitchell J. K., Dove J. E. (2015) "Energy and carbon assessment of ground improvement works. II: working model and example." *J Geotech Geoenviron* 142(3): 1–11
- 180) Simonen, Kathrina. 2014. *Life Cycle Assessment*. Routledge. <https://play.google.com/store/books/details?id=zwlgAwAAQBAJ>.
- 181) Soma H. 2023 – "Artificial ground freezing method using liquefied CO2 as refrigerant" - 11th International Symposium on Ground Freezing – 10-12 October 2023, London (UK) 85-92
- 182) Soust-Verdaguer, B.; Palumbo, E.; Llatas, C.; Velasco Acevedo, Á.; Fernández Galvéz, M.D.; Hoxha, E.; Passer, A. The Use of Environmental Product Declarations of Construction Products as a Data Source to Conduct a Building Life-Cycle Assessment in Spain. *Sustainability* 2023, 15, 1284. <https://doi.org/10.3390/su15021284>
- 183) Spaulding, C., Masse, F. and LaBrozzi, J., 2008. Ground improvement technologies for a sustainable world. *Civil Engineering Magazine Archive*, 78(4), pp.54-59.
- 184) Spross, J., Olsson, L., Stille, H., Hintze, S. and Båtelsson, O., 2022. Risk management procedure to understand and interpret the geotechnical context. *Georisk: Assessment and Management of Risk for Engineered Systems and Geohazards*, 16(2), pp.235-250.
- 185) Stripple Håkan, Fridell Erik, and Hulda Winnes. 2016. "Port Infrastructures in a System Perspective: A Part of the Project Environmental Calculations for Transport Infrastructure." IVL Rapport B, no. 128. <https://trid.trb.org/view/1506472>.
- 186) Sugade, Omkar, Rupa Dalvi, and Gayatri Vyas. 2019. "Sustainability Metrics for Ground Improvement Techniques." *SSRN Electronic Journal*. <https://doi.org/10.2139/ssrn.3375678>.
- 187) Susani S., 2023 – "Advanced in assessing the sustainability of geotechnical ground improvement processes" University Milano Bicocca – Executive PhD in chemical, geological and environmental sciences - 36°Cycle - Thesis under submission
- 188) Susani, S., Pettinaroli, A., Castellanza, R., Collina, E., Pierani, M., Paoli, R., Romagnoli, F. An LCA-based methodological approach to assess the sustainability of geotechnical construction processes. 2023. paper in submission.
- 189) Testa, Francesco, Paolo Grappio, Natalia Marzia Gusmerotti, and Marco Frey. 2016. "Examining Green Public Procurement Using Content Analysis: Existing Difficulties for Procurers and Useful Recommendations." *Environment, Development and Sustainability* 18: 197–219. <https://doi.org/10.1007/s10668-015-9634-1>.
- 190) Toller, S., and M. Larsson. 2017. "Implementation of Life Cycle Thinking in Planning and Procurement at the Swedish Transport Administration." In *Pavement Life-Cycle Assessment*, edited by Imad L. Al-Qadi, Hasan Ozer, John Harvey. Taylor and Francis.
- 191) Tornaghi R. and Pettinaroli A. Design and control criteria of jet grouting treatments. ASEP-GI 2004 ASEP-GI 2004 International Symposium on Ground Improvement - Ecole Nationale des Ponts et Chaussées – Paris pp. 295-319
- 192) United Nations Environment Programme. 2010. *Guidelines for Social Life Cycle Assessment of Products*. Genève, Switzerland: United Nations Environment Programme.
- 193) USEPA. 2021. "The social cost of carbon: Estimating the benefits of reducing greenhouse gas emissions."
- 194) Usman K. - Understanding the Product Environmental Footprint (PEF) – ICAC Vol. 76 Num.2, Dec 2022
- 195) Vieira, Castorina S. n.d. "Sustainability in Geotechnics through the Use of Environmentally Friendly Materials." <https://doi.org/10.3390/su14031155>.
- 196) Vieira, Castorina Silva. 2022. *Sustainability in Geotechnics: The Use of Environmentally Friendly Materials*. MDPI AG. <https://play.google.com/store/books/details?id=7PkEzweACAAJ>.
- 197) Zamagni, Alessandra, Hanna-Leena Pesonen, and Thomas Swarr. 2013. "From LCA to Life Cycle Sustainability Assessment: Concept, Practice and Future Directions." *International Journal of Life Cycle Assessment* 18 (9): 1637–41. <https://doi.org/10.1007/s11367-013-0648-3>.
- 198) Zampori, L., and R. Pant. 2019. *Suggestions for Updating the Product Environmental Footprint (PEF) Method*. European Commission, Joint Research Centre, Publication Office. <https://data.europa.eu/doi/10.2760/424613>.

17 Appendix 1: Assessing sustainability qualitatively - DATA

17.1 Qualitative assessment for the permeation grouting technique

The radar diagram shows how the best ratings tend to be focused on resource allocation, climate, and resilience

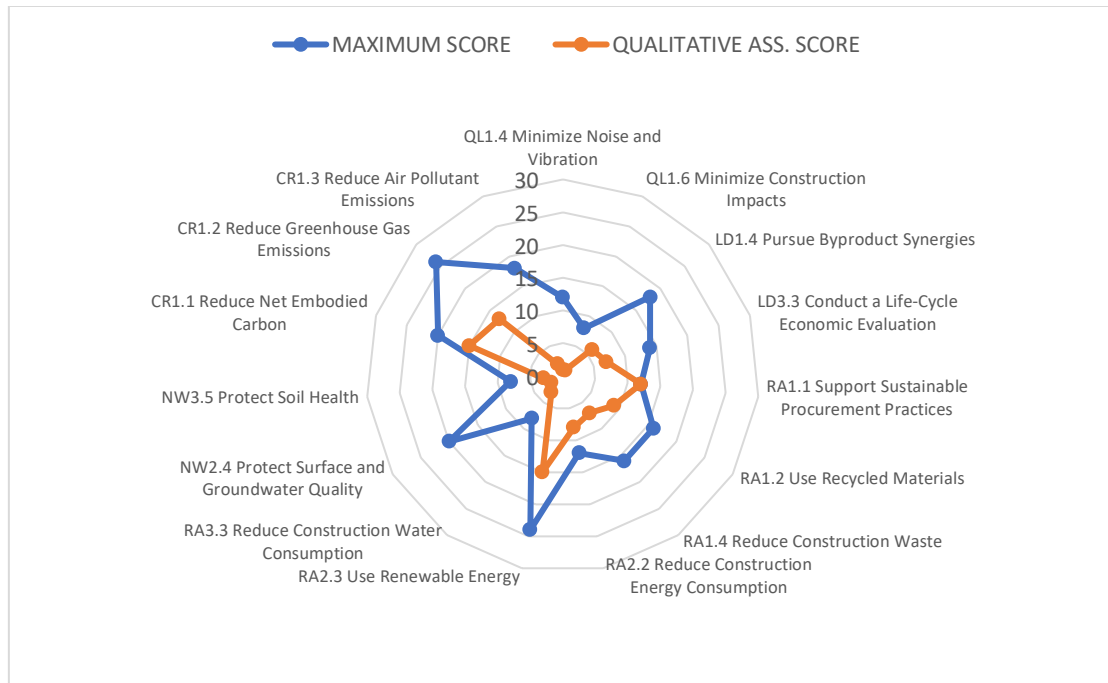


Fig. 17-1, Permeation grouting technique. Diagram of score contribution vs. each Envision indicator (Maximum achievable and qualitative score).

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX
QL1.4 Minimize Noise and vibration	QUALITY OF WELLBEING	LIFE: The extent that operational noise and vibration is assessed and mitigated, and target levels achieved.	The project team assesses the potential for operational noise impacts on the surrounding community and/or environment. This assessment occurs when applicable vibrations are considered as a potential source of noise and/or disruption.	1	8%	12
QL1.6 Minimize Construction Impacts	QUALITY OF WELLBEING	LIFE: Extent of issues addressed through construction management plans.	The project team implements a construction management plan or policies to address the temporary inconveniences associated with construction. The plan or policies are informed by stakeholder engagement.	1	13%	8
LD1.4 Pursue Byproduct Synergies	LEADERSHIP: COLLABORATION	The extent to which the project team works with external groups to find beneficial use of waste, excess resources, or capacity.	Candidates for byproduct synergies or reuse are identified. This can include finding a beneficial reuse for the project's waste or excess resources, or the project's beneficial reuse of external waste or excess resources. Project teams should also consider ecosystem services where project waste or excess resources can support natural systems, or where natural systems can process and remove project waste. The project team demonstrates an active attempt to incorporate at least one byproduct synergy or reuse into the project.	6	33%	18
LD3.3 Conduct a Life-Cycle Economic Evaluation	LEADERSHIP: ECONOMY	The comprehensiveness of the economic analyses used to determine the net impacts of the project, and their use in assessing alternatives to inform decision making.	LCCA is used to compare and assess alternatives for at least one major design component.	7	50%	14
RA1.1 Support Sustainable Procurement Practices	RESOURCE MATERIALS	ALLOCATION: The extent of sustainable procurement programs, and the percentage of materials sourced from manufacturers and/or suppliers that implement sustainable practices.	At least 50% of all project materials, supplies, and equipment meet the sustainable procurement policy/program requirements.	12	100%	12
RA1.2 Use Recycled Materials	RESOURCE MATERIALS	ALLOCATION: Percentage of project materials that are reused or recycled. Plants, soil, rock, and water are not included in this credit.	At least 25% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials.	9	56%	16
RA1.4 Reduce Construction Waste	RESOURCE MATERIALS	ALLOCATION: Percentage of total waste diverted from disposal.	The project team sets a target goal for construction waste diversion. During construction at least 25% of waste materials are recycled, reused, and/or salvaged. Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse.	7	44%	16
RA2.2 Reduce Construction Energy Consumption	RESOURCE ENERGY	ALLOCATION: The number of strategies implemented on the project during construction that reduce energy consumption and emissions.	The project implements, or has written requirements to implement, at least four (4) energy reduction strategies.	8	67%	12
RA2.3 Use Renewable Energy	RESOURCE ENERGY	ALLOCATION: Extent to which renewable energy sources are incorporated.	The project meets: 30% of energy needs (electricity and fuel) from renewable sources.	15	63%	24
RA3.3 Reduce Construction Water Consumption	RESOURCE WATER	ALLOCATION: The number of strategies implemented during construction that reduce potable water consumption.	At least three (3) potable water conservation strategies are implemented.	3	38%	8
NW2.4 Protect Surface and Groundwater Quality	NATURAL CONSERVATION	WORLD: Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	(I) The project team determines potential impacts to surface water or groundwater quality, including temperature, during construction and operations. (II) The project includes spill and leak diversion systems, spill prevention plans, and cleanup. The project does not create new direct pathways for surface water and/or groundwater contamination such as: (a) Direct runoff into karst terrain; (b) Untreated industrial or chemical discharge to	2	10%	20

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX
			unlined industrial ponds or lakes; (c) Reinjection water wells unless water is treated to secondary levels, or local regulations, whichever is more stringent; (d) or Chemical, byproduct, or fracking water, injection.			
NW3.5 Protect Health	Soil	NATURAL ECOLOGY	WORLD: Degree to which the disruption of soil health has been minimized and restored.	3	38%	8
CR1.1 Reduce Embodied Carbon	Net	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in net embodied carbon of materials.	15	75%	20
CR1.2 Greenhouse Emissions	Reduce Gas	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in operational greenhouse gas emissions.	13	50%	26
CR1.3 Reduce Pollutant Emissions	Air	CLIMATE AND RESILIENCE: EMISSIONS	Reduction of air pollutants ompared to baseline.	2	11%	18
				104	45%	232

Tab. 17-1, Permeation Grouting Technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.

The indicators that scored more than 50% of the maximum admitted total are:

- LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).
- RA1.1 Support Sustainable Procurement Practices (100%).
- RA1.2 Use Recycled Materials (56%).
- RA2.2 Reduce Construction Energy Consumption (67%).
- RA2.3 Use Renewable Energy (63%).
- CR1.1 Reduce Net Embodied Carbon (75%).
- CR1.2 Reduce Greenhouse Gas Emissions (69%).

The indicators that scored between 20% and 49% of the maximum admitted total are:

- LD1.4 Pursue Byproduct Synergies (33%).
- RA1.4 Reduce Construction Waste (44%).
- RA3.3 Reduce Construction Water Consumption (38%).
- NW3.5 Protect Soil Health (38%).

The indicators that scored less than 19% of the maximum admitted total are:

- QL1.4 Minimize Noise and Vibration (8%).
- QL1.6 Minimize Construction Impacts (13%).
- NW2.4 Protect Surface and Groundwater Quality (10%).
- CR1.3 Reduce Air Pollutant Emissions (11%).

Compared to a maximum reachable of 232 points, this ground improvement process scored 107 points (which means an overall value of 47%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a 'gold' rating following Envision rating scale).

17.2 Qualitative assessment for the single fluid jet grouting technique

The radar diagram illustrates that the highest ratings are predominantly centered around resource allocation, climate and resilience.

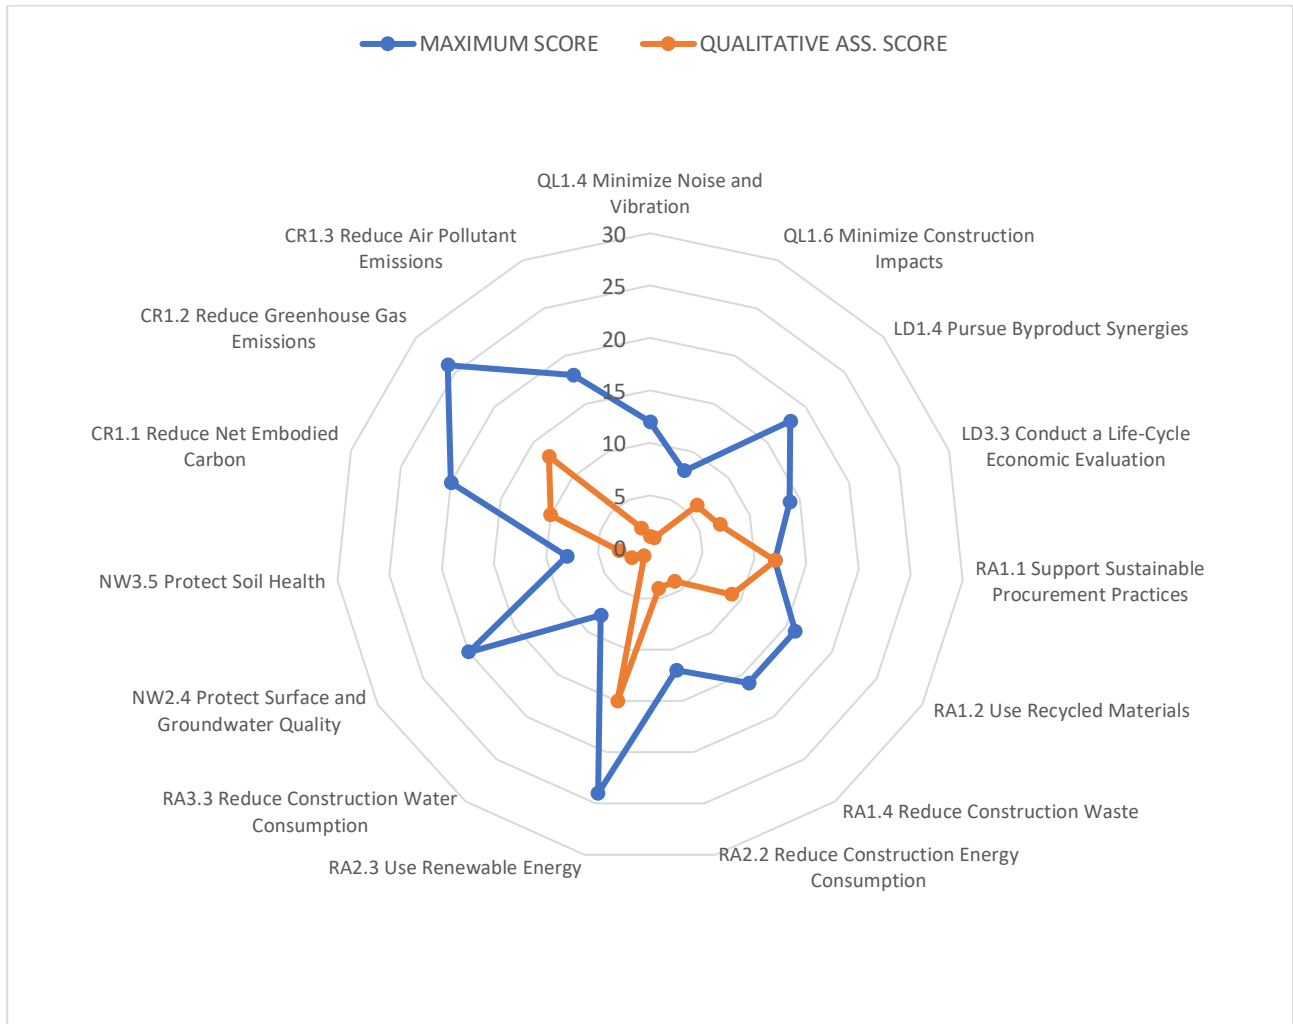


Fig. 17-2, Single fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX	
QL1.4 Noise and vibration	Minimize	QUALITY OF WELLBEING	LIFE: The extent that operational noise and vibration is assessed and mitigated, and target levels achieved.	The project team assesses the potential for operational noise impacts on the surrounding community and/or environment. This assessment occurs when applicable vibrations are considered as a potential source of noise and/or disruption.	1	8%	12
QL1.6 Construction impacts	Minimize	QUALITY OF WELLBEING	LIFE: Extent of issues addressed through construction management plans.	The project team implements a construction management plan or policies to address the temporary inconveniences associated with construction. The plan or policies are informed by stakeholder engagement.	1	13%	8
LD1.4 Byproduct Synergies	Pursue	LEADERSHIP: COLLABORATION	The extent to which the project team works with external groups to find beneficial use of waste, excess resources, or capacity.	The project team demonstrates an active attempt to incorporate at least one byproduct synergy or reuse into the project.	6	33%	18
LD3.3 Conduct a Life-Cycle Economic Evaluation		LEADERSHIP: ECONOMY	The comprehensiveness of the economic analyses used to determine the net impacts of the project, and their use in assessing alternatives to inform decision making.	LCCA is used to compare and assess alternatives for at least one major design component .	7	50%	14
RA1.1 Sustainable Procurement Practices	Support	RESOURCE MATERIALS	ALLOCATION: The extent of sustainable procurement programs, and the percentage of materials sourced from manufacturers and/or suppliers that implement sustainable practices.	At least 50% of all project materials, supplies, and equipment meet the sustainable procurement policy/program requirements.	12	100%	12
RA1.2 Use Recycled Materials	Reduce	RESOURCE MATERIALS	ALLOCATION: Percentage of project materials that are reused or recycled. Plants, soil, rock, and water are not included in this credit.	At least 25% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials.	9	56%	16
RA1.4 Construction Waste	Reduce	RESOURCE MATERIALS	ALLOCATION: Percentage of total waste diverted from disposal.	Implement a construction waste management plan that, at a minimum, identifies the materials to be diverted from disposal and whether the materials will be sorted on site or commingled. During construction at least 25% of waste materials are recycled, reused, and/or salvaged . Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse.	4	25%	16
RA2.2 Construction Energy Consumption	Reduce	RESOURCE ENERGY	ALLOCATION: The number of strategies implemented on the project during construction that reduce energy consumption and emissions.	The project implements, or has written requirements to implement, at least two (2) energy reduction strategies .	4	33%	12
RA2.3 Use Renewable Energy		RESOURCE ENERGY	ALLOCATION: Extent to which renewable energy sources are incorporated.	The project meets: 30% of energy needs (electricity and fuel) from renewable sources .	15	63%	24
RA3.3 Construction Water Consumption	Reduce	RESOURCE WATER	ALLOCATION: The number of strategies implemented during construction that reduce potable water consumption.	The project team conducts one or more planning reviews to identify and analyze options for reducing water consumption during construction. At least one (1) potable water conservation strategy is implemented .	1	13%	8
NW2.4 Surface and Groundwater Quality	Protect	NATURAL CONSERVATION	WORLD: Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	(I) The project team determines potential impacts to surface water or groundwater quality, including temperature, during construction and operations. (II) The project includes spill and leak diversion systems, spill prevention plans, and cleanup. The project does not create new direct pathways for surface water and/or groundwater contamination such as: (i) Direct runoff into karst terrain; (ii) Untreated industrial or chemical discharge to unlined industrial ponds or lakes; (iii) ReInjection water wells	2	10%	20

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX	
			unless water is treated to secondary levels, or local regulations, whichever is more stringent; or Chemical, byproduct, or fracking water, injection.				
NW3.5 Protect Health	Soil	NATURAL ECOLOGY	WORLD: Degree to which the disruption of soil health has been minimized and restored.	100% of post-construction vegetated areas disturbed during construction are restored for appropriate soil type, structure, and function to support healthy plant and tree growth.	3	38%	8
CR1.1 Embodied Carbon	Reduce Net	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in net embodied carbon of materials.	Embodied carbon is calculated, or acquired by a validated source. Calculations include: Embodied carbon of production, including raw material extraction, refinement, and manufacture. Embodied carbon of transporting materials to the project site. The replacement, repair, or refurbishment of materials over the life of the project. The project team demonstrates at least a 5% reduction in total embodied carbon of materials over the life of the project compared to the baseline. Calculations should be in tons CO ₂ .	10	50%	20
CR1.2 Greenhouse Emissions	Reduce Gas	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in operational greenhouse gas emissions.	(I) The project team demonstrates at least a 25% reduction in total CO₂eq over the operational life of the project compared to the baseline. Calculations should be in tons CO ₂ eq. (II) The project team maps and calculates the total annual greenhouse gas emissions of the final project design for reporting purposes. This includes direct and indirect greenhouse gas emissions and sequestration associated with project operations. Calculations must be in CO ₂ eq.	13	50%	26
CR1.3 Pollutant Emissions	Reduce Air	CLIMATE AND RESILIENCE: EMISSIONS	Reduction of air pollutants ompared to baseline.	(I) The project meets all applicable air quality standards and regulations for air pollutants. (II) The project implements strategies to reduce air pollutant emissions during operations.	2	11%	18
				90	39%	232	

Tab. 17-2, Single Fluid Jet Grouting technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.

The indicators that scored more than 50% of the maximum admitted total are:

- LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).
- RA1.1 Support Sustainable Procurement Practices (100%).
- RA1.2 Use Recycled Materials (56%).
- RA2.3 Use Renewable Energy (63%).
- CR1.1 Reduce Net Embodied Carbon (50%).
- CR1.2 Reduce Greenhouse Gas Emissions (50%).

The indicators that scored between 20% and 49% of the maximum admitted total are:

- LD1.4 Pursue Byproduct Synergies (33%).
- RA1.4 Reduce Construction Waste (25%).
- RA2.2 Reduce Construction Energy Consumption (33%).
- NW3.5 Protect Soil Health (38%).

The indicators that scored less than 19% of the maximum admitted total are:

- QL1.4 Minimize Noise and Vibration (8%).
- QL1.6 Minimize Construction Impacts (13%).
- NW2.4 Protect Surface and Groundwater Quality (10%).
- CR1.3 Reduce Air Pollutant Emissions (11%).
- RA3.3 Reduce Construction Water Consumption (13%).

Compared to a maximum reachable of 232 points, this ground improvement process scored 90 points (which means an overall value of 39%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a 'silver' rating following Envision rating scale).

17.3 Qualitative assessment for the double fluid jet grouting technique

The radar graphic highlights the concentration of top ratings in the domains of resource allocation, and climate and resilience.

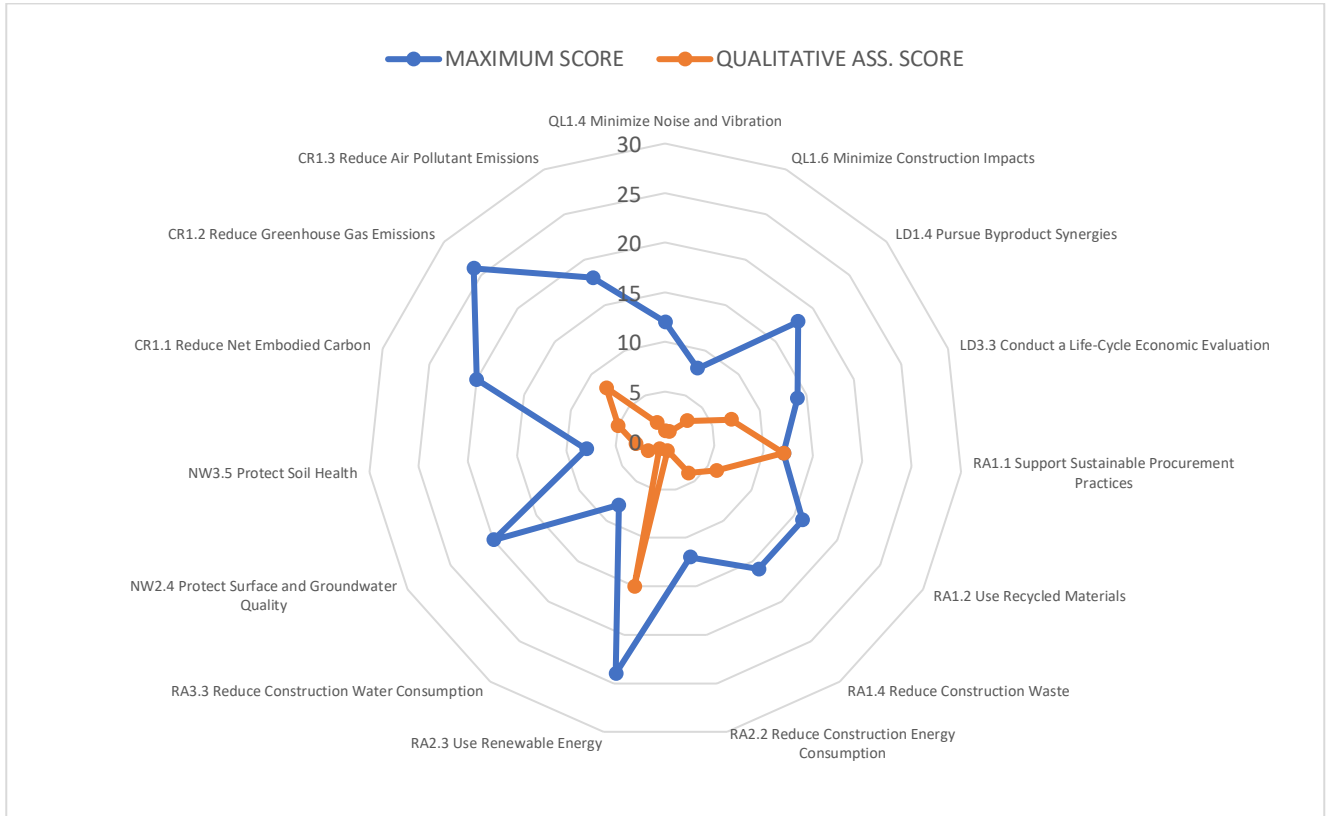


Fig. 17-3, Double fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX
QL1.4 Minimize Noise and vibration	QUALITY OF WELLBEING	LIFE: The extent that operational noise and vibration is assessed and mitigated, and target levels achieved.	The project team assesses the potential for operational noise impacts on the surrounding community and/or environment. This assessment occurs when applicable vibrations are considered as a potential source of noise and/or disruption.	1	8%	12
QL1.6 Minimize Construction Impacts	QUALITY OF WELLBEING	LIFE: Extent of issues addressed through construction management plans.	The project team implements a construction management plan or policies to address the temporary inconveniences associated with construction. The plan or policies are informed by stakeholder engagement.	1	13%	8
LD1.4 Pursue Byproduct Synergies	LEADERSHIP: COLLABORATION	The extent to which the project team works with external groups to find beneficial use of waste, excess resources, or capacity.	The project team conducts an assessment of the availability and viability of excess resources (i.e., waste) or capacity, including but not limited to waste materials, heating or cooling, financial capacity, land area/space, or management/personnel capacity.	3	17%	18
LD3.3 Conduct a Life-Cycle Economic Evaluation	LEADERSHIP: ECONOMY	The comprehensiveness of the economic analyses used to determine the net impacts of the project, and their use in assessing alternatives to inform decision making.	LCCA is used to compare and assess alternatives for at least one major design component .	7	50%	14
RA1.1 Support Sustainable Procurement Practices	RESOURCE ALLOCATION: MATERIALS	The extent of sustainable procurement programs, and the percentage of materials sourced from manufacturers and/or suppliers that implement sustainable practices.	At least 50% of all project materials , supplies, and equipment meet the sustainable procurement policy/program requirements.	12	100%	12
RA1.2 Use Recycled Materials	RESOURCE ALLOCATION: MATERIALS	Percentage of project materials that are reused or recycled. Plants, soil, rock, and water are not included in this credit.	At least 15% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials.	6	38%	16
RA1.4 Reduce Construction Waste	RESOURCE ALLOCATION: MATERIALS	Percentage of total waste diverted from disposal.	The project team sets a target goal for construction waste diversion. During construction at least 25% of waste materials are recycled, reused, and/or salvaged . Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse.	4	25%	16
RA2.2 Reduce Construction Energy Consumption	RESOURCE ENERGY	ALLOCATION: The number of strategies implemented on the project during construction that reduce energy consumption and emissions.	The project team conducts one or more planning reviews to identify and analyze options for reducing energy consumption during construction.	1	8%	12
RA2.3 Use Renewable Energy	RESOURCE ENERGY	ALLOCATION: Extent to which renewable energy sources are incorporated.	The project meets: 30% of energy needs (electricity and fuel) from renewable sources .	15	63%	24
RA3.3 Reduce Construction Water Consumption	RESOURCE WATER	ALLOCATION: The number of strategies implemented during construction that reduce potable water consumption.	At least one (1) potable water conservation strategy is implemented.	1	13%	8
NW2.4 Protect Surface and Groundwater Quality	NATURAL CONSERVATION	WORLD: Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	(I) The project team determines potential impacts to surface water or groundwater quality, including temperature, during construction and operations. (II) The project includes spill and leak diversion systems, spill prevention plans, and cleanup. The project does not create new direct pathways for surface water and/or groundwater contamination such as: (a) Direct runoff into karst terrain; (b) Untreated industrial or chemical discharge to unlined industrial ponds or lakes; (c) Re-injection water wells unless water is treated to secondary levels, or local regulations, whichever is more stringent; (d) or Chemical, byproduct, or fracking water, injection.	2	10%	20

PhD Thesis:
 Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX	
NW3.5 Protect Health	Soil	NATURAL ECOLOGY	WORLD: Degree to which the disruption of soil health has been minimized and restored.	100% of post-construction vegetated areas disturbed during construction are restored for appropriate soil type, structure, and function to support healthy plant and tree growth.	3	38%	8
CR1.1 Reduce Embodied Carbon	Net	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in net embodied carbon of materials.	The project team demonstrates at least a 5% reduction in total embodied carbon of materials over the life of the project compared to the baseline. Calculations should be in tons CO2.	5	25%	20
CR1.2 Greenhouse Emissions	Reduce Gas	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in operational greenhouse gas emissions.	(I)The project team demonstrates at least a 10% reduction in total CO2eq over the operational life of the project compared to the baseline. Calculations should be in tons CO2eq. (II) The project team maps and calculates the total annual greenhouse gas emissions of the final project design for reporting purposes. This includes direct and indirect greenhouse gas emissions and sequestration associated with project operations. Calculations must be in CO2eq."	8	31%	26
CR1.3 Reduce Pollutant Emissions	Air	CLIMATE AND RESILIENCE: EMISSIONS	Reduction of air pollutants ompared to baseline.	(I) The project meets all applicable air quality standards and regulations for air pollutants. (II) The project implements strategies to reduce air pollutant emissions during operations.	2	11%	18
				71	31%	232	

Tab. 17-3, Double Fluid Jet Grouting technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.

The indicators that scored more than 50% of the maximum admitted total are:

- LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).
- RA1.1 Support Sustainable Procurement Practices (100%).
- RA2.3 Use Renewable Energy (63%).

The indicators that scored between 20% and 49% of the maximum admitted total are:

- RA1.2 Use Recycled Materials (38%).
- RA1.4 Reduce Construction Waste (25%).
- NW3.5 Protect Soil Health (38%).
- CR1.1 Reduce Net Embodied Carbon (25%).
- CR1.2 Reduce Greenhouse Gas Emissions (31%).

The indicators that scored less than 19% of the maximum admitted total are:

- LD1.4 Pursue Byproduct Synergies (17%).
- QL1.4 Minimize Noise and Vibration (8%).
- QL1.6 Minimize Construction Impacts (13%).
- RA2.2 Reduce Construction Energy Consumption (8%).
- RA3.3 Reduce Construction Water Consumption (13%).
- NW2.4 Protect Surface and Groundwater Quality (10%).
- CR1.3 Reduce Air Pollutant Emissions (11%).

Compared to a maximum reachable of 232 points, this ground improvement process scored 71 points (which means an overall value of 31%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a 'silver' rating following Envision rating scale).

17.4 Qualitative assessment for the brine ground freezing technique

In this scenario, the strategy for bettering the earth entirely shifts, and we begin working on freezing the ground instead. A summary of the ratings can be seen below in the table as well as in the radar diagram. The radar diagram, in particular, demonstrates how the highest ratings are often concentrated in the areas of resource allocation as well as climate and resilience.

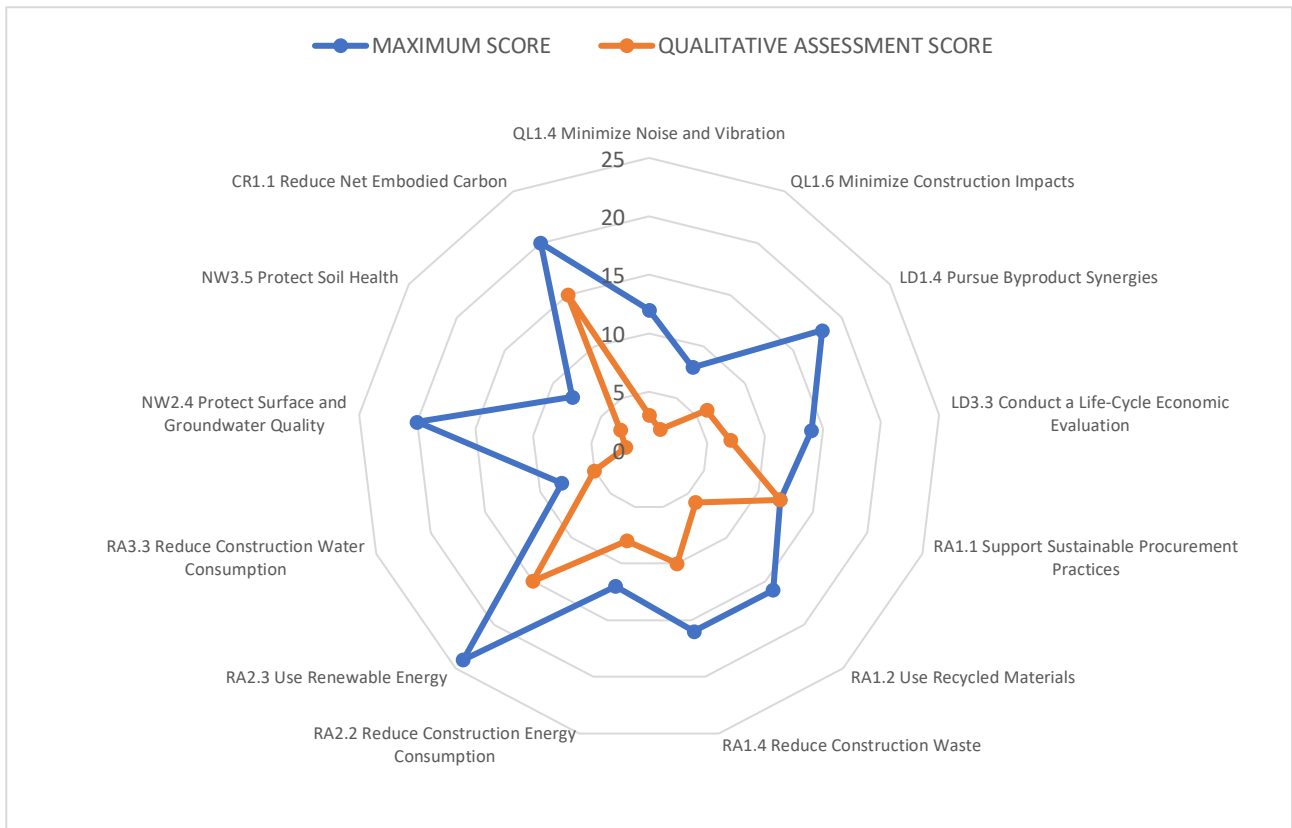


Fig. 17-4, Brine Ground Freezing technique - Diagram of score contribution vs. each Envision indicator.

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX
QL1.4 Minimize Noise and vibration	QUALITY OF WELLBEING	LIFE: The extent that operational noise and vibration is assessed and mitigated, and target levels achieved.	Strategies are implemented to mitigate noise and/or vibrations during operations. Noise reduction follows a mitigation hierarchy of avoidance/source elimination, minimization, abatement/receiver reduction, and offsetting/compensation.	3	25%	12
QL1.6 Minimize Construction Impacts	QUALITY OF WELLBEING	LIFE: Extent of issues addressed through construction management plans.	The management plan addresses one (1) type of construction impact: noise, safety/ wayfinding, access/ mobility, or lighting,	2	25%	8
LD1.4 Pursue Byproduct Synergies	LEADERSHIP: COLLABORATION	The extent to which the project team works with external groups to find beneficial use of waste, excess resources, or capacity.	Candidates for byproduct synergies or reuse are identified. This can include finding a beneficial reuse for the project's waste or excess resources, or the project's beneficial reuse of external waste or excess resources. Project teams should also consider ecosystem services where project waste or excess resources can support natural systems, or where natural systems can process and remove project waste. The project team demonstrates an active attempt to incorporate at least one byproduct synergy or reuse into the project.	6	33%	18
LD3.3 Conduct a Life-Cycle Economic Evaluation	LEADERSHIP: ECONOMY	The comprehensiveness of the economic analyses used to determine the net impacts of the project, and their use in assessing alternatives to inform decision making.	LCCA is used to compare and assess alternatives for at least one major design component.	7	50%	14
RA1.1 Support Sustainable Procurement Practices	RESOURCE MATERIALS	ALLOCATION: The extent of sustainable procurement programs, and the percentage of materials sourced from manufacturers and/or suppliers that implement sustainable practices.	At least 50% of all project materials, supplies, and equipment meet the sustainable procurement policy/program requirements.	12	100%	12
RA1.2 Use Recycled Materials	RESOURCE MATERIALS	ALLOCATION: Percentage of project materials that are reused or recycled. Plants, soil, rock, and water are not included in this credit.	At least 15% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials.	6	38%	16
RA1.4 Reduce Construction Waste	RESOURCE MATERIALS	ALLOCATION: Percentage of total waste diverted from disposal.	At least 75% of all project materials, supplies, and equipment meet the sustainable procurement policy/program requirements.	10	63%	16
RA2.2 Reduce Construction Energy Consumption	RESOURCE ENERGY	ALLOCATION: The number of strategies implemented on the project during construction that reduce energy consumption and emissions.	The project implements, or has written requirements to implement, at least four (4) energy reduction strategies.	8	67%	12
RA2.3 Use Renewable Energy	RESOURCE ENERGY	ALLOCATION: Extent to which renewable energy sources are incorporated.	The project meets: 30% of energy needs (electricity and fuel) from renewable sources.	15	63%	24
RA3.3 Reduce Construction Water Consumption	RESOURCE WATER	ALLOCATION: The number of strategies implemented during construction that reduce potable water consumption.	At least five (5) potable water conservation strategies are implemented.	5	63%	8
NW2.4 Protect Surface and Groundwater Quality	NATURAL CONSERVATION	WORLD: Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	2	10%	20
NW3.5 Protect Soil Health	NATURAL ECOLOGY	WORLD: Degree to which the disruption of soil health has been minimized and restored.	100% of post-construction vegetated areas disturbed during construction are restored for	3	38%	8

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX	
			appropriate soil type, structure, and function to support healthy plant and tree growth.				
CR1.1 Embodied Carbon	Reduce Net	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in net embodied carbon of materials.	The project team demonstrates at least a 5% reduction in total embodied carbon of materials over the life of the project compared to the baseline. Calculations should be in tons CO ₂ .	15	75%	20
CR1.2 Greenhouse Emissions	Reduce Gas	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in operational greenhouse gas emissions.	(I) The project team demonstrates at least a 50% reduction in total CO₂eq over the operational life of the project compared to the baseline. Calculations should be in tons CO ₂ eq. (II) The project team maps and calculates the total annual greenhouse gas emissions of the final project design for reporting purposes. This includes direct and indirect greenhouse gas emissions and sequestration associated with project operations. Calculations must be in CO ₂ eq.	18	69%	26
CR1.3 Pollutant Emissions	Reduce Air	CLIMATE AND RESILIENCE: EMISSIONS	Reduction of air pollutants ompared to baseline.	(I) The project meets all applicable air quality standards and regulations for air pollutants. (II) The project implements strategies to reduce air pollutant emissions during operations.	2	11%	18
				114	49%	232	

Tab. 17-4, Ground Freezing with Brine technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.

The indicators that scored more than 50% of the maximum admitted total are:

- LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).
- RA1.1 Support Sustainable Procurement Practices (100%).
- RA1.4 Reduce Construction Waste (63%).
- RA2.2 Reduce Construction Energy Consumption (67%).
- RA2.3 Use Renewable Energy (63%).
- RA3.3 Reduce Construction Water Consumption (63%).
- CR1.1 Reduce Net Embodied Carbon (75%).
- CR1.2 Reduce Greenhouse Gas Emissions (69%).

The indicators that scored between 20% and 49% of the maximum admitted total are:

- QL1.4 Minimize Noise and Vibration (25%).
- QL1.6 Minimize Construction Impacts (25%).
- LD1.4 Pursue Byproduct Synergies (33%).
- RA1.2 Use Recycled Materials (38%).
- NW3.5 Protect Soil Health (38%).

The indicators that scored less than 19% of the maximum admitted total are:

- NW2.4 Protect Surface and Groundwater Quality (10%).
- CR1.3 Reduce Air Pollutant Emissions (11%).

Compared to a maximum reachable of 232 points, this ground improvement process scored 114 points (which means an overall value of 49%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a 'gold' rating following Envision rating scale).

17.5 Qualitative assessment for the nitrogen ground freezing technique

For nitrogen-based freezing, the radar graphic demonstrates how resource allocation and climate and resilience receive the highest scores.

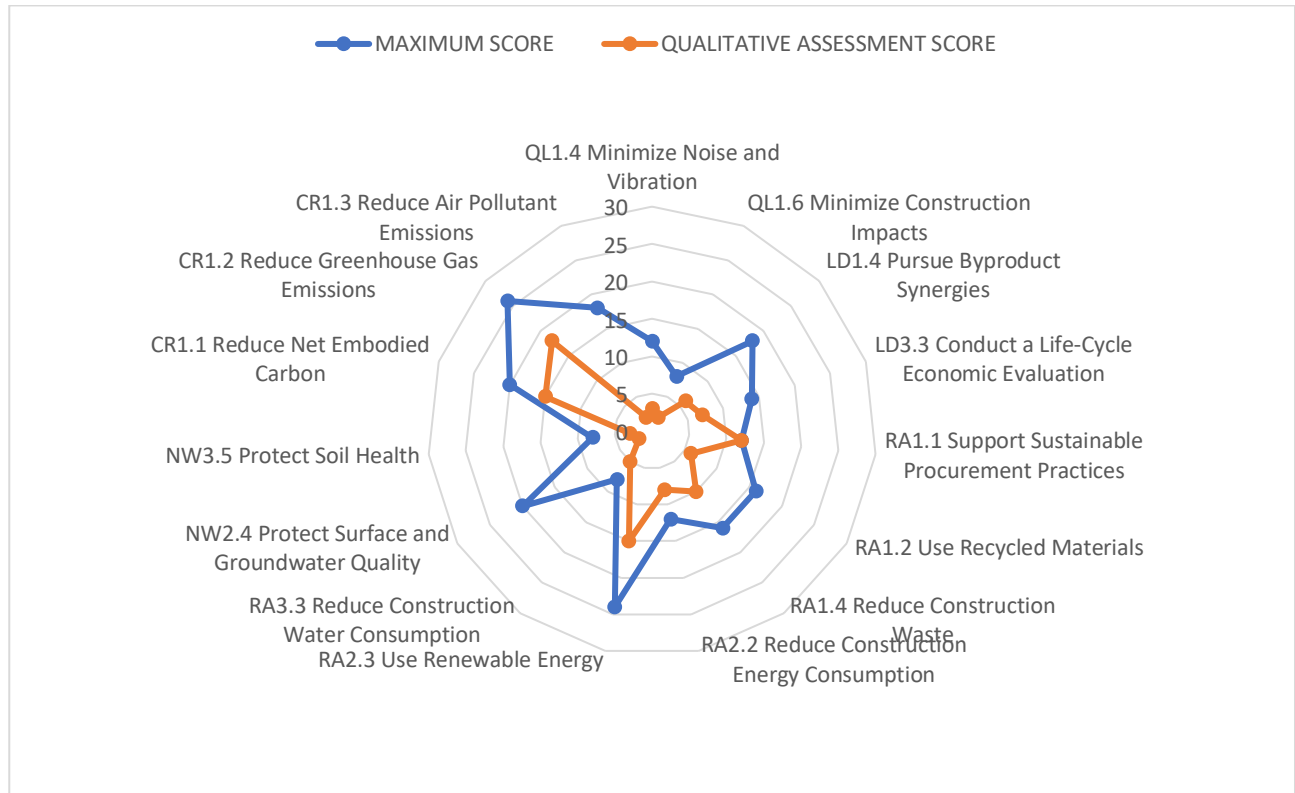


Fig. 17-5, Ground Freezing with Nitrogen technique. Diagram of score contribution vs. each Envision indicator.

PhD Thesis:
Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX
QL1.4 Noise and vibration	Minimize QUALITY OF WELLBEING	LIFE: The extent that operational noise and vibration is assessed and mitigated, and target levels achieved.	Strategies are implemented to mitigate noise and/or vibrations during operations. Noise reduction follows a mitigation hierarchy of avoidance/source elimination, minimization, abatement/receiver reduction, and offsetting/compensation."	3	25%	12
QL1.6 Construction impacts	Minimize QUALITY OF WELLBEING	LIFE: Extent of issues addressed through construction management plans.	The management plan addresses one (1) type of construction impact: noise, safety/ wayfinding, access/ mobility, or lighting,	2	25%	8
LD1.4 Byproduct Synergies	Pursue LEADERSHIP: COLLABORATION	The extent to which the project team works with external groups to find beneficial use of waste, excess resources, or capacity.	The project team demonstrates an active attempt to incorporate at least one byproduct synergy or reuse into the project.	6	33%	18
LD3.3 Conduct a Life-Cycle Economic Evaluation	LEADERSHIP: ECONOMY	The comprehensiveness of the economic analyses used to determine the net impacts of the project, and their use in assessing alternatives to inform decision making.	LCCA is used to compare and assess alternatives for at least one major design component.	7	50%	14
RA1.1 Sustainable Procurement Practices	Support RESOURCE ALLOCATION: MATERIALS	The extent of sustainable procurement programs, and the percentage of materials sourced from manufacturers and/or suppliers that implement sustainable practices.	At least 50% of all project materials, supplies, and equipment meet the sustainable procurement policy/program requirements.	12	100%	12
RA1.2 Use Recycled Materials	Recycled RESOURCE ALLOCATION: MATERIALS	Percentage of project materials that are reused or recycled. Plants, soil, rock, and water are not included in this credit.	At least 15% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials.	16	100%	16
RA1.4 Reduce Construction Waste	Reduce RESOURCE ALLOCATION: MATERIALS	Percentage of total waste diverted from disposal.	The project team sets a target goal for construction waste diversion. During construction at least 75% of waste materials are recycled, reused, and/or salvaged. Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse."	10	63%	16
RA2.2 Construction Energy Consumption	Reduce RESOURCE ENERGY	ALLOCATION: The number of strategies implemented on the project during construction that reduce energy consumption and emissions.	The project implements, or has written requirements to implement, at least four (4) energy reduction strategies.	8	67%	12
RA2.3 Use Renewable Energy	RENEWABLE ENERGY	ALLOCATION: Extent to which renewable energy sources are incorporated.	The project meets: 30% of energy needs (electricity and fuel) from renewable sources.	15	63%	24
RA3.3 Construction Water Consumption	Reduce RESOURCE WATER	ALLOCATION: The number of strategies implemented during construction that reduce potable water consumption.	At least one (1) potable water conservation strategy is implemented.	5	63%	8
NW2.4 Surface and Groundwater Quality	Protect NATURAL CONSERVATION	WORLD: Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	Designs, plans, and programs instituted to prevent and monitor surface water and groundwater contamination during construction and operations.	2	10%	20
NW3.5 Protect Soil Health	Soil NATURAL ECOLOGY	WORLD: Degree to which the disruption of soil health has been minimized and restored.	100% of post-construction vegetated areas disturbed during construction are restored for appropriate soil type, structure, and function to support healthy plant and tree growth.	3	38%	8

PhD Thesis:
 Advances in the sustainability assessment of geotechnical ground improvement processes

INDICATOR (CREDIT)	SECTION	METRIC	CRITERIA	SCORE	%	MAX
CR1.1 Reduce Net Embodied Carbon	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in net embodied carbon of materials.	The project team demonstrates at least a 30% reduction in total embodied carbon of materials over the life of the project compared to the baseline. Calculations should be in tons CO ₂ .	15	75%	20
CR1.2 Reduce Greenhouse Emissions	CLIMATE AND RESILIENCE: EMISSIONS	Percentage of reduction in operational greenhouse gas emissions.	(I) The project team demonstrates at least a 50% reduction in total CO₂eq over the operational life of the project compared to the baseline. Calculations should be in tons CO ₂ eq. (II) The project team maps and calculates the total annual greenhouse gas emissions of the final project design for reporting purposes. This includes direct and indirect greenhouse gas emissions and sequestration associated with project operations. Calculations must be in CO ₂ eq.	18	69%	26
CR1.3 Reduce Air Pollutant Emissions	CLIMATE AND RESILIENCE: EMISSIONS	Reduction of air pollutants ompared to baseline.	(I) The project meets all applicable air quality standards and regulations for air pollutants. (II) The project eliminates air pollutant sources in the design, chooses a non-polluting alternative, or achieves at least a 98% net reduction in air pollution emissions compared to the baseline.	9	50%	18
				114	49%	232

Tab. 17-5, Ground Freezing with Nitrogen Freezing technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.

The indicators that scored more than 50% of the maximum admitted total are:

- LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).
- RA1.1 Support Sustainable Procurement Practices (100%).
- RA1.4 Reduce Construction Waste (63%).
- RA2.2 Reduce Construction Energy Consumption (67%).
- RA2.3 Use Renewable Energy (63%).
- RA3.3 Reduce Construction Water Consumption (63%).
- CR1.1 Reduce Net Embodied Carbon (75%).
- CR1.2 Reduce Greenhouse Gas Emissions (69%).

The indicators that scored between 20% and 49% of the maximum admitted total are:

- QL1.4 Minimize Noise and Vibration (25%).
- QL1.6 Minimize Construction Impacts (25%).
- LD1.4 Pursue Byproduct Synergies (33%).
- RA1.2 Use Recycled Materials (38%).
- NW3.5 Protect Soil Health (38%).

The indicators that scored less than 19% of the maximum admitted total are:

- NW2.4 Protect Surface and Groundwater Quality (10%).
- CR1.3 Reduce Air Pollutant Emissions (11%).

Compared to a maximum reachable of 232 points, this ground improvement process scored 114 points (which means an overall value of 49%). When confirmed by the analyses, this could be considered a good scoring (rewardable with a 'gold' rating following Envision rating scale).

18 Appendix 2: The pilot case LCA analysis for each soil treatment technology (Step 2 of the method)

18.1 Generality

The application to the case study of the five ground improvement techniques is analyzed with a LCA model, as the second step of the proposed three-phased method.

The LCA analysis carried out for the 5 examined cases are here resumed⁹.

For each case the sizing of the equipment is based on the professional experience of the author in the specific geotechnical construction sector.

The software Simapro (rel. 9.5.0.0, 2023) has been used for the analysis [Pré Consultants, 2018].

The impact framework adopted was the Environmental Footprint (EF) method 3.0. The method, supported by SimaPro database, includes a number of adaptations, making it compatible with the data libraries provided in SimaPro.

The implementation of the method in Simapro is based on EF method with the following modifications:

- it does not include any substances, which would be new to SimaPro, e.g. regionalized land use flows;
- additional substances have been included as they are extensively used by the background databases and their synonyms are part of the original EF method [Pré Consultants, 2018].

In order to focus the case studies on process performance, for all the studied cases transports (when requested at the inventory level) has been standardized, considering an average distance of 90km. This assumption will be adopted in all the 5 analyzed cases.

Characterization.

18 impact categories have been considered.

Normalization.

The global normalization set for a reference year 2010 is part of the EF method. These normalization values are updated for the EF 3.0 method in November 2019 and implemented in Simapro.

Weighting.

The EF 3.0 method only has a single weighting set, which includes toxicity and allow weighting across impact categories. This means the impact (or damage) category indicator results are multiplied by weighting factors and are added to create a total or single score.

How the results will be presented.

The results of the LCA analysis for the PG case study are presented and discussed in a visual format. The representation of various impacts will be achieved through several perspectives, namely characterized, normalized weighted, and single point, within the selected EF 3.0 impact framework.

⁹ The LCA analysis results are taken from the PhD thesis of the co-authors of this research (Stefano Susani).

Results are presented in terms of characterization, normalization, weighting, and single point views, according to the process scheme adopted and to the main phases identified for each soil treatment type. Where needed, an additional and specific analysis is performed for the relevant subprocesses.

18.2 LCA analysis for permeation grouting (PG)

Input data

The following table includes the main data for the case of permeation grouting.

ITEM	INPUT	VALUE	UNIT	SIMAPRO ECOINVENT REFERENCE
PVC TAM	Product	320	Mass (kg)	Polyvinylchloride, bulk polymerised {RER} polyvinylchloride production, bulk polymerisation APOS, U (320kg)
	Process	320	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U (320kg)
	Transport	28800	Mass*Dist (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} APOS, U (320kg * 90km)
Diesel Driller	Consumption	3200	Energy (kWh)	Machine operation diesel, >= 74.57, underground mining (GLO), market for APOS, U (100kW * 32h)
	Product	6500	Mass (kg)	/
	Transport	585000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (6500kg * 90km)
Electric mixing agitator	Consumption	370	Energy (kWh)	Heat, air-water heat pump 10kW {Europe without Switzerland} market for floor heating from air-water heat pump APOS, U (2.2kW * 168hr)
	Product	350	Mass (kg)	/
	Transport	31500	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (350kg * 90km)
Turbomixer (electricity)	Consumption	9	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U
	Product	350	Mass (kg)	/
	Transport	31500	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} APOS, U (350kg * 90km)
Electric injection unit mixture+sheath (2 units)	Consumption	1848	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U (5.5kW * 2 * 168hr)
	Product	300	Mass (kg)	/
	Transport	300*274=82200	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U (300kg * 2 * 90km)
Electric turbomixer mixture+sheath	Consumption	768	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U
	Product	350	Mass (kg)	/
	Transport	350*274=95900	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U
Cement	Product	42751	Mass (kg)	Cement, Portland {Europe without Switzerland} production APOS, U
	Product	42751	Mass (kg)	Cement, pozzolana and fly ash 11-35% {Europe without Switzerland} cement production, pozzolana and fly ash 11-35% APOS, U
	Transport	3847590	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U (42751kg * 90km)
Bentonite	Product	3671	Mass (kg)	Bentonite {RoW} quarry operation APOS, U
	Transport	330390	Mass*Dist (kg*km)	Transport, freight, lorry 3.5-7.5 metric ton, euro5 {RER} market for transport APOS, U (3671kg * 90km)
Additive	Product	357	Mass (kg)	Ethylene glycol singleethyl ether {RER} production APOS, U
	Transport	32130	Mass*Dist (kg*km)	Transport, freight, lorry 3.5-7.5 metric ton, euro5 {RER} market for transport APOS, U (357kg * 90km)
Water	Water from the tap	105900	Mass (kg)	Tap water {Europe without Switzerland} market for APOS, U
	Transport	/	Mass*Dist (kg*km)	/
Mixture waste	Waste	6.36	Volume (m3)	Wastewater from concrete production {RoW} treatment of, capacity 5E9l/year APOS, U

Tab. 18-1, LCA analysis input data for permeation grouting.

PG LCA analysis

The following figure shows the process scheme implemented for the PG treatment LCA analysis

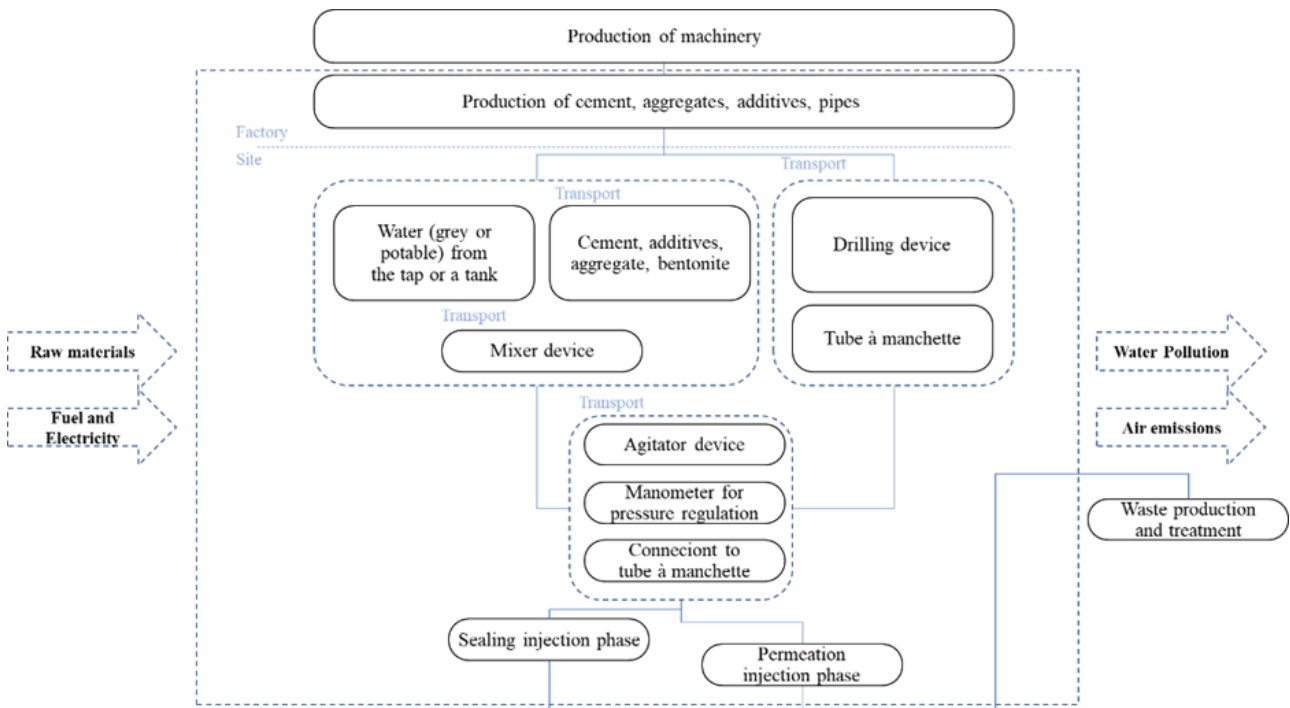


Fig. 18-1, Process scheme for LCA Analysis of the permeation grouting technique.

The results of the LCA analysis for the PG case study are presented and discussed in a visual format.

The following figure shows the characterization step view.

The latter puts in evidence the correlation between the PG procedures and the impact categories. The major impact of the grouting mix in comparison to the other processes comes evidently out. On the other hand, the analysis reveals that the “climate change”, frequently highlighted as a key influence in sustainability reports, results to be just one of several crucial aspects to consider.

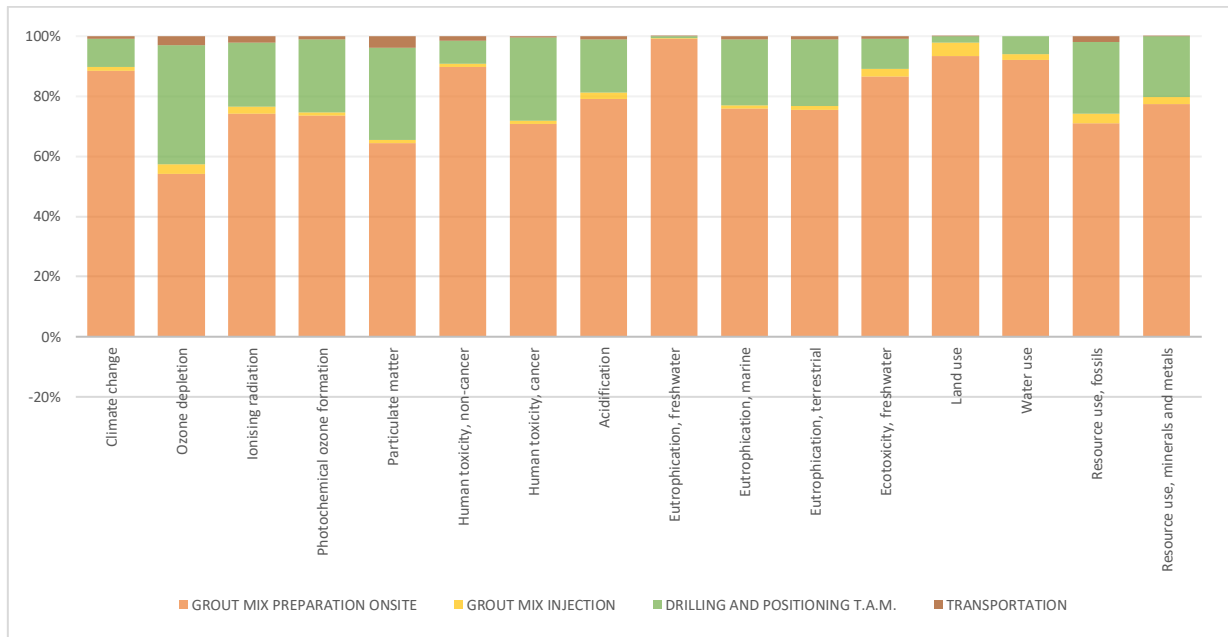


Fig. 18-2, Permeation grouting technique: impacts, characterization view.

The following chart shows the normalization step results, that confirm the grout mixing phase, in which preponderates the presence of the cement.



Fig. 18-3, Permeation grouting technique: impacts, normalized view.

The following figure shows the weighting step results. The relevant impact categories are climate change and resource use.

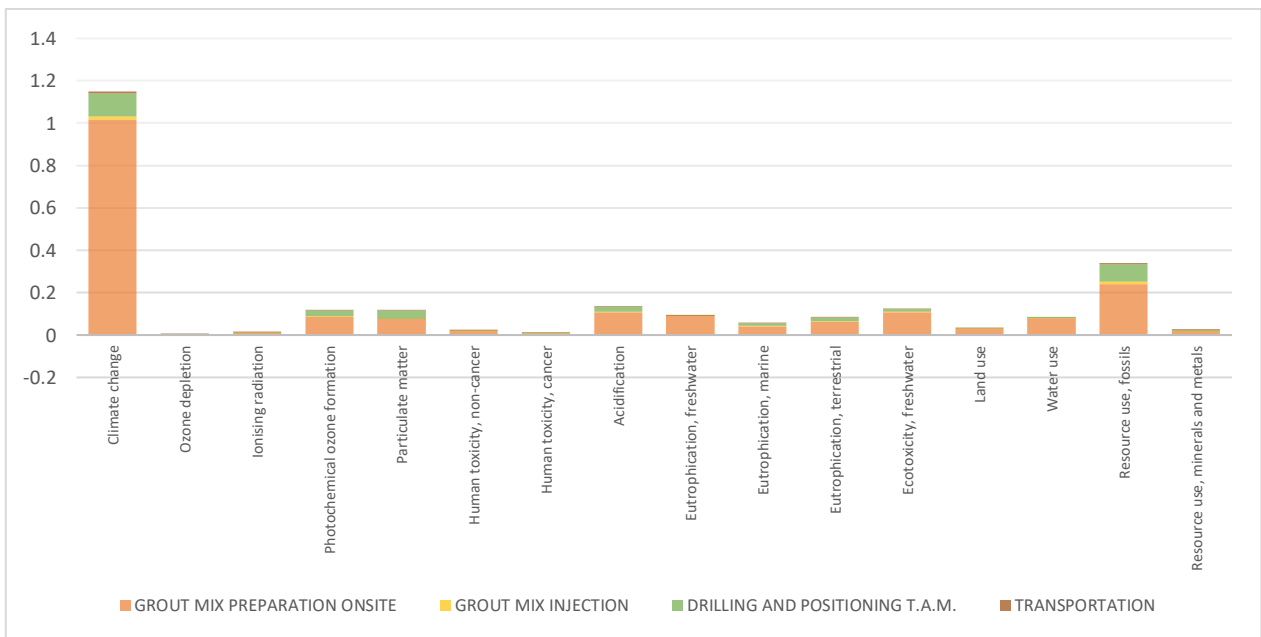


Fig. 18-4, Permeation grouting technique: impacts, weighted view.

The next chart shows the single point view, according to the four phases identified in the PG process.



Fig. 18-5, Permeation Grouting technique: impacts, single point view.

Here it follows another graph that shows the single score impact view focused on the various stages of the grout mix preparation on site. The chart allows to understand the role played by each of them, and in particular by the cement, material that comes out definitely as the most impactful of the PG process.

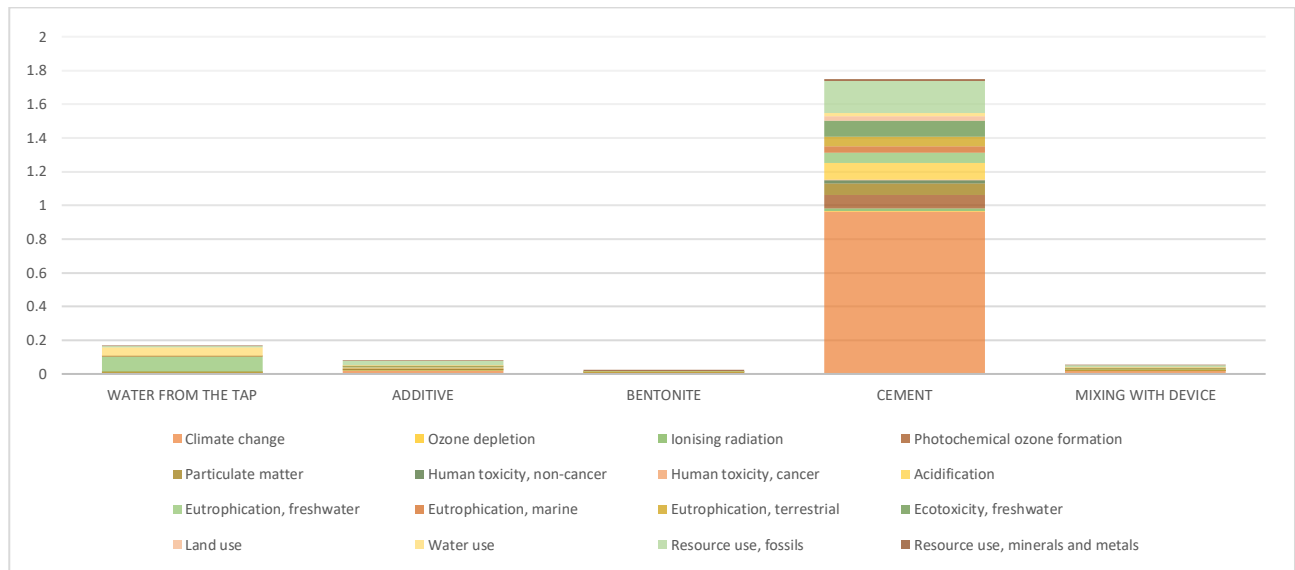


Fig. 18-6, Permeation Grouting technique: grout mix preparation, impacts, single point view.

The following table synthetizes the impact percentages in the full case.

Impact category	Unit	Total	GROUTING MIX	INJECTION	DRILLING	TRANSPORTS
Total	%	100,0	83,3	1,8	13,9	1,1
Climate change	%	46,1	40,8	0,6	4,4	0,4
Ozone depletion	%	0,1	0,1	0,0	0,1	0,0
Ionising radiation	%	1,0	0,8	0,0	0,1	0,0
Photochemical ozone formation	%	4,7	3,5	0,1	1,1	0,1
Particulate matter	%	4,8	3,1	0,1	1,5	0,2
Human toxicity, non-cancer	%	0,9	0,8	0,0	0,1	0,0
Human toxicity, cancer	%	0,4	0,3	0,0	0,1	0,0
Acidification	%	5,5	4,3	0,1	1,0	0,1
Eutrophication, freshwater	%	6,6	6,3	0,1	0,2	0,0
Eutrophication, marine	%	2,3	1,7	0,0	0,5	0,0
Eutrophication, terrestrial	%	3,3	2,5	0,0	0,7	0,0
Ecotoxicity, freshwater	%	4,9	4,3	0,1	0,5	0,0
Land use	%	1,3	1,2	0,1	0,0	0,0
Water use	%	3,4	3,2	0,1	0,2	0,0
Resource use, fossils	%	13,6	9,6	0,4	3,3	0,3
Resource use, minerals and metals	%	1,0	0,8	0,0	0,2	0,0

Tab. 18-2, Permeation Grouting technique: impact percentages, single point.

The following table resumes the impact percentages in the grout mix preparation subcase.

Impact category	Unit	Total	WATER FROM THE TAP	ADDITIVE	BENTONITE	CEMENT	MIXING WITH DEVICE
Total	%	100,0	8,0	3,9	1,2	84,3	2,6
Climate change	%	49,0	0,4	1,1	0,2	46,5	0,8
Ozone depletion	%	0,1	0,0	0,0	0,0	0,1	0,0
Ionising radiation	%	1,0	0,1	0,0	0,0	0,8	0,0
Photochemical ozone formation	%	4,2	0,0	0,2	0,1	3,8	0,1
Particulate matter	%	3,7	0,0	0,2	0,2	3,3	0,1
Human toxicity, non-cancer	%	0,9	0,0	0,0	0,0	0,9	0,0
Human toxicity, cancer	%	0,4	0,0	0,1	0,0	0,2	0,0
Acidification	%	5,2	0,1	0,2	0,1	4,7	0,2

Eutrophication, freshwater	%	7,6	4,2	0,2	0,0	3,0	0,2
Eutrophication, marine	%	2,1	0,2	0,0	0,0	1,8	0,0
Eutrophication, terrestrial	%	3,0	0,0	0,1	0,0	2,8	0,1
Ecotoxicity, freshwater	%	5,1	0,1	0,2	0,1	4,5	0,2
Land use	%	1,4	0,0	0,0	0,0	1,3	0,1
Water use	%	3,8	2,5	0,2	0,0	1,0	0,2
Resource use, fossils	%	11,6	0,4	1,3	0,1	9,2	0,6
Resource use, minerals and metals	%	0,9	0,0	0,1	0,3	0,4	0,0

Tab. 18-3, Permeation Grouting technique: grout mix preparation, impact percentages, single point.

The following table includes the raw data of the characterization step of the analysis, and the quantities of the relevant KPIs of each impact scenario.

Impact category	Unit	Total	GROUT MIX PREPARATION ONSITE	GROUT MIX INJECTION	T.A.M. DRILLING AND POSITIONING	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	44162,18157	39062,48686	570,03155	4167,30841	362,35474
Ozone depletion	kg CFC11 eq	0,00279	0,00152	0,00009	0,00111	0,00008
Ionising radiation	kBq U-235 eq	2115,31389	1751,90315	71,47018	269,24791	22,69265
Photochemical ozone formation	kg NMVOC eq	100,18710	73,61658	1,25762	24,15130	1,16161
Particulate matter	disease inc.	0,00080	0,00051	0,00001	0,00024	0,00003
Human toxicity, non-cancer	CTUh	0,00027	0,00025	0,00000	0,00002	0,00000
Human toxicity, cancer	CTUh	0,00001	0,00001	0,00000	0,00000	0,00000
Acidification	mol H+ eq	122,69145	96,93313	2,82126	21,72057	1,21648
Eutrophication, freshwater	kg P eq	9,42141	8,99012	0,15533	0,27415	0,00182
Eutrophication, marine	kg N eq	37,41535	28,53300	0,45249	8,04379	0,38606
Eutrophication, terrestrial	mol N eq	393,50655	296,89314	4,76439	87,60686	4,24216
Ecotoxicity, freshwater	CTUe	273202,01072	236308,80508	7365,66684	27327,90529	2199,63351
Land use	Pt	323969,19495	302780,25208	14117,42741	6959,99522	111,52025
Water use	m3 depriv.	11477,57970	10576,18601	214,95153	687,44759	-1,00543
Resource use, fossils	MJ	264587,27601	187619,67118	8515,98291	63394,15336	5057,46855
Resource use, minerals and metals	kg Sb eq	0,02053	0,01589	0,00050	0,00412	0,00002
Climate change - Fossil	kg CO2 eq	44070,27989	38977,67315	566,35006	4163,92277	362,33390
Climate change - Biogenic	kg CO2 eq	60,92449	55,21083	3,14456	2,55176	0,01733
Climate change - Land use and LU change	kg CO2 eq	30,97718	29,60288	0,53692	0,83388	0,00350

Tab. 18-4, Permeation Grouting technique: grout mix preparation, impact percentages, characterization.

PG LCA sensitivity analysis

Main leverages to focus on, coming from the qualitative assessment with Envision and the outcomes of the 'baseline' LCA analysis:

- Energy focus: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation focus: Improving the rating of diesel transportation fueled trucks.
- Material focus: for cement, reduce the content in clinker (through pozzolana or fly ash additions).

A sensitivity run of the LCA model has been performed with these upgrades:

- Energy: use of an energy mix 70% fossil and 30% renewable (for example: hydroelectric power generated from run-off river systems), through the Ecoinvent string: Electricity, high voltage {IT}| electricity production, hydro, run-of-river | APOS, U.
- Cement: use of Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string: Cement, pozzolana and fly ash 11-35% {Europe without Switzerland}| market for cement, pozzolana and fly ash 11-35% | APOS, U.
- Steel: use of iron coming from scrap, through the Ecoinvent string Iron scrap, unsorted {RoW}| steel production, electric, low-alloyed | APOS, U.
- Transportation: use of trucks Euro6 instead of Euro5, through the Ecoinvent string: Transport, freight, lorry 16-32 metric ton, EURO6 {RER}| transport, freight, lorry 16-32 metric ton, EURO6 | APOS, U.

Results of the sensitivity run presented in the characterization format.

Impact category	Unit	Total	GROUT MIX PREPARATION ONSITE	GROUT MIX INJECTION	T.A.M. DRILLING AND POSITIONING	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	36927,3	32017,1	399,2	4167,3	343,7
Ozone depletion	kg CFC11 eq	0,0	0,0	0,0	0,0	0,0
Ionising radiation	kBq U-235 eq	1824,9	1482,9	50,0	269,2	22,7
Photochemical ozone formation	kg NMVOC eq	86,8	61,3	0,9	24,2	0,5
Particulate matter	disease inc.	0,0	0,0	0,0	0,0	0,0
Human toxicity, non-cancer	CTUh	0,0	0,0	0,0	0,0	0,0
Human toxicity, cancer	CTUh	0,0	0,0	0,0	0,0	0,0
Acidification	mol H+ eq	104,7	80,3	2,0	21,7	0,7
Eutrophication, freshwater	kg P eq	8,7	8,3	0,1	0,3	0,0
Eutrophication, marine	kg N eq	32,5	24,0	0,3	8,0	0,1
Eutrophication, terrestrial	mol N eq	338,0	245,8	3,3	87,6	1,3
Ecotoxicity, freshwater	CTUe	226507,5	191801,8	5178,1	27327,9	2199,8
Land use	Pt	261138,6	244190,9	9876,1	6960,0	111,5
Water use	m3 depriv.	10677,6	9914,5	76,7	687,4	-1,0
Resource use, fossils	MJ	233873,1	159458,6	5962,1	63394,2	5058,3
Resource use, minerals and metals	kg Sb eq	0,0	0,0	0,0	0,0	0,0
Climate change - Fossil	kg CO2 eq	36851,9	31947,7	396,6	4163,9	343,7
Climate change - Biogenic	kg CO2 eq	49,9	45,2	2,2	2,6	0,0
Climate change - Land use and LU change	kg CO2 eq	25,5	24,3	0,4	0,8	0,0

Tab. 18-5, Permeation Grouting technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.

Here it follows on the left the table including the quantity of materials and energy necessary for the studied process, on the right, table with comparison between the baseline and sensitivity analysis outcomes. A 4% cut-off value has been applied to the weighted score.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
			Climate change	44,89%	36927,3063	44162,18116	kg CO2 eq	-16,38%
Cement	42751	kg	Ozone depletion	0,00%	0,00251736	0,002792854	kg CFC11 eq	-9,86%
Energy-Electricity	2995	kWh	Ionising radiation	0,00%	1824,891663	2115,313875	kBq U-235 eq	-13,73%
Energy-Diesel	3200	kWh	Photochemical ozone formation	4,77%	86,75967776	100,1871036	kg NMVOC eq	-13,40%
Steel	0	kg	Particulate matter	5,03%	0,000714601	0,000796777	disease inc.	-10,31%
T.A.M.	320	kg	Human toxicity, non-cancer	0,00%	0,000229547	0,000273693	CTUh	-16,13%
Sludge waste	6.36	m3	Human toxicity, cancer	0,00%	7,50983E-06	8,23528E-06	CTUh	-8,81%
Water	105900	kg	Acidification	5,46%	104,6875206	122,6914512	mol H+ eq	-14,67%
			Eutrophication, freshwater	7,09%	8,701845279	9,421410615	kg P eq	-7,64%
			Eutrophication, marine	0,00%	32,5224058	37,41534811	kg N eq	-13,08%
			Eutrophication, terrestrial	0,00%	338,0142282	393,5065501	mol N eq	-14,10%
			Ecotoxicity, freshwater	4,76%	226507,5325	273202,0088	CTUe	-17,09%
			Land use	0,00%	261138,5881	323969,1919	Pt	-19,39%
			Water use	0,00%	10677,62947	11477,57963	m3 depriv.	-6,97%
			Resource use, fossils	13,99%	233873,1103	264587,2741	MJ	-11,61%
			Resource use, minerals and metals	0,00%	0,018859693	0,020534279	kg Sb eq	-8,16%

Tab. 18-6, Case Study Permeation grouting, sensitivity analysis vs. baseline, total impact indicators, characterization.

18.3 LCA analysis for single fluid jet grouting (JG-SF)

Input data

The following table includes the main data for the case of single fluid grouting.

ITEM	INPUT	VALUE	UNIT	SIMAPRO ECOINVENT 3 IDENTIFIER
Diesel Driller	Consumption	2516	Duration (hr)	Machine operation diesel, >= 74.57, underground mining (GLO), market for APOS, U (111kW * (34h_drilling+39_injecting))
	Product	6500	Mass (kg)	/
	Transport	585000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (65000kg * 90km)
Electric Turbomixer	Consumption	2145	Energy (kWh)	Heat, air-water heat pump 10kW {Europe without Switzerland} market for floor heating from air-water heat pump APOS, U (55kW * 39hr)
	Product	6600	Mass (kg)	/
	Transport	594000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (6600kg * 90km)
Electric injection unit mixture	Consumption	14352	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U (368kW * 39hr)
	Product	12000	Mass (kg)	/
	Transport	108000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U (12000kg * 90km)
Cement	Product	323000	Mass (kg)	Cement, Portland {Europe without Switzerland} production APOS, U
	Transport	290700	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U (323000kg * 90km)
Water	Water from the tap	323000	Mass (kg)	Tap water {Europe without Switzerland} market for APOS, U
	Transport	/	Mass*Dist (kg*km)	/
Effluent mixture	Waste	214	Volume (m ³)	Wastewater from concrete production {RoW} treatment of, capacity 5E9l/year APOS, U

Tab. 18-7, LCA analysis input data for single fluid Jet Grouting.

JG-SF LCA analysis

The following figure shows the process scheme implemented for the JG-SF treatment LCA analysis

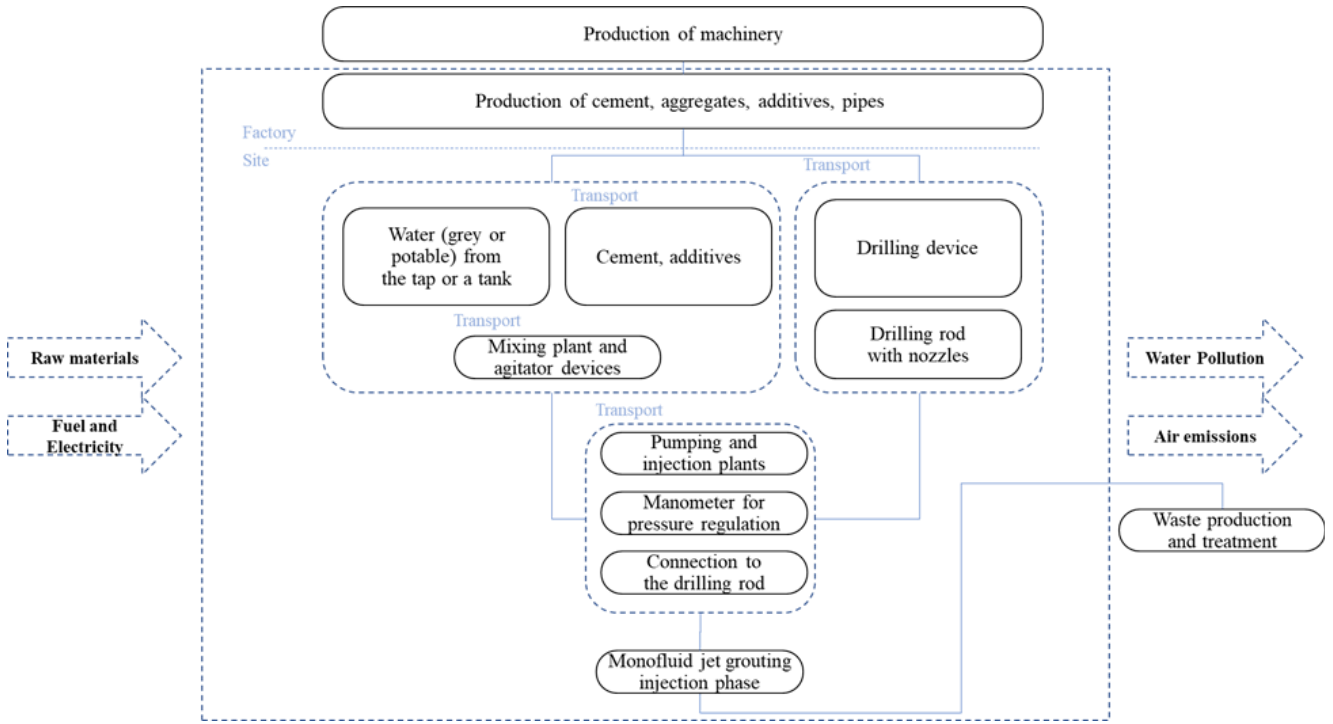


Fig. 18-7, Process scheme for LCA Analysis of the single fluid Jet Grouting technique.

The following graph shows the characterization step view.

Grout mix preparation and injection play a significant role in all categories.

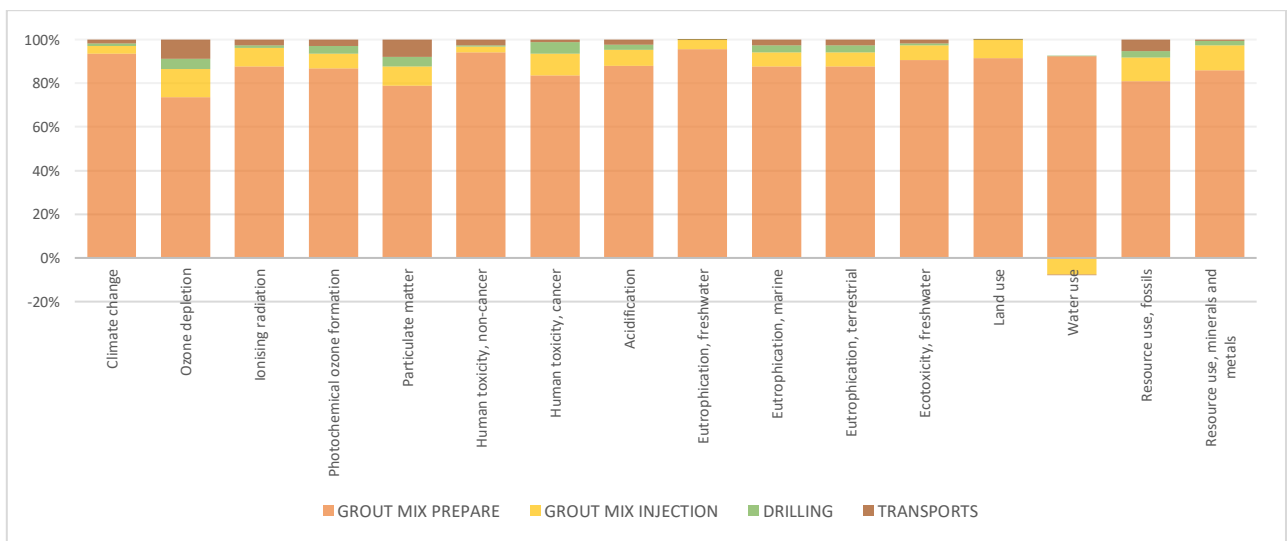


Fig. 18-8, Jet Grouting with single fluid technique: impact, characterization view.

The following chart shows the normalization step results.

The significance of the grouting mix is evident, being the primary component in all impact schemes.

The utilization of the normalization coefficient demonstrates the analogy between the current scenario and the process of permeation grouting, but with a greater emphasis on the mix phase. This is due to the definitely higher volume of cement grout used by the process, that acts for mixing-up the ground with a partial substitution of soil grains.

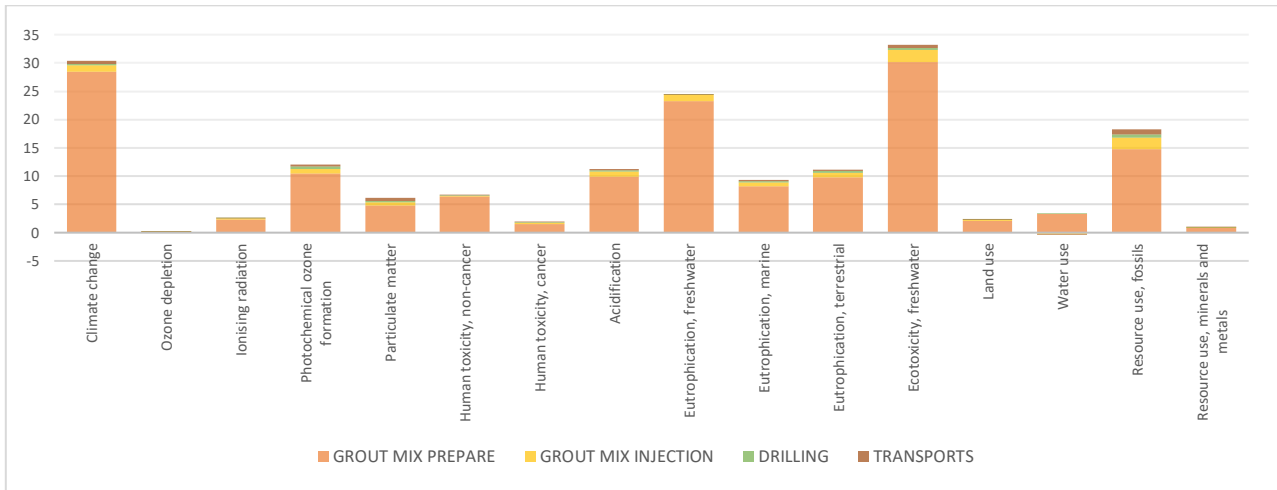


Fig. 18-9, Jet Grouting with single fluid technique: impact, normalization view.

The following figure shows the weighting step results. The relevant impact categories are climate change, resource use, water resource depletion and air quality.

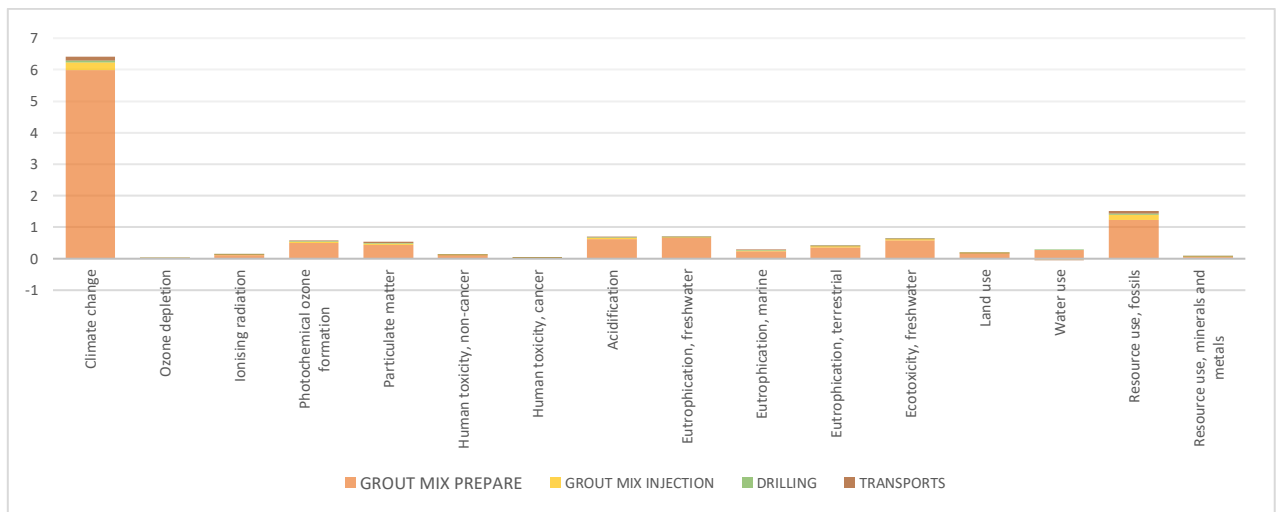


Fig. 18-10, Jet Grouting with single fluid technology: impact, weighted view.

The following chart shows the single point view, according to the four phases identified in the JG-SF process. The grout mix preparation is a crucial factor in impact evaluation.

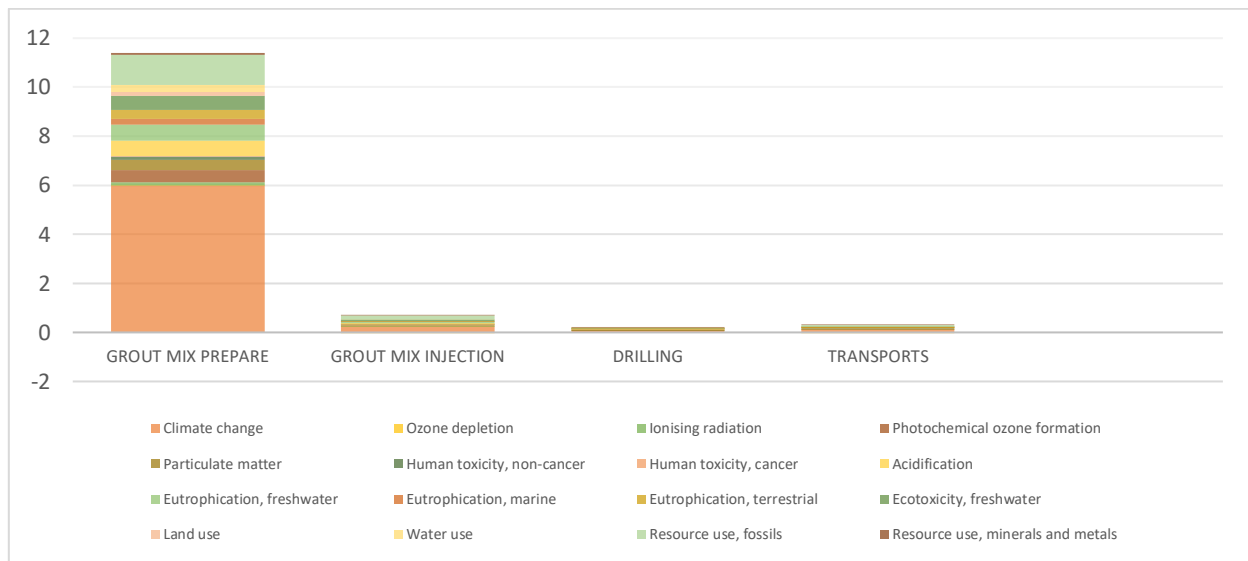


Fig. 18-11, Jet Grouting with single fluid technique: impact, single point/score view.

The following table synthesizes the impact percentages.

Impact category	Unit	Total	GROUT MIX PREPARATION	GROUT MIX INJECTION	DRILLING	TRANSPORTATION
Total	%	100,0	92,0	4,5	1,4	2,1
Climate change	%	51,7	49,0	1,5	0,4	0,8
Ozone depletion	%	0,1	0,1	0,0	0,0	0,0
Ionising radiation	%	1,0	0,9	0,1	0,0	0,0
Photochemical ozone formation	%	4,5	4,0	0,3	0,1	0,1
Particulate matter	%	4,2	3,4	0,3	0,2	0,3
Human toxicity, non-cancer	%	1,0	0,9	0,0	0,0	0,0
Human toxicity, cancer	%	0,3	0,3	0,0	0,0	0,0
Acidification	%	5,6	5,0	0,3	0,1	0,1
Eutrophication, freshwater	%	5,1	4,9	0,2	0,0	0,0
Eutrophication, marine	%	2,2	2,0	0,1	0,1	0,0
Eutrophication, terrestrial	%	3,3	3,0	0,2	0,1	0,1
Ecotoxicity, freshwater	%	5,2	4,8	0,3	0,0	0,1
Land use	%	1,5	1,4	0,1	0,0	0,0
Water use	%	1,9	2,1	-0,2	0,0	0,0
Resource use, fossils	%	11,8	9,8	1,1	0,3	0,5
Resource use, minerals and metals	%	0,5	0,5	0,1	0,0	0,0

Tab. 18-8, Jet grouting with single fluid technique: impact percentages, single point view.

The grout mix preparation step impacts for 92.0%. The grout mix injection phase contributes 4.5% to the total impact. The result is strictly related to the massive use of mixture that characterizes the treatment process.

The following table includes the raw data of the characterization step of the analysis, and the quantities of the relevant KPIs of each impact scenario.

Impact category	Unit	Total	GROUT MIX ON SITE	GROUT MIX INJECTION	DRILLING	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	297937,36190	282049,05247	8883,53844	2577,77979	4426,99120

Ozone depletion	kg CFC11 eq	0,01348	0,01034	0,00153	0,00058	0,00103
Ionising radiation	kBq U-235 eq	13043,89159	11656,01668	949,13030	157,35355	281,39106
Photochemical ozone formation	kg NMVOC eq	578,32742	513,28082	33,20640	17,07448	14,76572
Particulate matter	disease inc.	0,00419	0,00343	0,00031	0,00017	0,00029
Human toxicity, non-cancer	CTUh	0,00187	0,00177	0,00004	0,00001	0,00004
Human toxicity, cancer	CTUh	0,00004	0,00003	0,00000	0,00000	0,00000
Acidification	mol H+ eq	745,56101	669,35194	46,81155	14,06494	15,33257
Eutrophication, freshwater	kg P eq	43,87501	42,08826	1,74656	0,01766	0,02253
Eutrophication, marine	kg N eq	215,75604	193,21662	11,90175	5,71770	4,91996
Eutrophication, terrestrial	mol N eq	2349,61080	2108,46807	124,16053	62,86361	54,11858
Ecotoxicity, freshwater	CTUe	1734046,34881	1601595,13413	95244,28638	11997,76319	25209,16511
Land use	Pt	2269326,77709	2108360,84166	158112,54792	1470,52547	1382,86204
Water use	m3 depriv.	38826,54249	41983,03649	-3151,32446	7,29788	-12,46743
Resource use, fossils	MJ	1379881,30564	1152103,68691	129600,31070	35464,20034	62713,10770
Resource use, minerals and metals	kg Sb eq	0,06825	0,06006	0,00670	0,00118	0,00030
Climate change - Fossil	kg CO2 eq	297313,36970	281466,59932	8842,46613	2577,57146	4426,73280
Climate change - Biogenic	kg CO2 eq	404,75280	369,30702	35,06431	0,16651	0,21495
Climate change - Land use and LU change	kg CO2 eq	219,23940	213,14613	6,00800	0,04182	0,04345

Tab. 18-9, Jet grouting with single fluid technique: impact percentages, characterization.

A focus on the grout mix preparation is shown in the following chart. The cement is the primary source of significant impacts; according to the single point evaluation, its contribution to the effect score is 10 times higher than the other components.

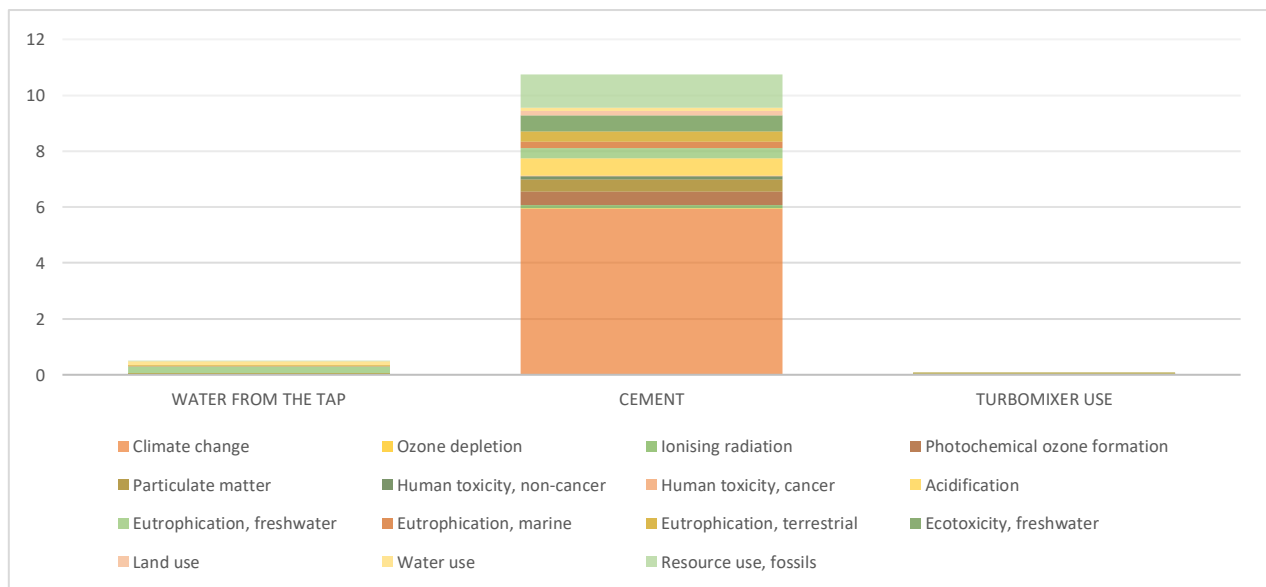


Fig. 18-12, Jet grouting with single fluid technique: grout mix preparation focus, impact, single score view.

The next table gives the single quantitative contributions: more than 95% of the impacts is performed by cement.

Impact category	Unit	Total	WATER ON SITE	CEMENT ON SITE	TURBOMIXING
Total	%	100,0	3,7	95,8	0,6
Climate change	%	53,2	0,2	52,9	0,2
Ozone depletion	%	0,1	0,0	0,1	0,0
Ionising radiation	%	1,0	0,0	1,0	0,0
Photochemical ozone formation	%	4,4	0,0	4,4	0,0
Particulate matter	%	3,7	0,0	3,7	0,0
Human toxicity, non-cancer	%	1,0	0,0	1,0	0,0
Human toxicity, cancer	%	0,3	0,0	0,3	0,0
Acidification	%	5,4	0,0	5,3	0,0
Eutrophication, freshwater	%	5,3	1,9	3,4	0,0
Eutrophication, marine	%	2,1	0,1	2,0	0,0
Eutrophication, terrestrial	%	3,2	0,0	3,2	0,0
Ecotoxicity, freshwater	%	5,2	0,1	5,1	0,0
Land use	%	1,5	0,0	1,5	0,0
Water use	%	2,3	1,1	1,1	0,0
Resource use, fossils	%	10,7	0,2	10,4	0,1
Resource use, minerals and metals	%	0,5	0,0	0,5	0,0

Tab. 18-10, Jet grouting with single fluid technique: impact percentages, single point view, mix preparation phase.

JG-SF LCA sensitivity analysis

Main leverages to focus on, coming from the qualitative assessment with Envision and the outcomes of the ‘baseline’ LCA analysis:

- Energy: Enhance efficiency in energy usage by (a) minimizing reliance on diesel engines for power generation and (b) utilizing electricity sourced from suppliers employing a diverse mix of renewable energy production methods.
- Transportation: Enhancing the performance of trucks powered by diesel fuel.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

A sensitivity run of the LCA model has been performed with these upgrades:

- Energy: use of an energy mix 70% fossil and 30% renewable (for example: hydroelectric power generated from run-off river systems). This energy mix will be implemented using the Ecoinvent string: Electricity, high voltage {IT}| electricity production, hydro, run-of-river | APOS, U.
- Cement: use of Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string: Cement, pozzolana and fly ash 11-35% {Europe without Switzerland}| market for cement, pozzolana and fly ash 11-35% | APOS, U.
- Steel: use iron coming from scrap, through the Ecoinvent string Iron scrap, unsorted {RoW}| steel production, electric, low-alloyed | APOS, U.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string: Transport, freight, lorry 16-32 metric ton, EURO6 {RER}| transport, freight, lorry 16-32 metric ton, EURO6 | APOS, U.

Results of the sensitivity run presented in the characterization format.

Impact category	Unit	Total	GROUT MIX ON SITE	GROUT MIX INJECTION	DRILLING	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	243865,88475	230043,85068	6988,08500	2577,77979	4256,16929
Ozone depletion	kg CFC11 eq	0,01146	0,00865	0,00125	0,00058	0,00099
Ionising radiation	kBq U-235 eq	10917,13495	9777,38980	711,35360	157,35355	271,03799
Photochemical ozone formation	kg NMVOC eq	474,33955	422,71863	29,02380	17,07448	5,52263
Particulate matter	disease inc.	0,00356	0,00287	0,00028	0,00017	0,00025
Human toxicity, non-cancer	CTUh	0,00153	0,00145	0,00003	0,00001	0,00004
Human toxicity, cancer	CTUh	0,00003	0,00003	0,00000	0,00000	0,00000
Acidification	mol H+ eq	609,58859	549,67268	37,42562	14,06494	8,42534
Eutrophication, freshwater	kg P eq	38,60662	37,33683	1,23044	0,01766	0,02170
Eutrophication, marine	kg N eq	177,78931	160,21344	10,45464	5,71770	1,40353
Eutrophication, terrestrial	mol N eq	1919,40385	1732,62204	108,31313	62,86361	15,60507
Ecotoxicity, freshwater	CTUe	1388365,94139	1281018,66241	70973,72194	11997,76310	24375,79393
Land use	Pt	1809977,70088	1696118,12338	111057,06889	1470,52546	1331,98315
Water use	m3 depriv.	33285,37621	37975,12512	-4685,03807	7,29788	-12,00872
Resource use, fossils	MJ	1154790,31223	957654,03542	101266,33782	35464,20007	60405,73891
Resource use, minerals and metals	kg Sb eq	0,05613	0,04961	0,00505	0,00118	0,00029
Climate change - Fossil	kg CO2 eq	243362,43334	229569,67868	6959,26281	2577,57146	4255,92039
Climate change - Biogenic	kg CO2 eq	325,12613	300,15275	24,59982	0,16651	0,20704
Climate change - Land use and LU change	kg CO2 eq	178,32529	174,01925	4,22236	0,04182	0,04185

Tab. 18-11, Jet Grouting with single fluid technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.

Here it follows on the left the table including the quantity of materials and energy necessary for the studied process, on the right, table with comparison between the baseline and sensitivity analysis outcomes. A 4% cut-off value has been applied to the weighted score.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	323000	kg	Climate change	0,00%	243865,88401	297937,36176	kg CO2 eq	-18,15%
Energy-Electricity	16497	kWh	Ozone depletion	0,00%	0,01146	0,01348	kg CFC11 eq	-15,02%
Energy-Diesel	2516	kWh	Ionising radiation	4,52%	10917,13489	13043,89158	kBq U-235 eq	-16,30%
Steel	0	kg	Photochemical ozone formation	4,34%	474,33955	578,32742	kg NMVOC eq	-17,98%
T.A.M.	0	kg	Particulate matter	0,00%	0,00356	0,00419	disease inc.	-15,05%
Sludge waste	214	m ³	Human toxicity, non-cancer	0,00%	0,00153	0,00187	CTUh	-17,81%
Water	323000	kg	Human toxicity, cancer	5,50%	0,00003	0,00004	CTUh	-15,03%
			Acidification	5,44%	609,58859	745,56100	mol H+ eq	-18,24%
			Eutrophication, freshwater	0,00%	38,60662	43,87501	kg P eq	-12,01%
			Eutrophication, marine	0,00%	177,78931	215,75604	kg N eq	-17,60%
			Eutrophication, terrestrial	5,05%	1919,40385	2349,61079	mol N eq	-18,31%
			Ecotoxicity, freshwater	0,00%	1388365,93687	1734046,34667	CTUe	-19,93%
			Land use	0,00%	1809977,69765	2269326,77323	Pt	-20,24%
			Water use	11,96%	33285,37621	38826,54247	m ³ depriv.	-14,27%
			Resource use, fossils	0,00%	1154790,30521	1379881,30282	MJ	-16,31%
			Resource use, minerals and metals	0,00%	0,05613	0,06825	kg Sb eq	-17,76%

Tab. 18-12, Case Study Jet Grouting Single fluid, sensitivity analysis vs. baseline, total impact indicators, characterization.

18.4 LCA analysis input for double fluid jet grouting (JG-DF)

Input data

The following table includes the main data for the case of single fluid grouting.

ITEM	INPUT	VALUE	UNIT	SIMAPRO ECOINVENT REFERENCE
Diesel Driller	Consumption	1050	Duration (hr)	Machine operation diesel, >= 74.57, underground mining (GLO), market for APOS, U (111kW * (14h_drilling+26_injecting))
	Product	9000	Mass (kg)	/
	Transport	810000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (6500kh * 90km)
Electric Turbomixer	Consumption	1430	Energy (kWh)	Heat, air-water heat pump 10kW {Europe without Switzerland} market for floor heating from air-water heat pump APOS, U (55kW * 26hr)
	Product	6600	Mass (kg)	/
	Transport	594000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (6600kg * 90km)
Electric injection unit mixture	Consumption	9568	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U (368kW * 26hr)
	Product	12000	Mass (kg)	/
	Transport	108000	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U (12000kg * 90km)
Cement	Product	425000	Mass (kg)	Cement, Portland {Europe without Switzerland} production APOS, U
	Transport	382500	Mass*Dist (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport APOS, U (425000kg * 90km)
Water	Water from the tap	425000	Mass (kg)	Tap water {Europe without Switzerland} market for APOS, U
	Transport	/	Mass*Dist (kg*km)	/
Effluent mixture	Waste	283	Volume (m ³)	Wastewater from concrete production {RoW} treatment of, capacity 5E9l/year APOS, U

Tab. 18-13, Jet grouting with double fluid technique: LCA analysis input data.

JGF-DF LCA analysis

The following figure shows the process scheme implemented for the JG-SF treatment LCA analysis

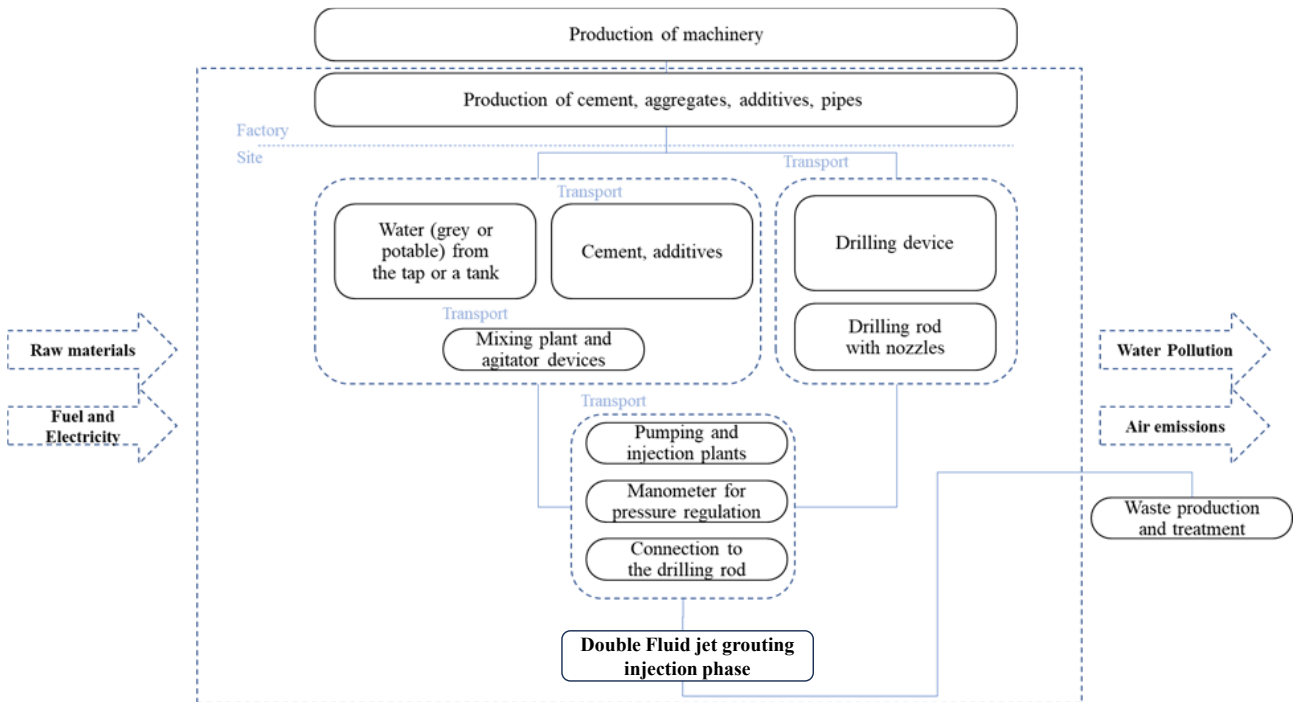


Fig. 18-13, Process scheme for LCA Analysis of the single fluid Jet Grouting technique.

The following graph shows the characterization step view. Again, and more than in the JG-SF case, the grout mix preparation plays a significant role in all categories.

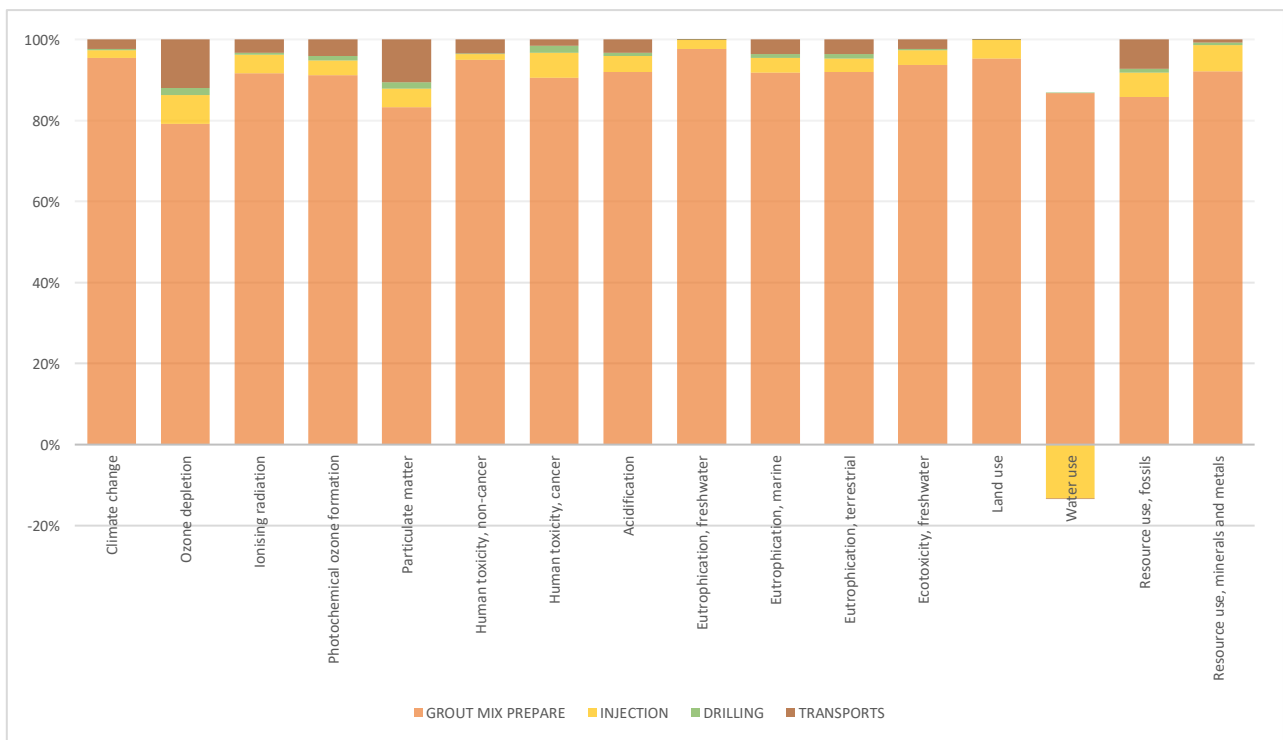


Fig. 18-14, Jet grouting with double fluid technique: impact, characterization view.

The next chart shows the normalization step results.

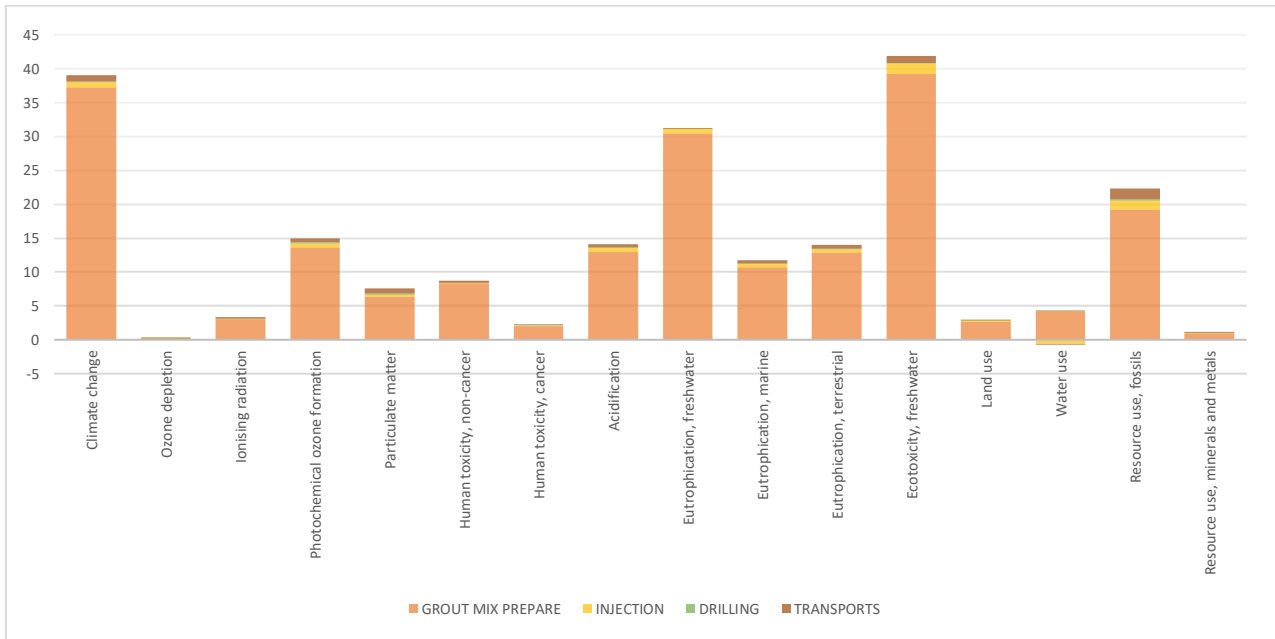


Fig. 18-15, Jet grouting with double fluid technique: impact, normalized view.

The following figure shows the weighting step results. The relevant impact categories are climate change, resource use, water resource depletion and air quality.

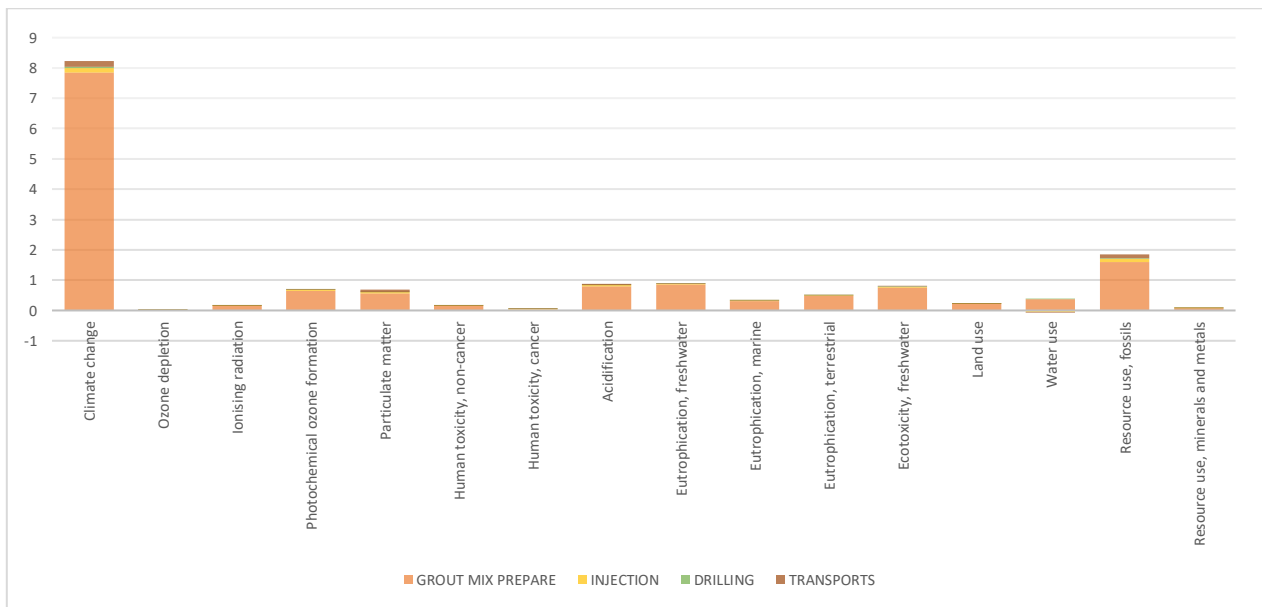


Fig. 18-16, Jet grouting with double fluid technique: impact, weighted view.

The single point plot, hereafter, shows how the grout mixing stage influence for JG-BF increases by 30% in comparison to the JG-SF process.

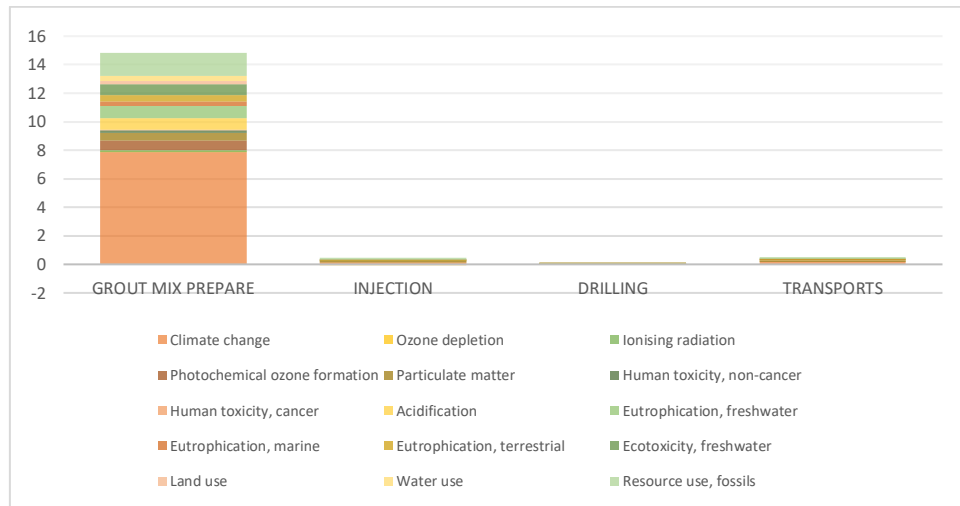


Fig. 18-17, Jet grouting with double fluid technique: impact, single score view.

The following table synthetizes the impact percentages.

Impact category	Unit	Total	GROUT MIX PREPARATION	INJECTION	DRILLING	TRANSPORTATION
Total	%	100,0	94,7	2,1	0,4	2,7
Climate change	%	52,4	50,4	0,8	0,1	1,0
Ozone depletion	%	0,1	0,1	0,0	0,0	0,0
Ionising radiation	%	1,0	0,9	0,0	0,0	0,0
Photochemical ozone formation	%	4,5	4,2	0,1	0,0	0,2
Particulate matter	%	4,1	3,5	0,2	0,1	0,4
Human toxicity, non-cancer	%	1,0	1,0	0,0	0,0	0,0
Human toxicity, cancer	%	0,3	0,3	0,0	0,0	0,0
Acidification	%	5,5	5,1	0,2	0,0	0,1
Eutrophication, freshwater	%	5,1	5,0	0,1	0,0	0,0
Eutrophication, marine	%	2,2	2,0	0,1	0,0	0,1
Eutrophication, terrestrial	%	3,3	3,0	0,1	0,0	0,1
Ecotoxicity, freshwater	%	5,2	4,9	0,2	0,0	0,1
Land use	%	1,5	1,4	0,1	0,0	0,0
Water use	%	1,8	2,1	-0,3	0,0	0,0
Resource use, fossils	%	11,5	10,1	0,6	0,1	0,7
Resource use, minerals and metals	%	0,5	0,5	0,0	0,0	0,0

Tab. 18-14, Jet grouting with double fluid technique: impact percentages, single point view.

The following table includes the raw data of the characterization step of the analysis, and the quantities of the relevant KPIs of each impact scenario.

Impact category	Unit	Total	GROUT MIX ONSITE	GROUT MIX INJECTION	DRILLING	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	384881,11190	370504,18160	5933,85681	1061,43874	7381,63475
Ozone depletion	kg CFC11 eq	0,01649	0,01352	0,00102	0,00024	0,00171
Ionising radiation	kBq U-235 eq	16427,32749	15259,96695	633,37203	64,79264	469,19588
Photochemical ozone formation	kg NMVOC eq	727,82150	674,01663	22,15360	7,03067	24,62059
Particulate matter	disease inc.	0,00525	0,00450	0,00021	0,00007	0,00048
Human toxicity, non-cancer	CTUh	0,00243	0,00233	0,00003	0,00000	0,00007
Human toxicity, cancer	CTUh	0,00004	0,00004	0,00000	0,00000	0,00000
Acidification	mol H+ eq	940,28272	877,69088	31,23462	5,79145	25,56577
Eutrophication, freshwater	kg P eq	56,42727	55,21239	1,17006	0,00727	0,03756

Eutrophication, marine	kg N eq	272,64744	253,76441	8,32506	2,35435	8,20361
Eutrophication, terrestrial	mol N eq	2968,13778	2769,17515	82,83944	25,88502	90,23817
Ecotoxicity, freshwater	CTUe	2211604,43314	2099513,03752	65116,98166	4940,25536	42034,15859
Land use	Pt	2867315,43898	2758965,16931	105438,95327	605,51049	2305,80592
Water use	m3 depriv.	47202,39712	54744,85318	-7524,67268	3,00501	-20,78839
Resource use, fossils	MJ	1712391,06681	1506762,46825	86456,86997	14602,90580	104568,82279
Resource use, minerals and metals	kg Sb eq	0,08396	0,07850	0,00448	0,00049	0,00051
Climate change - Fossil	kg CO2 eq	384090,76833	369741,75741	5906,45408	1061,35295	7381,20389
Climate change - Biogenic	kg CO2 eq	506,36111	482,54621	23,38793	0,06856	0,35841
Climate change - Land use and LU change	kg CO2 eq	283,98246	279,87798	4,01481	0,01722	0,07245

Tab. 18-15, Jet grouting with double fluid technique, impact percentages, characterization.

A focus on the grout mix preparation is shown in the following chart, confirming even more markedly, if compare to PG and JG-SF, the cement as the primary impactful source.

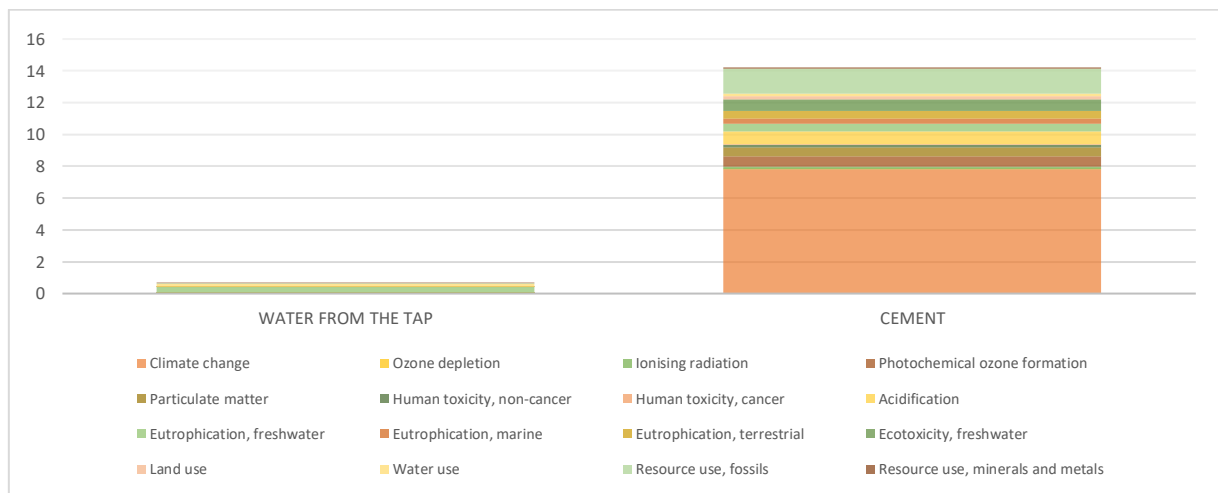


Fig. 18-18, Jet grouting with double fluid technique: grout mix preparation sub analysis, impact, characterization view.

JG-DF LCA sensitivity analysis

Main leverages to focus on, coming from the qualitative assessment with Envision and the outcomes of the ‘baseline’ LCA analysis:

- Energy: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation: Improving the rating of diesel transportation fueled trucks.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

A sensitivity run of the LCA model has been performed with these upgrades:

- Energy: use of an energy mix 70% fossil and 30% renewable (for example: hydroelectric power generated from run-off river systems). This energy mix will be implemented using the Ecoinvent string: Electricity, high voltage {IT}| electricity production, hydro, run-of-river | APOS, U.
- Cement: use of Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string: Cement, pozzolana and fly ash 11-35% {Europe without Switzerland}| market for cement, pozzolana and fly ash 11-35% | APOS, U.
- Steel: use iron coming from scrap, through the Ecoinvent string Iron scrap, unsorted {RoW}| steel production, electric, low-alloyed | APOS, U.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string: Transport, freight, lorry 16-32 metric ton, EURO6 {RER}| transport, freight, lorry 16-32 metric ton, EURO6 | APOS, U.

Results of the sensitivity run presented in the characterization format.

Impact category	Unit	Total	GROUT MIX ONSITE	GROUT MIX INJECTION	DRILLING	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	317711,94070	302260,17290	7184,21924	###	7206,10983
Ozone depletion	kg CFC11 eq	0,01432	0,01131	0,00109	###	0,00167
Ionising radiation	kBq U-235 eq	14234,40492	12811,15781	899,56071	###	458,89376
Photochemical ozone formation	kg NMVOC eq	587,47960	555,26164	15,83694	###	9,35036
Particulate matter	disease inc.	0,00438	0,00377	0,00013	###	0,00042
Human toxicity, non-cancer	CTUh	0,00202	0,00191	0,00004	###	0,00006
Human toxicity, cancer	CTUh	0,00004	0,00003	0,00000	###	0,00000
Acidification	mol H+ eq	776,69851	721,12876	35,51339	###	14,26493
Eutrophication, freshwater	kg P eq	51,01587	49,01057	1,96130	###	0,03674
Eutrophication, marine	kg N eq	221,46489	210,47957	6,25467	###	2,37631
Eutrophication, terrestrial	mol N eq	2388,48662	2276,17834	60,00236	###	26,42091
Ecotoxicity, freshwater	CTUe	1821227,78146	1680056,53433	94960,39462	###	41270,59712
Land use	Pt	2401473,87742	2221105,68448	177507,50501	###	2255,17744
Water use	m3 depriv.	44459,07300	49620,07971	-5143,67978	###	-20,33194
Resource use, fossils	MJ	1477694,64217	1253656,51352	107162,41409	###	102272,80866
Resource use, minerals and metals	kg Sb eq	0,07216	0,06490	0,00628	###	0,00050
Climate change - Fossil	kg CO2 eq	317043,97470	301639,03545	7137,89788	###	7205,68843
Climate change - Biogenic	kg CO2 eq	432,54448	392,56897	39,55641	###	0,35054
Climate change - Land use and LU change	kg CO2 eq	235,42151	228,56848	6,76495	###	0,07086

Tab. 18-16, Jet grouting with double fluid technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.

Here it follows on the left the table including the quantity of materials and energy necessary for the studied process, on the right, table with comparison between the baseline and sensitivity analysis outcomes. A 4% cut-off value has been applied to the weighted score.

Material/ Consumption	Quantity	Unit						
			Climate change	51,78%	317711,94034	384881,11064	kg CO2 eq	-17,45%
Cement	425000	kg	Ozone depletion	0,00%	0,01432	0,01649	kg CFC11 eq	-13,18%
Energy-Electricity	10998	kWh	Ionising radiation	0,00%	14234,40491	16427,32747	kBq U-235 eq	-13,35%
Energy-Diesel	1050	kWh	Photochemical ozone formation	4,33%	587,47960	727,82150	kg NMVOC eq	-19,28%
Steel	0	kg	Particulate matter	4,13%	0,00438	0,00525	disease inc.	-16,66%
T.A.M.	0	kg	Human toxicity, non-cancer	0,00%	0,00202	0,00243	CTUh	-17,18%
Sludge waste	283	m3	Human toxicity, cancer	0,00%	0,00004	0,00004	CTUh	-17,39%
Water	425000	kg	Acidification	5,43%	776,69851	940,28271	mol H+ eq	-17,40%
			Eutrophication, freshwater	5,57%	51,01587	56,42727	kg P eq	-9,59%
			Eutrophication, marine	0,00%	221,46489	272,64744	kg N eq	-18,77%
			Eutrophication, terrestrial	0,00%	2388,48662	2968,13777	mol N eq	-19,53%
			Ecotoxicity, freshwater	5,13%	1821227,77274	2211604,42657	CTUe	-17,65%
			Land use	0,00%	2401473,86489	2867315,42743	Pt	-16,25%
			Water use	0,00%	44459,07287	47202,39701	m3 depriv.	-5,81%
			Resource use, fossils	11,85%	1477694,64211	1712391,06776	MJ	-13,71%
			Resource use, minerals and metals	0,00%	0,07216	0,08396	kg Sb eq	-14,06%

Tab. 18-17, Jet grouting with double fluid technique: sensitivity analysis vs. baseline, total impact indicators, characterization.

18.5 LCA analysis of artificial ground freezing with closed system (using brine) AGF-BR

Input data

The following table includes the main data for the case of closed system artificial ground freezing.

ITEM	INPUT	VALUE	UNIT	ECOINVENT DATABASE REFERENCE
Brine use	Product	4915	Mass (kg)	Sodium chloride, brine solution
	Transport	442350	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U (4915kg * 90km)
	Waste	4915	Mass (kg)	Wastewater, average {Europe without Switzerland} market for wastewater, average APOS, U
PVC pipes for thermal probes	Product	0.7	Mass (kg)	Polyvinylchloride, bulk polymerised {RER} polyvinylchloride production, bulk polymerisation APOS, U
	Process	0.7	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
Thermocouples for thermal probes	Product	3.5	Mass (kg)	Copper {RER} production, primary APOS, U
	Transport	378	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U (3.5+0.7)kg * 90km)
Diesel driller (for sheath)	Consumption	43.2	Duration (hr)	Machine operation, diesel, >= 74.57, underground mining (GLO), market for APOS, U
	Product	6500	Mass (kg)	/
	Transport	585000	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (6500kg * 90km)
Electric agitator (for sheath)	Consumption	2.2	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U
	Product	350	Mass (kg)	/
	Transport	31500	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (350kg * 90km)
Electric injector (for sheath)	Consumption	44	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U
	Product	600	Mass (kg)	/
	Transport	54000	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (600kg * 90km)
Cement	Product	2111	Mass (kg)	Cement, Portland {CH} market for APOS, U
	Transport	189990	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (2111kg * 90km)
Bentonite	Product	192	Mass (kg)	Bentonite {RoW} quarry operation APOS, U
	Transport	206*207 = 42642	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U (192kg * 90km)
Water	Potable water from the tap	4094	Mass (kg)	Tap water {Europe without Switzerland} market for APOS, U
	Transport	0	Mass*Distance (kg*km)	/
Freezing probes	Product	4039	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U
	Process	4039	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Product	120	Mass (kg)	Polyvinylchloride, bulk polymerised {RER} polyvinylchloride production, bulk polymerisation APOS, U
	Process	120	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
	Transport	374310	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U ((4039+120)kg * 90km)
Connection pipe between freezing probes. Steel pipe and thermal insulation	Product (steel)	581	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U
	Process	581	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Product (insul.)	58	Mass (kg)	Synthetic rubber {RER} production APOS, U
	Process	58	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
	Transport	57510	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport APOS, U ((581+58)kg * 90km)
Connection brine tank with probes network. Steel pipe and thermal insulation	Product (steel)	1210	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U
	Process	1210	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Product (insul)	120	Mass (kg)	Synthetic rubber {RER} production APOS, U
	Process	120	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
	Transport	119700	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U ((1210+120)kg * 90km)
Refrigeration for brine freezing first time	Consumption	48886	Energy (kWh)	Electricity, medium voltage {IT} market for APOS, U
Refrigeration for brine freezing maintenance	Consumption	29331	Energy (kWh)	Electricity, medium voltage {IT} market for APOS, U

Tab. 18-18, Artificial ground freezing with brine technique: LCA analysis input data.

AGF-BR LCA analysis

The following figure shows the process scheme implemented for the AGF-BR treatment LCA analysis

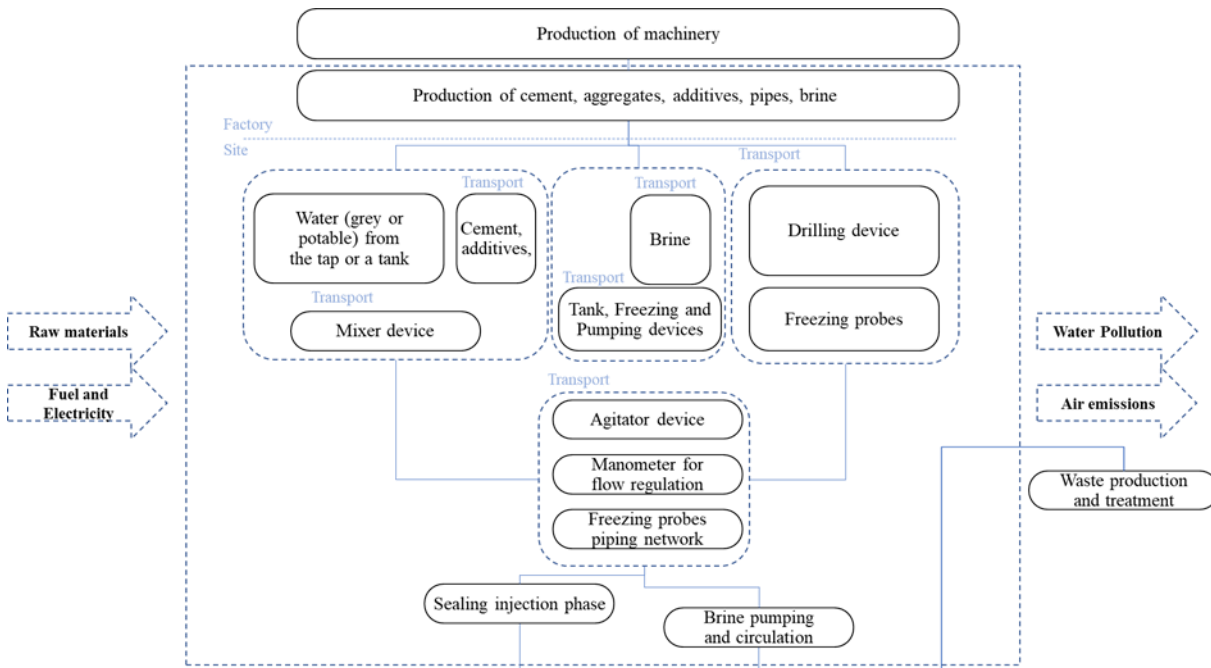


Fig. 18-19, Artificial ground freezing with brine technique: Process scheme for LCA Analysis.

The following graph shows the characterization step view. Differently from the “grouting” treatments, the significance of impact is mostly divided between the freezing phase and the drilling phase, that includes the metallic freezing pipes provision.

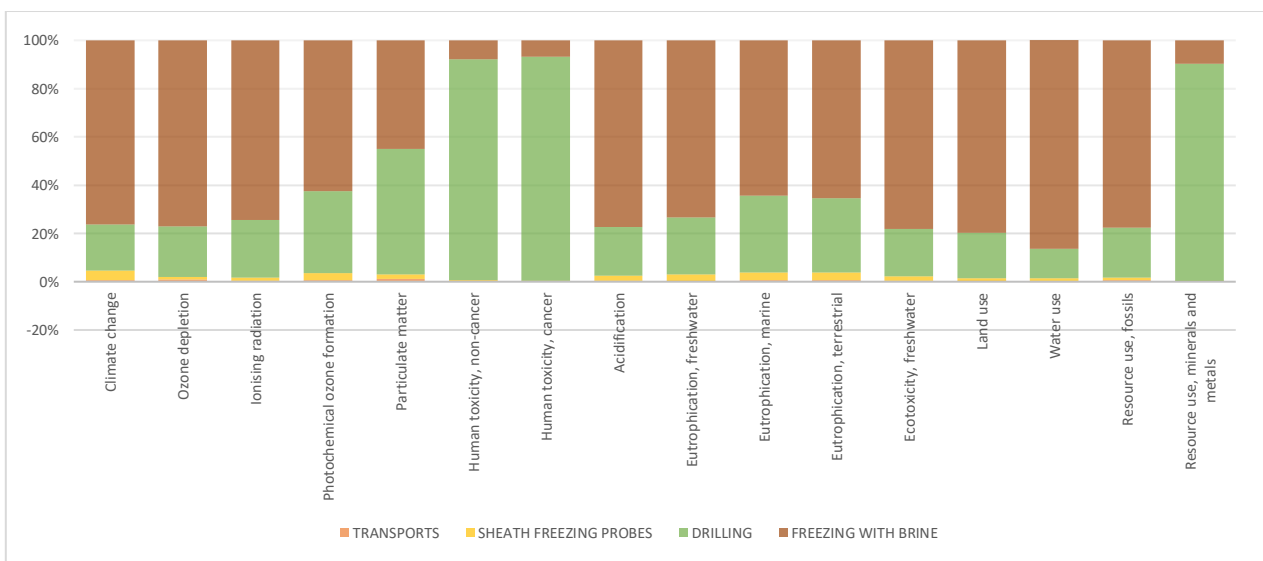


Fig. 18-20, Artificial ground freezing with brine technique: impact, characterization view.

The next chart shows the normalization step results, confirming and better distinguishing the impactful role of freezing probes (and distribution pipes) as well as of the freezing plant during the operation.

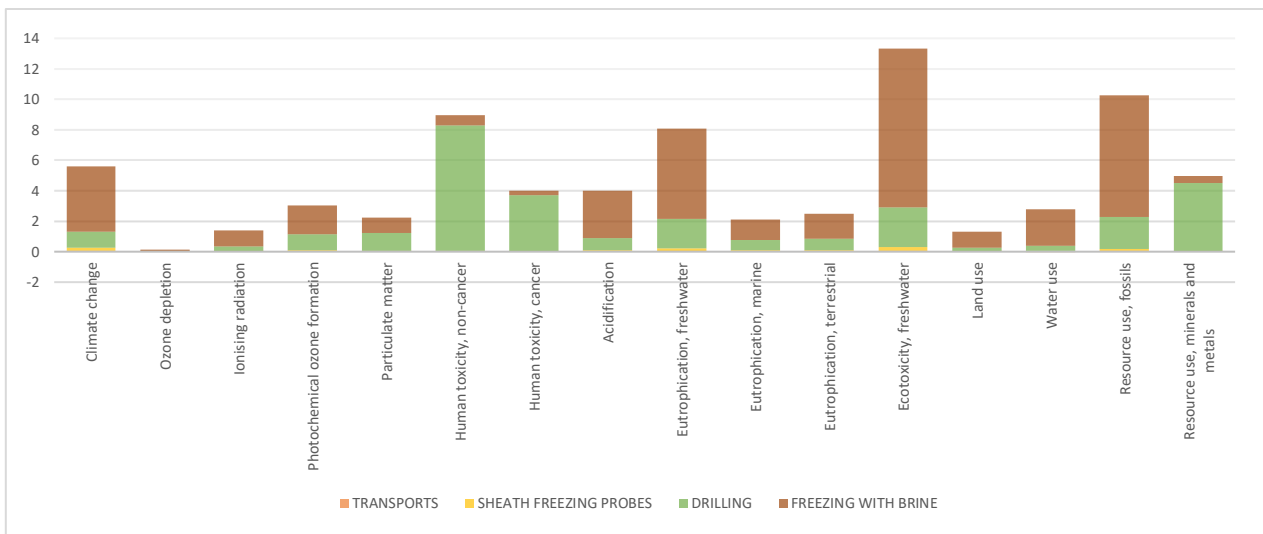


Fig. 18-21, Artificial ground freezing with brine technique: impact, normalization view.

The following figure shows the weighting step results. The freezing phase plays the most relevant role in the weighting plot due to its energy needs, as well it emerges the effect on the resources use.

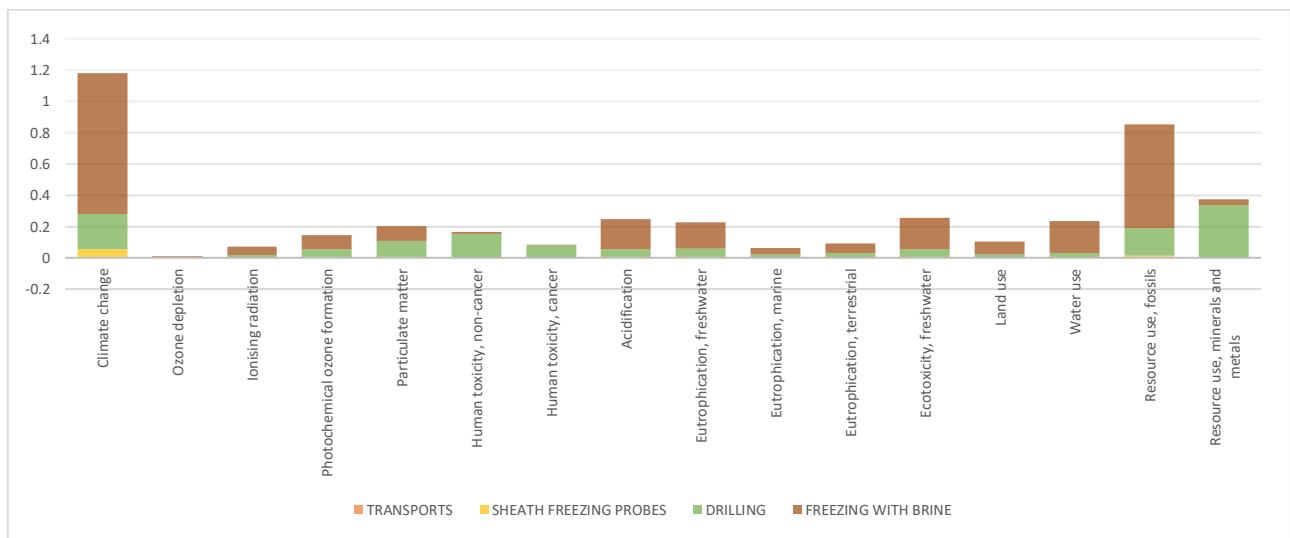


Fig. 18-22, Artificial ground freezing with brine technique: impact, weighted view.

The single point plot, hereafter, shows how the balance between the AGF-BR phases: the freezing has a double impact with respect to the drilling stage. The sheath freezing probes stages, referred to the grouting carried out in order to embed the freezing probes in the ground, produces an almost negligible impact, anyhow attributable to the cement necessary for this operation.

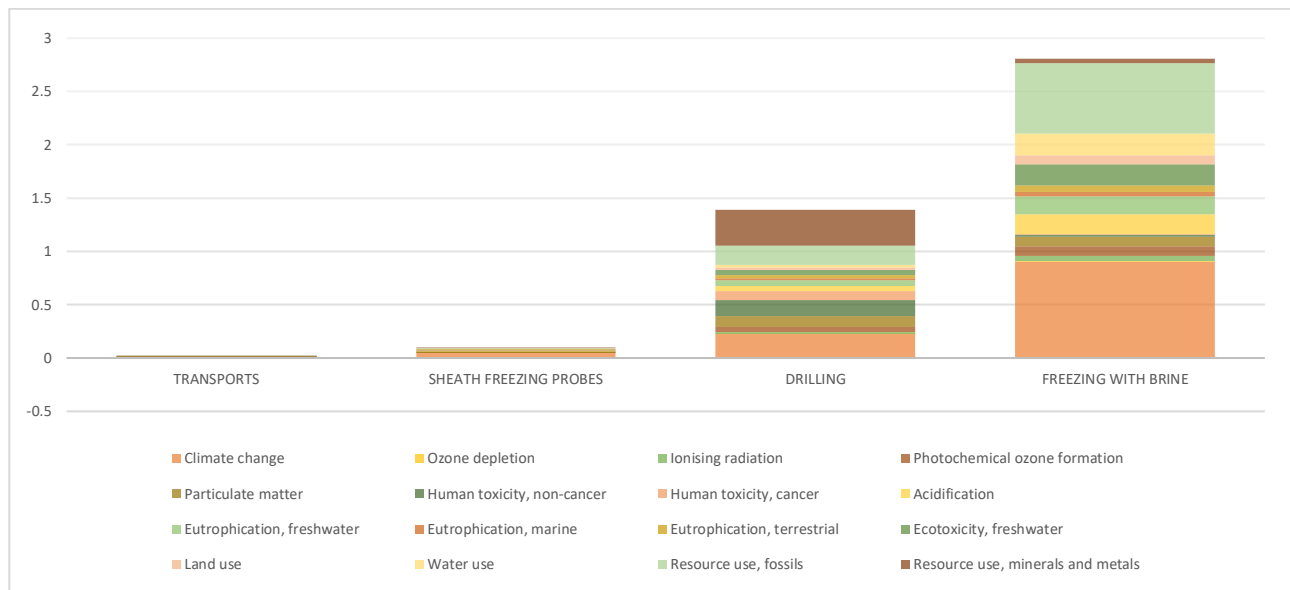


Fig. 18-23, Artificial ground freezing with brine technique: impact, single score view.

Referring to the AGF-BR it has be pointed out what it follows:

- the most influencing phase is the freezing process involving brine, that circulates during both the freezing and the maintenance phase, being the latter operating during the shaft excavation activities.
- the “drilling phase” has significant importance because it includes the effect of the steel production for the freezing probes; thus, contributing to about one-third of the entire impact. This impact is mostly focused in the depletion of resources.

The next table shows the single point results in terms of percentage: the freezing phase scores 65,1% of the impacts while drilling positions around 32,2%.

The following table synthetizes the impact percentages.

Impact category	Unit	Total	TRANSPORTATION	SHEATH	DRILLING PROBES	FREEZING WITH BRINE
Total	%	100,0	0,4	2,2	32,2	65,1
Climate change	%	27,4	0,1	1,1	5,2	20,9
Ozone depletion	%	0,2	0,0	0,0	0,0	0,1
Ionising radiation	%	1,6	0,0	0,0	0,4	1,2
Photochemical ozone formation	%	3,3	0,0	0,1	1,1	2,1
Particulate matter	%	4,7	0,1	0,1	2,4	2,1
Human toxicity, non-cancer	%	3,8	0,0	0,0	3,5	0,3
Human toxicity, cancer	%	2,0	0,0	0,0	1,8	0,1
Acidification	%	5,7	0,0	0,1	1,2	4,5
Eutrophication, freshwater	%	5,3	0,0	0,2	1,2	3,9
Eutrophication, marine	%	1,4	0,0	0,0	0,5	0,9
Eutrophication, terrestrial	%	2,2	0,0	0,1	0,7	1,4
Ecotoxicity, freshwater	%	5,9	0,0	0,1	1,2	4,6
Land use	%	2,4	0,0	0,0	0,5	1,9
Water use	%	5,5	0,0	0,1	0,7	4,7
Resource use, fossils	%	19,8	0,1	0,2	4,1	15,4
Resource use, minerals and metals	%	8,7	0,0	0,0	7,8	0,8

Tab. 18-19, Artificial ground freezing with brine technique: impact percentages, single point view.

The following table includes the raw data of the characterization step of the analysis, and the quantities of the relevant KPIs of each impact scenario.

Impact category	Unit	Total	MATERIAL EQUIPMENT TRANSPORTATION	AND SHEATH ON SITE	DRILLING PIPES	AND BRINE FREEZING
Climate change	kg CO2 eq	45377,18315	242,7359361	1877,243278	8585,983881	34671,22006
Ozone depletion	kg CFC11 eq	0,006848155	5,61407E-05	7,26463E-05	0,001444037	0,005275331
Ionising radiation	kBq U-235 eq	5918,79628	15,38263566	82,07437996	1423,606748	4397,732517
Photochemical ozone formation	kg NMVOC eq	122,4566282	0,803212783	3,473374011	41,66019995	76,51984147
Particulate matter	disease inc.	0,001330483	1,67876E-05	2,40639E-05	0,00069076	0,000598872
Human toxicity, non-cancer	CTUh	0,002061765	2,40537E-06	1,18214E-05	0,001885232	0,000162307
Human toxicity, cancer	CTUh	6,75877E-05	1,97561E-08	2,08519E-07	6,27511E-05	4,60835E-06
Acidification	mol H+ eq	221,8682917	0,835449234	4,573101534	44,67554044	171,7842005
Eutrophication, freshwater	kg P eq	12,98631933	0,00123149	0,375140148	3,079358082	9,530589613
Eutrophication, marine	kg N eq	41,12720569	0,267496982	1,345759929	13,00799953	26,50594925
Eutrophication, terrestrial	mol N eq	443,2854945	2,941807814	14,25495559	136,288264	289,8004671
Ecotoxicity, freshwater	CTUe	567979,1944	1400,813236	11109,02558	111788,5785	443680,777
Land use	Pt	1073906,938	75,5960863	14607,63262	202643,3999	856580,3093
Water use	m3 depriv.	31698,83098	-0,681549364	422,1306245	3859,258216	27418,12369
Resource use, fossils	MJ	667564,1661	3428,299718	8045,791087	137221,7437	518868,3315
Resource use, minerals and metals	kg Sb eq	0,316177939	1,66179E-05	0,000704961	0,284793487	0,030662873
Climate change - Fossil	kg CO2 eq	45124,86041	242,7218103	1873,181369	8561,034541	34447,92269
Climate change - Biogenic	kg CO2 eq	209,8059394	0,011750481	2,634568781	16,68773293	190,4718872
Climate change - Land use and LU change	kg CO2 eq	42,5168036	0,002375362	1,427340138	8,261607607	32,82548049

Tab. 18-20, Artificial ground freezing with brine technique: impact percentages, characterization.

AGF-BR LCA sensitivity analysis

The requirements/suggestions coming from the qualitative assessment with Envision (i.e. the main leverages to focus on) are:

- Energy: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation: Improving the rating of diesel transportation fueled trucks.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

A sensitivity run of the LCA model has been performed with these upgrades:

- Energy: use an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string: Electricity, high voltage {IT}| electricity production, hydro, run-of-river | APOS, U.
- Cement: use Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string: Cement, pozzolana and fly ash 11-35% {Europe without Switzerland}| market for cement, pozzolana and fly ash 11-35% | APOS, U.
- Steel: use iron coming from scrap, through the Ecoinvent string Iron scrap, unsorted {RoW}| steel production, electric, low-alloyed | APOS, U.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string: Transport, freight, lorry 16-32 metric ton, EURO6 {RER}| transport, freight, lorry 16-32 metric ton, EURO6 | APOS, U.

Results of the sensitivity run presented in the characterization format.

Impact category	Unit	Total	MATERIAL AND EQUIPMENT TRANSPORTATION	SHEATH ON SITE	DRILLING AND PIPES	BRINE FREEZING
Climate change	kg CO2 eq	33378,19348	235,598208	1531,0739	7269,934871	24341,5865
Ozone depletion	kg CFC11 eq	0,00506975	5,51578E-05	6,05916E-05	0,001253951	0,00370005
Ionising radiation	kBq U-235 eq	4048,455192	15,11329423	69,00812	862,4393749	3101,894403
Photochemical ozone formation	kg NMVOC eq	92,56538386	0,307002704	2,867628884	35,66509601	53,72565626
Particulate matter	disease inc.	0,000936553	1,46919E-05	2,03252E-05	0,00048016	0,000421376
Human toxicity, non-cancer	CTUh	0,000771164	2,23767E-06	9,70046E-06	0,000645037	0,000114189
Human toxicity, cancer	CTUh	2,95595E-05	1,79687E-08	1,74147E-07	2,61187E-05	3,24872E-06
Acidification	mol H+ eq	161,3159933	0,469318642	3,759808195	36,45412085	120,6327456
Eutrophication, freshwater	kg P eq	9,081065135	0,001209927	0,342375539	2,019494024	6,717985646
Eutrophication, marine	kg N eq	31,09724952	0,077992434	1,125266613	11,26099949	18,63299098
Eutrophication, terrestrial	mol N eq	333,1639604	0,866474537	11,74603604	117,1154798	203,4359701
Ecotoxicity, freshwater	CTUe	412217,0818	1380,838357	8933,400654	90437,50668	311465,3361
Land use	Pt	785600,0187	74,27244042	11757,3747	173634,7601	600133,6115
Water use	m3 depriv.	21746,53226	-0,669615808	390,8517903	2486,777217	18869,57287
Resource use, fossils	MJ	484622,7724	3368,27208	6681,009725	110120,5609	364452,9297
Resource use, minerals and metals	kg Sb eq	0,246833485	1,63269E-05	0,000631147	0,22454543	0,021640582
Climate change - Fossil	kg CO2 eq	33199,68553	235,5843295	1527,760287	7251,290541	24185,05037
Climate change - Biogenic	kg CO2 eq	147,7653661	0,011544737	2,147911009	12,16406929	133,4418411
Climate change - Land use and LU change	kg CO2 eq	30,74258691	0,002333771	1,16570245	6,480260544	23,09429015

Tab. 18-21, Artificial ground freezing with brine technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.

Here it follows on the left the table including the quantity of materials and energy necessary for the studied process, on the right, table with comparison between the baseline and sensitivity analysis outcomes. A 4% cut-off value has been applied to the weighted score.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	2111	kg	Climate change	28,35%	33378,19348	45377,18315	kg CO2 eq	-26,44%
Energy-Electricity	78278,6	kWh	Ozone depletion	0,00%	0,00507	0,00685	kg CFC11 eq	-25,97%
Energy-Diesel	3240	kWh	Ionising radiation	0,00%	4048,45519	5918,79628	kBq U-235 eq	-31,60%
Steel	5830	kg	Photochemical ozone formation	0,00%	92,56538	122,45663	kg NMVOC eq	-24,41%
T.A.M.	0	kg	Particulate matter	4,60%	0,00094	0,00133	disease inc.	-29,61%
Bentonite	192	kg	Human toxicity, non-cancer	0,00%	0,00077	0,00206	CTUh	-62,60%
Brine waste	4915	kg	Human toxicity, cancer	0,00%	0,00003	0,00007	CTUh	-56,26%
Sludge waste	0	m3	Acidification	5,88%	161,31599	221,86829	mol H+ eq	-27,29%
Water	4094	0	Eutrophication, freshwater	5,17%	9,08107	12,98632	kg P eq	-30,07%
			Eutrophication, marine	0,00%	31,09725	41,12721	kg N eq	-24,39%
			Eutrophication, terrestrial	0,00%	333,16396	443,28549	mol N eq	-24,84%
			Ecotoxicity, freshwater	6,06%	412217,08182	567979,19438	CTUe	-27,42%
			Land use	0,00%	785600,01874	1073906,93792	Pt	-26,85%
			Water use	5,27%	21746,53226	31698,83098	m3 depriv.	-31,40%
			Resource use, fossils	20,25%	484622,77241	667564,16608	MJ	-27,40%
			Resource use, minerals and metals	9,56%	0,24683	0,31618	kg Sb eq	-21,93%

Tab. 18-22, Artificial ground freezing with brine technique: sensitivity analysis vs. baseline, total impact indicators, characterization.

18.6 LCA analysis artificial ground freezing with open system (using liquid nitrogen) AGF-LN

Input data

EM	INPUT	VALUE	UNIT	SIMAPRO ECOINVENT 3 IDENTIFIER
Liquid nitrogen (initial freezing)	Product	917.7	Mass (kg)	Nitrogen, liquid {RER} market for APOS, U (1600lt/m3 * 717m3 frozen ground * 0.8kg/m3 density / 1000)
	Transport	917.7*90 =82620	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, EURO5 {RER} transport, freight, lorry 16-32 metric ton, EURO5 APOS, U (716.8kg * 90km)
	Waste	917.7	Mass (kg)	Nitrogen, atmospheric
Liquid nitrogen (maintenance 30dd)	Product	860.4	Mass (kg)	Nitrogen, liquid {RER} market for APOS, U (50lt/m3/dd * 717m3 frozen ground * 0.8kg/m3 density / 1000 * 30dd)
	Transport	77436	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, EURO5 {RER} transport, freight, lorry 16-32 metric ton, EURO5 APOS, U (860.4kg * 90km)
	Waste	860.4	Mass (kg)	Nitrogen, atmospheric
PVC pipes for thermal probes	Product	0.7	Mass (kg)	Polyvinylchloride, bulk polymerised {RER} polyvinylchloride production, bulk polymerisation APOS, U
	Process	0.7	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
Thermocouples for thermal probes	Product	3.5	Mass (kg)	Copper {RER} production, primary APOS, U
	Transport	(6.6+2.8)*30 =281.5	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U ((0.7+3.5) * 90km)
Diesel drilling machinery	Consumption	3240	Duration (hr)	Machine operation, diesel, >= 74.57 kW, steady-state {GLO} machine operation, diesel, >= 74.57 kW, steady-state APOS, U (32hr * 1.35)
	Product	6500	Mass (kg)	/
	Transport	585000	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (6500kg * 90km)
Electric agitator (for sheath)	Consumption	17.6	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U (2.2kW * 8hr)
	Product	350	Mass (kg)	/
	Transport	31500	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (350kg * 90km)
Electric injector (for sheath)	Consumption	44	Energy (kWh)	Electricity, medium voltage {IT} market APOS, U (5.5kW * 8hr)
	Product	600	Mass (kg)	/
	Transport	54000	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (600kg * 90km)
Cement (for sheath)	Product	2111	Mass (kg)	Cement, Portland {CH} market for APOS, U
	Transport	189990	Mass*Distance (kg*km)	Transport, freight, lorry >32 metric ton, euro5 {RER} market for transport, freight, lorry >32 metric ton, EURO5 APOS, U (2111kg * 90km)
Bentonite (for sheath)	Product	192	Mass (kg)	Bentonite {RoW} quarry operation APOS, U
	Transport	17280	Mass*Distance (kg*km)	Transport, freight, lorry 3.5-7.5 metric ton, euro5 {RER} market for transport, freight, lorry 3.5-7.5 metric ton, EURO5 APOS, U (192kg * 90km)
Water (for sheath)	Water (potable) from the tap	4094	Mass (kg)	Tap water {Europe without Switzerland} market for APOS, U
	Transport	0	Mass*Distance (kg*km)	/
Freezing probes	Product	4039	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U
	Process	4039	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Transport	363510	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U (4039kg * 90km)
Probe connection pipe network. Steel pipes (stainless steel) wrapped in thermal insulation	Product (steel)	581	Mass (kg)	Steel, low-alloyed {RER} steel production, electric, low-alloyed APOS, U
	Process	581	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Product (insul.)	57.6	Mass (kg)	Synthetic rubber {RER} production APOS, U
	Process	57.6	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
	Transport	57474	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, APOS, U (581+57.6)kg * 90km)
Connection between probes and nitrogen tank. Steel pipe (stainless steel) wrapped in thermal insulation	Product (steel)	1210	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U
	Process	1210	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Product (insul.)	120	Mass (kg)	Synthetic rubber {RER} production APOS, U
	Process	120	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
	Transport	119700	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport, freight, lorry 16-32 metric ton, EURO5 APOS, U ((1210+120)kg * 90km)
Connection between probes and nitrogen chimney. Steel pipe (stainless steel) wrapped in thermal insulation	Product (steel)	1210	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U
	Process	1210	Mass (kg)	Sheet rolling, steel {RER} processing APOS, U
	Product (insul.)	120	Mass (kg)	Synthetic rubber {RER} production APOS, U
	Process	120	Mass (kg)	Extrusion, plastic pipes {RER} extrusion, plastic pipes APOS, U
Nitrogen discharge chimney (steel)	Product	10	Mass (kg)	Steel, low-alloyed {GLO} market for APOS, U

Process	10	Massa (kg)	Sheet rolling, steel {RER} processing APOS, U
Transport	900	Mass*Distance (kg*km)	Transport, freight, lorry 16-32 metric ton, euro5 {RER} market for transport APOS, U (10kg * 90km)

Tab. 18-23, Artificial ground freezing with nitrogen technique: LCA analysis input data for freezing with liquid nitrogen.

AGF-LN LCA analysis

The following figure shows the process scheme implemented for the AGF-LN treatment LCA analysis

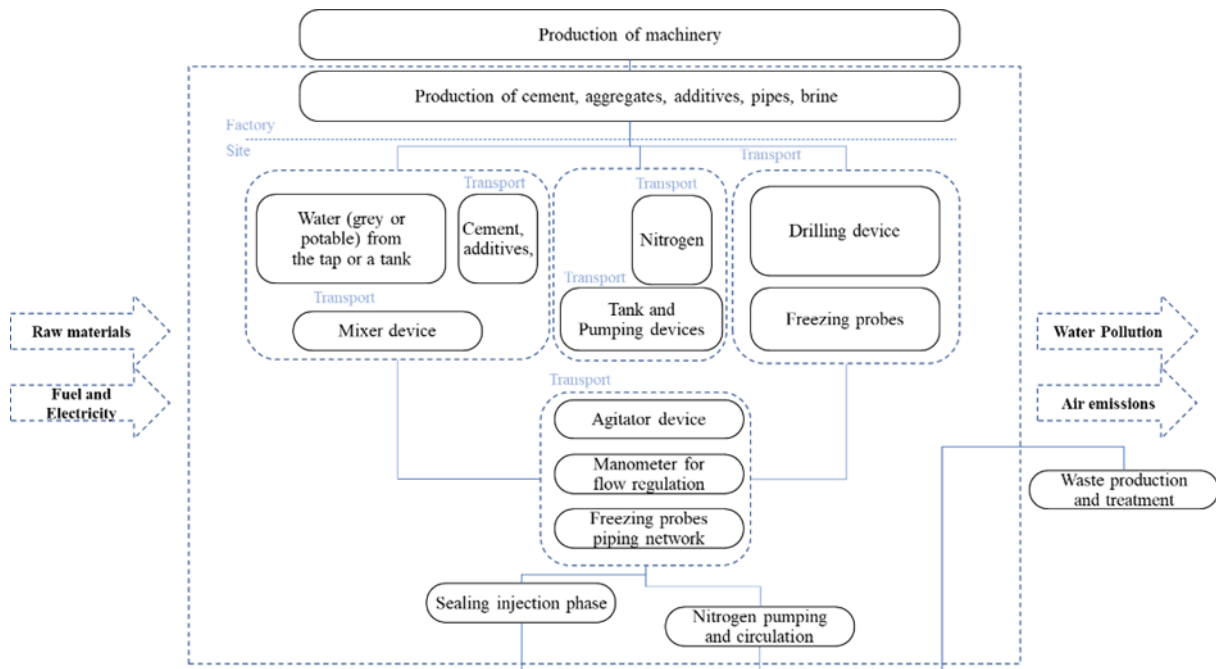


Fig. 18-24, Artificial ground freezing with nitrogen technique: LCA Process scheme.

The use of nitrogen in ground freezing, with the open circuit method, is anticipated to result in a decreased overall effect compared to the use of brine due to the significant decrease in equipment requirements.

The following graph shows the characterization step view. The primary focus is on the drilling phase, that includes both probes provision as well as the energy required for drilling, being the more significant in terms of impact.

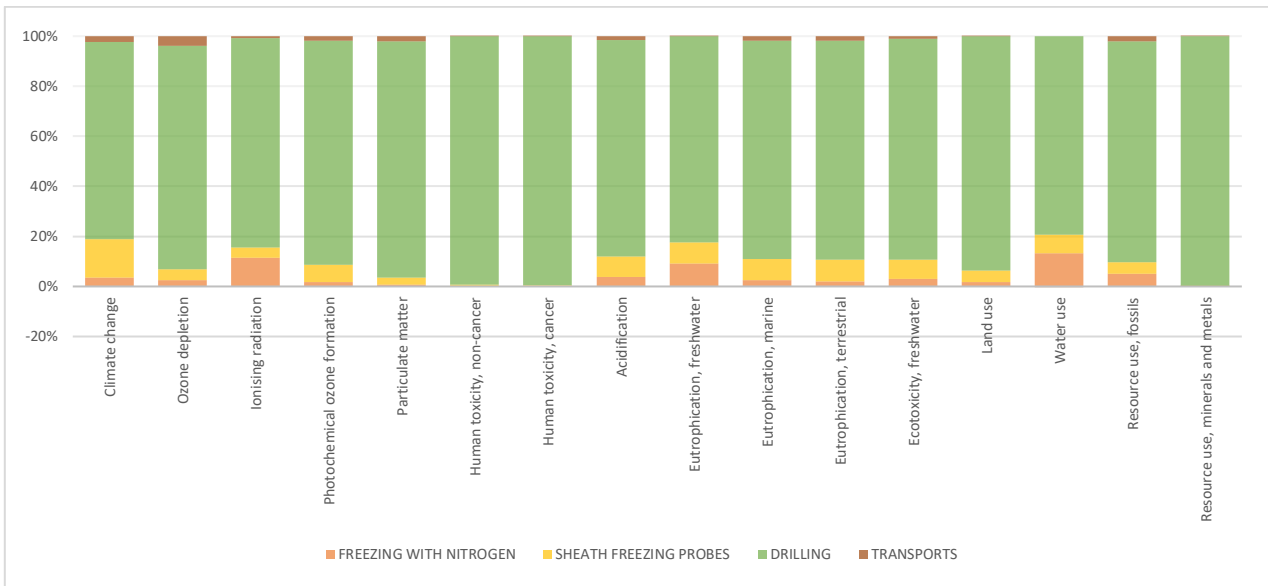


Fig. 18-25, Artificial ground freezing with nitrogen technique: impact, characterization view.

The next chart shows the normalization step results. The highlighted categories that have been normalized pertain to the steel production process and the energy consumption associated with drilling equipment.

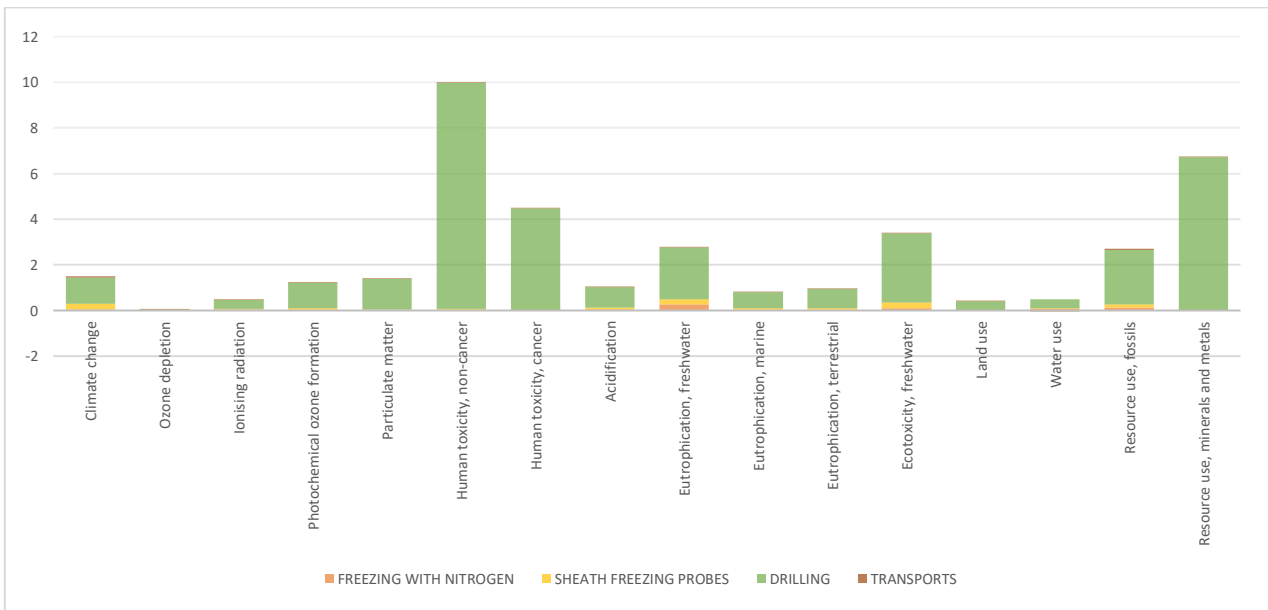


Fig. 18-26, Artificial ground freezing with nitrogen technique: impact, normalized view.

The following figure shows the weighting step results, confirming the phenomenon.

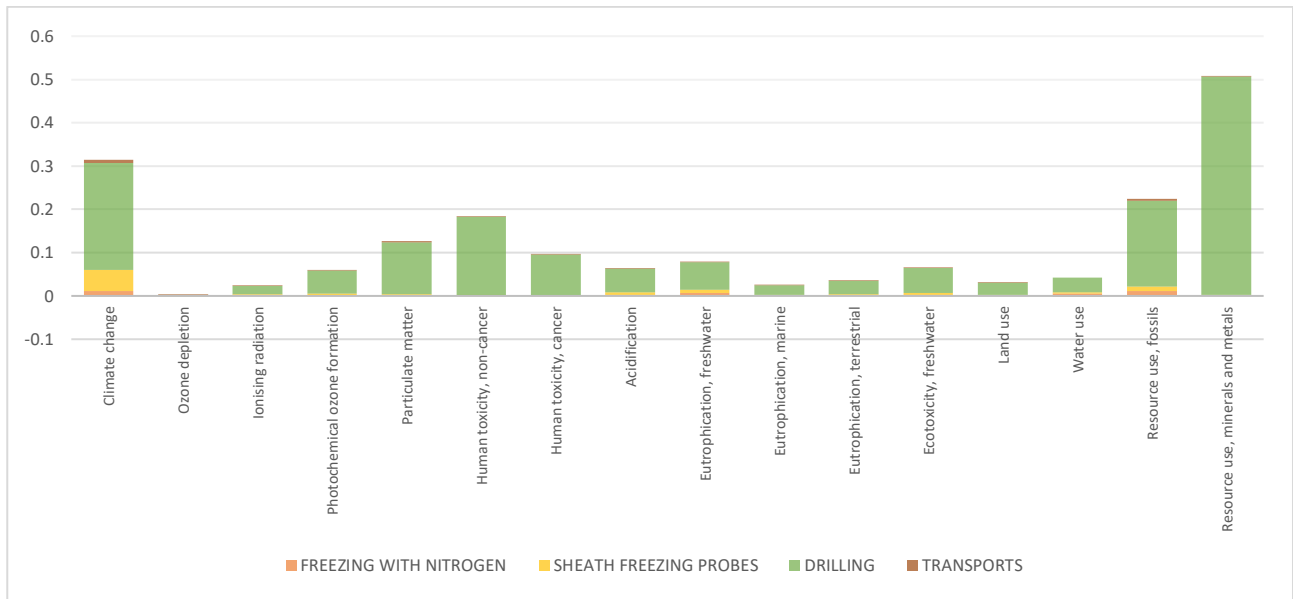


Fig. 18-27, Artificial ground freezing with nitrogen technique: impact, weighted view.

The single point plot, hereafter, shows how the drilling category is the most impactful, while the use of the nitrogen as coolant releasable directly to the open air reduces definitely the effect of the freezing step impact.

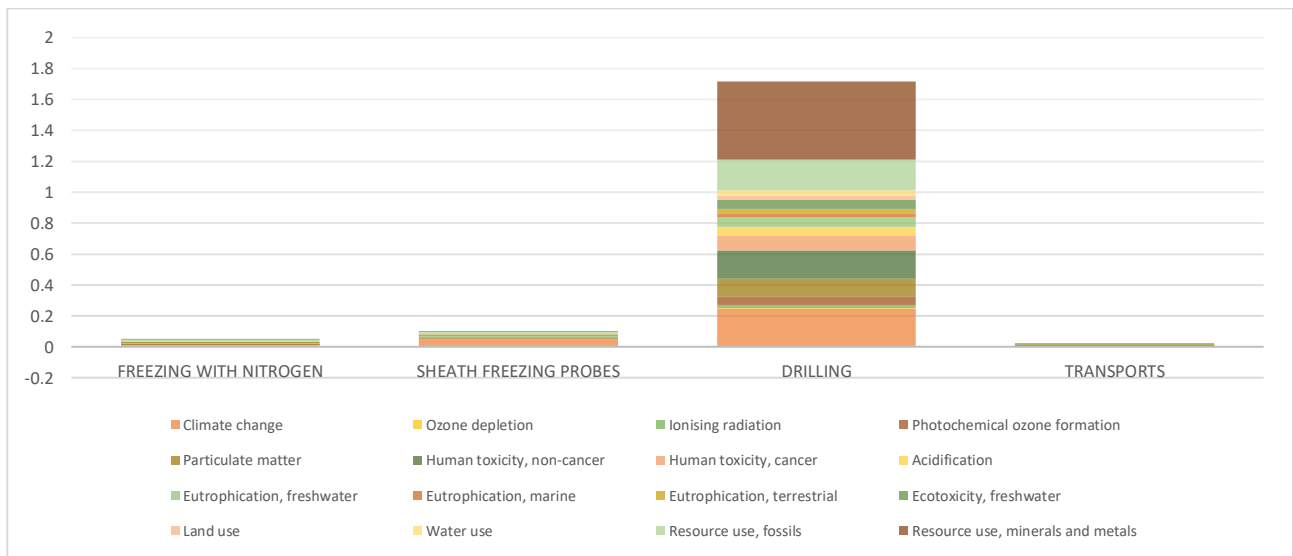


Fig. 18-28, Artificial ground freezing with nitrogen technique: impact, single point view.

Due also to the fact that in the indirect method the refrigerant fluid comes to the working site already in the firm of liquid nitrogen, the steel piping plays a major role in site impact definition, with a 91.4% percentage.

The following table synthetizes the impact percentages.

Impact category	Unit	Total	FREEZING WITH NITROGEN	SHEATH	DRILLING	TRANSPORTATION
Total	%	100,0	2,5	5,1	91,4	1,0
Climate change	%	16,7	0,6	2,6	13,2	0,4
Ozone depletion	%	0,1	0,0	0,0	0,1	0,0
Ionising radiation	%	1,3	0,1	0,1	1,1	0,0
Photochemical ozone formation	%	3,2	0,1	0,2	2,9	0,1
Particulate matter	%	6,7	0,0	0,2	6,3	0,1

Human toxicity, non-cancer	%	9,8	0,0	0,1	9,7	0,0
Human toxicity, cancer	%	5,1	0,0	0,0	5,1	0,0
Acidification	%	3,4	0,1	0,3	3,0	0,1
Eutrophication, freshwater	%	4,1	0,4	0,3	3,4	0,0
Eutrophication, marine	%	1,3	0,0	0,1	1,1	0,0
Eutrophication, terrestrial	%	1,9	0,0	0,2	1,6	0,0
Ecotoxicity, freshwater	%	3,5	0,1	0,3	3,1	0,0
Land use	%	1,7	0,0	0,1	1,6	0,0
Water use	%	2,3	0,3	0,2	1,8	0,0
Resource use, fossils	%	12,0	0,6	0,5	10,6	0,3
Resource use, minerals and metals	%	27,0	0,0	0,0	26,9	0,0

Tab. 18-24, Artificial ground freezing with nitrogen technique: impact percentages, single point view.

The following table includes the raw data of the characterization step of the analysis, and the quantities of the relevant KPIs of each impact scenario.

Impact category	Unit	Total	NITROGEN FREEZING	SHEATH	DRILLING AND PIPES	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	12081,53160	414,17318	1877,24328	9522,97077	267,14437
Ozone depletion	kg CFC11 eq	0,00165	0,00004	0,00007	0,00148	0,00006
Ionising radiation	kBq U-235 eq	2020,55653	231,73892	82,07438	1690,12732	16,61591
Photochemical ozone formation	kg NMVOC eq	50,96231	0,93305	3,47337	45,68437	0,87152
Particulate matter	disease inc.	0,00084	0,00001	0,00002	0,00079	0,00002
Human toxicity, non-cancer	CTUh	0,00229	0,00000	0,00001	0,00227	0,00000
Human toxicity, cancer	CTUh	0,00008	0,00000	0,00000	0,00008	0,00000
Acidification	mol H+ eq	57,45410	2,24961	4,57310	49,72320	0,90819
Eutrophication, freshwater	kg P eq	4,46386	0,41153	0,37514	3,67545	0,00174
Eutrophication, marine	kg N eq	16,08678	0,40070	1,34576	14,04999	0,29033
Eutrophication, terrestrial	mol N eq	167,50348	3,50403	14,25496	146,55066	3,19384
Ecotoxicity, freshwater	CTUe	145972,33367	4376,15980	11109,02560	128983,86695	1503,28132
Land use	Pt	322307,70154	5799,40722	14607,63264	301811,07803	89,58365
Water use	m3 depriv.	5710,29778	756,07622	422,13063	4532,60164	-0,51071
Resource use, fossils	MJ	175307,43707	8708,35920	8045,79110	154838,02873	3715,25804
Resource use, minerals and metals	kg Sb eq	0,42718	0,00076	0,00070	0,42569	0,00003
Climate change - Fossil	kg CO2 eq	12045,89053	412,01281	1873,18138	9493,56789	267,12845
Climate change - Biogenic	kg CO2 eq	23,22929	1,05483	2,63457	19,52667	0,01322
Climate change - Land use and LU change	kg CO2 eq	12,41178	1,10554	1,42734	9,87620	0,00270

Tab. 18-25, Artificial ground freezing with nitrogen technique: impact percentages, characterization.

AGF-LN LCA sensitivity analysis

The requirements/suggestions coming from the qualitative assessment with Envision (i.e. the main leverages to focus on) are:

- Energy: Improve consumption (a) reducing power production from diesel engines, (b) using electricity coming from providers that use a mix of production that includes renewable sources.
- Transportation: Improving the rating of diesel transportation fueled trucks.
- Cement: reduce the content in clinker (through pozzolana or fly ash additions).

To the aim of including these sustainability upgrades with respect to the original LCA baseline just described in detail, another sensitivity run of the LCA model has been performed with these modifications:

- Energy: use an energy mix 70% fossil and 30% renewable (for instance hydro coming from run off river generation), through the Ecoinvent string: Electricity, high voltage {IT}| electricity production, hydro, run-of-river | APOS, U.
- Cement: use Pozzolana-based cement instead of Portland-based cement, through the Ecoinvent string: Cement, pozzolana and fly ash 11-35% {Europe without Switzerland}| market for cement, pozzolana and fly ash 11-35% | APOS, U.
- Steel: use iron coming from scrap, through the Ecoinvent string Iron scrap, unsorted {RoW}| steel production, electric, low-alloyed | APOS, U.
- Transportation: use trucks Euro6 instead of Euro5, through the Ecoinvent string: Transport, freight, lorry 16-32 metric ton, EURO6 {RER}| transport, freight, lorry 16-32 metric ton, EURO6 | APOS, U.

Results of the sensitivity run presented in the characterization format.

Impact category	Unit	Total	NITROGEN FREEZING	SHEATH	DRILLING AND PIPES	MATERIAL AND EQUIPMENT TRANSPORTATION
Climate change	kg CO2 eq	10061,02892	414,17319	1531,07391	7931,48909	184,29274
Ozone depletion	kg CFC11 eq	0,00139	0,00004	0,00006	0,00125	0,00004
Ionising radiation	kBq U-235 eq	1323,91889	231,73893	69,00812	1011,51461	11,65723
Photochemical ozone formation	kg NMVOC eq	42,47470	0,93305	2,86763	38,43457	0,23946
Particulate matter	disease inc.	0,00057	0,00001	0,00002	0,00054	0,00001
Human toxicity, non-cancer	CTUh	0,00079	0,00000	0,00001	0,00077	0,00000
Human toxicity, cancer	CTUh	0,00003	0,00000	0,00000	0,00003	0,00000
Acidification	mol H+ eq	46,15744	2,24961	3,75981	39,78114	0,36688
Eutrophication, freshwater	kg P eq	3,14901	0,41153	0,34238	2,39377	0,00134
Eutrophication, marine	kg N eq	13,52445	0,40070	1,12527	11,93737	0,06112
Eutrophication, terrestrial	mol N eq	139,29496	3,50403	11,74604	123,36525	0,67965
Ecotoxicity, freshwater	CTUe	117535,74881	4376,15989	8933,40069	103164,28109	1061,90714
Land use	Pt	284353,19987	5799,40732	11757,37465	266731,28950	65,12839
Water use	m3 depriv.	4019,49971	756,07622	390,85179	2872,87745	-0,30575
Resource use, fossils	MJ	140064,39038	8708,35941	6681,00975	122064,90545	2610,11576
Resource use, minerals and metals	kg Sb eq	0,35424	0,00076	0,00063	0,35283	0,00002
Climate change - Fossil	kg CO2 eq	10033,76532	412,01282	1527,76029	7909,71079	184,28142
Climate change - Biogenic	kg CO2 eq	17,26840	1,05483	2,14791	14,05626	0,00940
Climate change - Land use and LU change	kg CO2 eq	9,99520	1,10554	1,16570	7,72204	0,00192

Tab. 18-26, Artificial ground freezing with nitrogen technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.

Here it follows on the left the table including the quantity of materials and energy necessary for the studied process, on the right, table with comparison between the baseline and sensitivity analysis outcomes. A 4% cut-off value has been applied to the weighted score.

Material/Consumption	Quantity	Unit	Impact category	Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	2111	kg	Climate change	18,91%	10061,02893	12081,53160	kg CO2 eq	-16,72%
Energy-Electricity	61,6	kWh	Ozone depletion	0,00%	0,00139	0,00165	kg CFC11 eq	-15,86%

Energy-Diesel	3240	kWh	Ionising radiation	0,00%	1323,91889	2020,55653	kBq U-235 eq	-34,48%
Steel	3001	kg	Photochemical ozone formation	0,00%	42,47470	50,96231	kg NMVOC eq	-16,65%
T.A.M.	0	kg	Particulate matter	6,24%	0,00057	0,00084	disease inc.	-31,59%
Bentonite	192	kg	Human toxicity, non-cancer	4,57%	0,00079	0,00229	CTUh	-65,58%
Nitrogen	1778,1	kg	Human toxicity, cancer	0,00%	0,00003	0,00008	CTUh	-58,58%
Nitrogen waste	1778,1	kg	Acidification	0,00%	46,15744	57,45410	mol H+ eq	-19,66%
Brine waste	0	kg	Eutrophication, freshwater	0,00%	3,14901	4,46386	kg P eq	-29,46%
Sludge waste	0	m3	Eutrophication, marine	0,00%	13,52445	16,08678	kg N eq	-15,93%
Water	4094	kg	Eutrophication, terrestrial	0,00%	139,29496	167,50348	mol N eq	-16,84%
			Ecotoxicity, freshwater	0,00%	117535,74884	145972,33367	CTUe	-19,48%
			Land use	0,00%	284353,19957	322307,70154	Pt	-11,78%
			Water use	0,00%	4019,49973	5710,29778	m3 depriv.	-29,61%
			Resource use, fossils	12,95%	140064,39123	175307,43707	MJ	-20,10%
			Resource use, minerals and metals	30,36%	0,35424	0,42718	kg Sb eq	-17,07%

Tab. 18-27, Artificial ground freezing with nitrogen technique: sensitivity analysis vs. baseline, total impact indicators, characterization.

18.7 Comparison of the treatments' performances

The LCA assessments provide an environmental assessment of each approach and the comparative performance, from the perspective of several environmental effect categories, of each type of treatment.

The representation of the data is conducted based on the baseline analysis as a point of reference.

The first graph illustrates the comparison of impact performance within each category of the Environmental Footprint Framework. Jet grouting techniques are of significant importance in all areas of impact, whilst the remaining three techniques contribute to various effect categories; remarkable the energy consumption influence for the freezing technology.

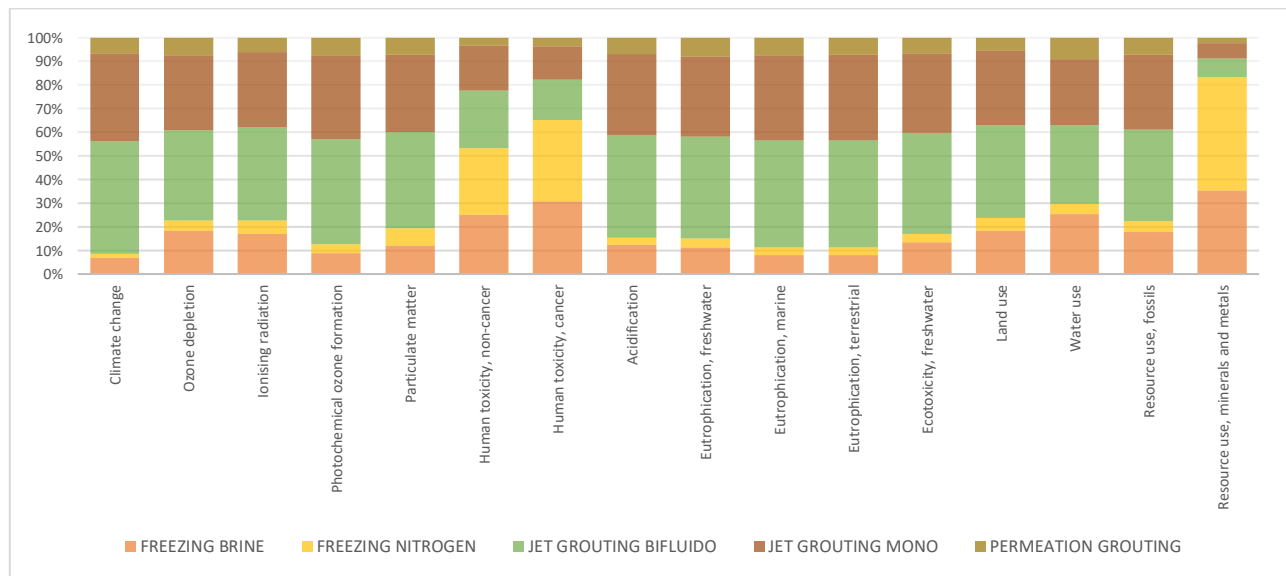


Fig. 18-29, Case studies techniques comparison: impact, characterization view.

In the subsequent normalized diagram, gives more evidence to what stated above Jet grouting techniques dominate impact for climate change, and those typical of the concrete industry.

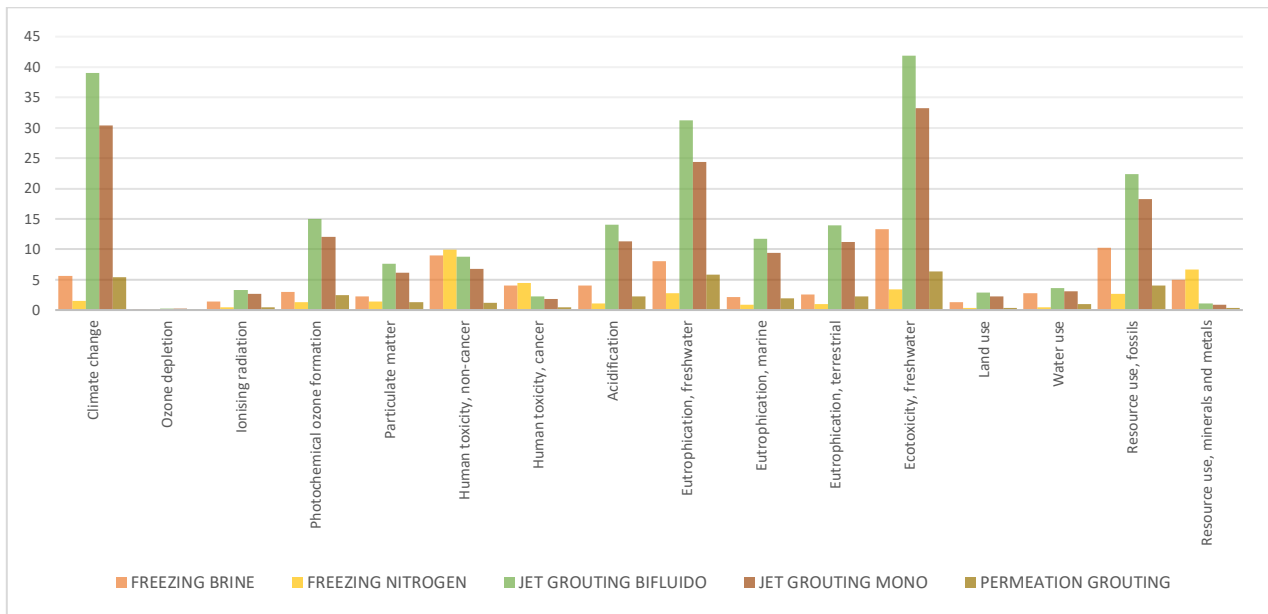


Fig. 18-30, Case studies techniques comparison: impact, normalized view.

The weighted view confirms the conclusions that have been drawn from the normalized view.

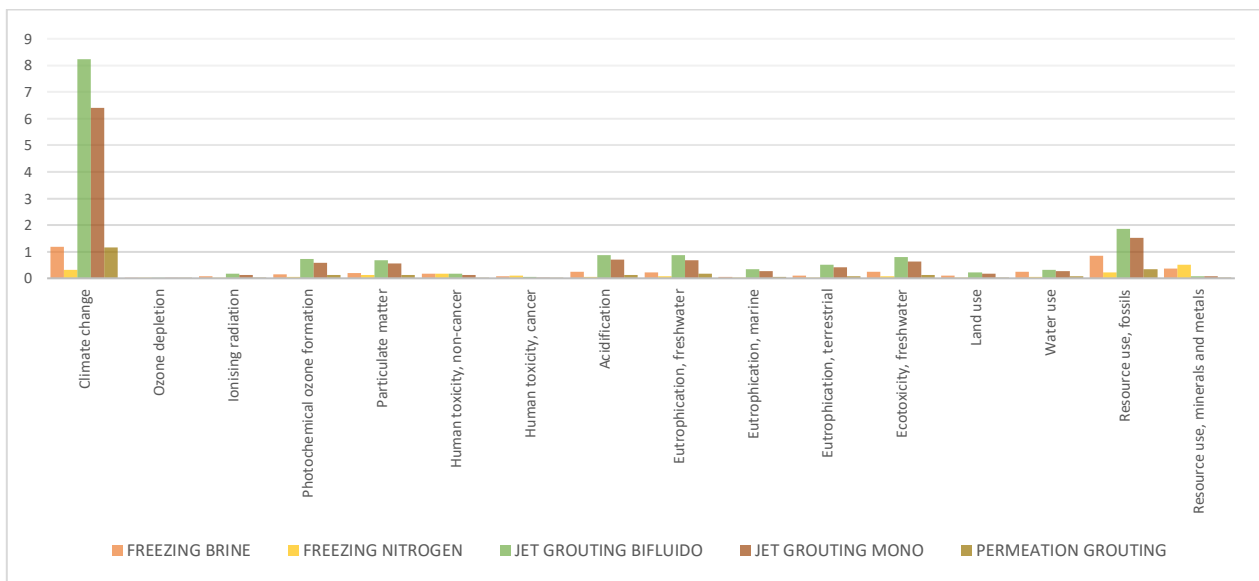


Fig. 18-31, Case studies techniques comparison: impact, weighted view.

The use of a single point representation now allows for a comprehensive assessment of the environmental efficacy exhibited by the five different treatment approaches. The performance disparities across technologies may be attributed to several factors such as climate change-induced impacts, resource depletion, air quality and human toxicity, and water consumption and depletion. This perspective allows for a quantitative assessment of these causes and presents relevant opportunities for potential enhancements.



Fig. 18-32, Case studies techniques comparison: impact, single point/score view.

By comparing the total scores of the five case studies, it emerges that the nitrogen-freezing process is the one that impacts the less. This is mainly due to the role played by climate change, resource depletion, and water impacts induced by cement production and use. The grout effect in permeation grouting is compensated (when compared to brine freezing) by the material and energy relevance of the ‘freezing’ effort needed to keep brine in circulation. Finally, jet grouting, representing a solid and effective treatment, pays a high sustainability penalty due to the significant need for energy and grout cement-based mix.

The following table allows for the comparison between the different techniques: the heat map highlights (in red) the highest values for the quantitative KPIs of each impact category and confirms the above evaluations.

Impact category	Unit	PERMEATION GROUTING	JET GROUTING SINGLE FLUID	JET GROUTING DOUBLE FLUID	FREEZING BRINE	FREEZING NITROGEN
Climate change	kg CO2 eq	44162,18116	246215,44830	316196,39990	45377,18269	12081,53161
Ozone depletion	kg CFC11 eq	0,00279	0,01183	0,01422	0,00685	0,00165
Ionising radiation	kBq U-235 eq	2115,31387	11200,80211	13923,23464	5918,79626	2020,55654
Photochemical ozone formation	kg NMVOC eq	100,18710	488,39035	608,09381	122,45663	50,96231
Particulate matter	disease inc.	0,00080	0,00364	0,00452	0,00133	0,00084
Human toxicity, non-cancer	CTUh	0,00027	0,00155	0,00201	0,00206	0,00229
Human toxicity, cancer	CTUh	0,00001	0,00003	0,00004	0,00007	0,00008
Acidification	mol H+ eq	122,69145	627,28454	781,53838	221,86829	57,45410
Eutrophication, freshwater	kg P eq	9,42141	39,20071	50,10546	12,98632	4,46386
Eutrophication, marine	kg N eq	37,41535	182,96914	229,02614	41,12721	16,08678
Eutrophication, terrestrial	mol N eq	393,50655	1976,13326	2471,45650	443,28549	167,50348
Ecotoxicity, freshwater	CTUe	273202,00878	1417097,26782	1786505,06989	567979,18605	145972,33367
Land use	Pt	323969,19188	1864116,81548	2318539,97682	1073906,92763	322307,70222
Water use	m3 depriv.	11477,57963	35047,85458	41721,04968	31698,83055	5710,29780
Resource use, fossils	MJ	264587,27406	1189666,35757	1452697,14610	667564,16087	175307,43694
Resource use, minerals and metals	kg Sb eq	0,02053	0,05804	0,06998	0,31618	0,42718
Climate change - Fossil	kg CO2 eq	44070,27949	245697,90639	315550,19110	45124,85995	12045,89053
Climate change - Biogenic	kg CO2 eq	60,92449	337,16252	413,95098	209,80594	23,22929
Climate change - Land use and LU change	kg CO2 eq	30,97718	180,37939	232,25781	42,51680	12,41178

Tab. 18-28, Case studies techniques comparison: impact, characterization values.

19 Appendix 3 - The framework scoring refinement (Step 3 of the method)

With the quantitative data developed in the previous chapter, the third step of the proposed three-phased method can be performed. The score evaluation of each sustainability indicator (within the framework Envision/DNSH) is assessed and discussed.

19.1 Permeation grouting assessment refinement

This is the closing phase, where the aim is to put all the contributions together and review the Envision framework results. The following table summarized the results of the LCA baseline and sensitivity runs. The major material and energy flows are also reported.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
			Climate change	44,89%	36927,3063	44162,18116	kg CO2 eq	-16,38%
Cement	42751	kg	Ozone depletion	0,00%	0,00251736	0,002792854	kg CFC11 eq	-9,86%
Energy-Electricity	2995	kWh	Ionising radiation	0,00%	1824,891663	2115,313875	kBq U-235 eq	-13,73%
Energy-Diesel	3200	kWh	Photochemical ozone formation	4,77%	86,75967776	100,1871036	kg NMVOC eq	-13,40%
Steel	0	kg	Particulate matter	5,03%	0,000714601	0,000796777	disease inc.	-10,31%
T.A.M.	320	kg	Human toxicity, non-cancer	0,00%	0,000229547	0,000273693	CTUh	-16,13%
Sludge waste	6.36	m3	Human toxicity, cancer	0,00%	7,50983E-06	8,23528E-06	CTUh	-8,81%
Water	105900	kg	Acidification	5,46%	104,6875206	122,6914512	mol H+ eq	-14,67%
			Eutrophication, freshwater	7,09%	8,701845279	9,421410615	kg P eq	-7,64%
			Eutrophication, marine	0,00%	32,5224058	37,41534811	kg N eq	-13,08%
			Eutrophication, terrestrial	0,00%	338,0142282	393,5065501	mol N eq	-14,10%
			Ecotoxicity, freshwater	4,76%	226507,5325	273202,0088	CTUe	-17,09%
			Land use	0,00%	261138,5881	323969,1919	Pt	-19,39%
			Water use	0,00%	10677,62947	11477,57963	m3 depriv.	-6,97%
			Resource use, fossils	13,99%	233873,1103	264587,2741	MJ	-11,61%
			<i>Resource use, minerals and metals</i>	<i>0,00%</i>	<i>0,01885969</i>	<i>0,02053427</i>	<i>kg Sb eq</i>	<i>-</i>
					<i>3</i>	<i>9</i>		<i>8,16%</i>

Tab. 19-1, Permeation grouting technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity.

Permeation grouting assessment refinement based on the LCA analyses performed

This is the assessment of the evaluations of phase one.

- **LD3.3 Conduct a Life-Cycle Economic Evaluation (estimated 50%).**
 - The requirement from Envision asks that a life-cycle cost analysis (LCCA) is conducted on the whole project to identify the total economic impacts of the project and LCCA is used to compare and assess alternatives for at least one major design component.
- **RA1.1 Support Sustainable Procurement Practices (estimated 100%).**
 - Thanks to the analysis performed, it is possible to identify the environmental performance of each of the project materials, supplies, equipment and check whether they meet the sustainable procurement policy/program requirements. There are two levels of impact to be taken into account: (a) the relevance of the project in itself from gate to site, where the machinery on site is responsible for a 13.6% of impact (with 4.4% belonging to climate change, 3.3% to fossil resource use and 1.5% to particulate matter) and (b) the level of the products (cement mainly) that account for a 83.3% (with 40.8 % belonging to climate change, 9.6% to fossil resource use, 8% to water eutrophication and acidification and 3.1% to particulate matter), while less is due to transportation (1.1% impact overall). In this case, the design should require for cement mixtures different than Portland (pozzolanic, fly ash based etc. or clinker production with reduced energy consumption) and for contractors that ensure transportation fed with

biofuel or machinery operated with electric power. Considering that the use of ‘green’ cement is already becoming a relatively common practice and that the grout mix provides for more than 50% of the impactful products, the score given to this credit is confirmed.

- **RA1.2 Use Recycled Materials (estimated 56%).**
 - To be able to reach at least 25% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is again cement and grout in general. A concrete with recycled aggregates should be procured (for example using aggregates coming from recycling processes like steel mills secondary products, aggregated coming from demolition of concrete items, etc.). Another option is given by TAMs that can be made of recycled steel or plastics. Provided that these options are implemented, the score can be confirmed.
- **RA2.2 Reduce Construction Energy Consumption (estimated 67%).**
 - To reach the target of requiring/implementing at least four (4) energy reduction strategies, these are the design choices that can be made: chose cement coming from a green supply chain, use truck EURO6 or more, use machinery for mixing powered by electricity, chose recycled aggregates for concrete. The score is confirmed.
- **RA2.3 Use Renewable Energy (estimated 63%).**
 - To ensure that the project meets 50% of energy needs (electricity and fuel) from renewable sources, there are three possibilities: (a) cement comes from a supply chain that uses renewable energy or low content of clinker, (b) the sitework uses electric power and choses a provider for electricity that has a 50% of renewable sources, (c) the transportation is fueled with biofuels. Provided that these options are implemented, the score can be confirmed.
- **CR1.1 Reduce Net Embodied Carbon (estimated 75%).**
 - The requirement here is that the project team demonstrates at least a 30% reduction in total embodied carbon of materials over the life of the project compared to the baseline. In this case, again, cement and aggregates are the leverages. One more possibility comes from the TAM that could come from recycled plastics. Provided that these options are implemented, the score can be confirmed, nevertheless the assessment performed considering cement with less clinker, energy coming from renewable sources shows a benefit of no more than 16% in CO₂eq reduction. For this reason, the score is downgraded to 10 (50%). More could be done with deeper/better information about the real case.
- **CR1.2 Reduce Greenhouse Gas Emissions (estimated 69%).**
 - To reach the score, the project team must demonstrate at least a 25% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The LCA calculation could provide this information because of the use of green cements and aggregates. The impact of cement on climate change using ‘green’ cement should be reduced significantly, still the quantification of this reduction is difficult to do. This team is carrying on further analyses in order to catch the needed information from EPD declaration of cement and concrete producers. This means that, to date, the project does not allow for such a reduction and the score needs to be reduced. To the same conclusion comes the assessment evaluation mentioned before, that points to 16% CO₂eq reduction. Scaling back one step means that this goes to 8 and the percentage to 31%.
- **LD1.4 Pursue Byproduct Synergies (estimated 33%).**
 - This indicator requires that candidates for byproduct synergies or reuse are identified. This can include finding a beneficial reuse for the project’s waste or excess resources, or the project’s beneficial reuse of external waste or excess resources. Project teams should also consider ecosystem services where project waste or excess resources can support natural systems, or where natural systems can process and remove project waste. The design and the

LCA show that the only waste produced is sludge coming from the injection process. This sludge is supposed to be collected and dried (with a portable filter press system. The liquid part is then purified (directly on site or transported to a water treatment facility) and the dry part reused as construction filling material. The score is confirmed, because analysis has been performed and at least one byproduct is identified and used.

- **RA1.4 Reduce Construction Waste (estimated 44%).**
 - In this case, the project team has to set a target goal for construction waste diversion: during construction at least 50% of waste materials are recycled, reused, and/or salvaged. Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse. As said for the previous indicator, the main waste product is sludge, and collection and recycling are possible. It has also to be considered that TAM in themselves will stay in the ground after the injection; if self-degrading bio plastics is used (see for instance SIREG Durvinil Biosystem, where a high rate of biodegradation is expected), this can be considered as a waste reduction measure and the score can be confirmed.
- **RA3.3 Reduce Construction Water Consumption (estimated 38%).**
 - To provide for at least one potable water conservation strategy to be implemented the use of grey water should be required during the mixing and the injection phases.

As a conclusion of this assessment conducted after the LCA analysis, only two scores had to be revised (CR.1.2 and CR.1.2)) and the overall scoring goes to 94/232 (41%), that still ranges high (gold rating).

Envision vs DNSH final ratings for the permeation grouting case.

Following the previous discussions on the relationship between the Envision indicators and the DNSH criteria requirements, we created a conceptual framework for ground improvement techniques that’s creates a correspondence between the indicators and the requirements. Based on this approach, we associated the rating score proposed by Envision to the DNSH requirements. This provides a ‘quantitative’ and ‘numerical’ evaluation of the DNSH requirements.

Based on these premises, the following table summarizes and compares the results obtained after the refinement of the permeation grouting assessment. In order to provide a synthetic view, the Envision indicators have been grouped following the five main categories. The maximum scoring achievable for Envision is, as said, 232, and the corresponding maximum achievable with DNSH is 348. The performance of the permeation grouting technique is 41% for Envision and 43% for DNSH. Considering that this is obtained through provisions that exceed the baseline of the existing regulations, the evaluation is positive and landed on a ‘gold’ rating for Envision.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Permeation grouting		Scored EU environmental targets Permeation Grouting					
					Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	2	10%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	54	61%	39	0	3	28	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0

Envision	232	43	94	41%	60	0	5	44	25	17
DNSH	348	68	151	43%						

Tab. 19-2, Permeation grouting technique: Envision vs. DNSH revised ratings.

19.2 Single fluid jet grouting assessment refinement

Again, thanks to the LCA just presented in the previous chapter (the baseline and the sensitivity), an assessment of each of the more relevant scores is done and design/construction strategies for a better performance can be identified, in order to refine the design strategy to make it more sustainable. The following table summarizes the main data and compares the performances (in terms of the quantities coming from the life cycle assessment) of the baseline and the sensitivity. The main energy and material flows are reported.

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	323000	kg	Climate change	0,00%	243865,88401	297937,36176	kg CO2 eq	-18,15%
Energy-Electricity	16497	kWh	Ozone depletion	0,00%	0,01146	0,01348	kg CFC11 eq	-15,02%
Energy-Diesel	2516	kWh	Ionising radiation	4,52%	10917,13489	13043,89158	kBq U-235 eq	-16,30%
Steel	0	kg	Photochemical ozone formation	4,34%	474,33955	578,32742	kg NMVOC eq	-17,98%
T.A.M.	0	kg	Particulate matter	0,00%	0,00356	0,00419	disease inc.	-15,05%
Sludge waste	214	m3	Human toxicity, non-cancer	0,00%	0,00153	0,00187	CTUh	-17,81%
Water	323000	kg	Human toxicity, cancer	5,50%	0,00003	0,00004	CTUh	-15,03%
			Acidification	5,44%	609,58859	745,56100	mol H+ eq	-18,24%
			Eutrophication, freshwater	0,00%	38,60662	43,87501	kg P eq	-12,01%
			Eutrophication, marine	0,00%	177,78931	215,75604	kg N eq	-17,60%
			Eutrophication, terrestrial	5,05%	1919,40385	2349,61079	mol N eq	-18,31%
			Ecotoxicity, freshwater	0,00%	1388365,93687	1734046,34667	CTUe	-19,93%
			Land use	0,00%	1809977,69765	2269326,77323	Pt	-20,24%
			Water use	11,96%	33285,37621	38826,54247	m3 depriv.	-14,27%
			Resource use, fossils	0,00%	1154790,30521	1379881,30282	MJ	-16,31%
			Resource use, minerals and metals	0,00%	0,05613	0,06825	kg Sb eq	-17,76%

Tab. 19-3, Single fluid jet grouting technique, quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity.

Single fluid jet grouting assessment refinement based on the LCA analyses performed

The following indicator evaluations are reported.

- **LD3.3 Conduct a Life-Cycle Economic Evaluation (estimated 50%).**
 - The requirement from Envision asks that a life-cycle cost analysis (LCCA) is conducted on the whole project to identify the total economic impacts of the project and LCCA is used to compare and assess alternatives for at least one major design component.
- **RA1.1 Support Sustainable Procurement Practices (estimated 100%).**
 - The LCA analysis identifies environmental performance of each of the project materials, supplies, equipment and check whether they meet the sustainable procurement policy/program requirements. The analysis shows the impact roles also at the level of the grout mix preparation subphase. There are two levels of impact to be taken into account: (a) the relevance of the project in itself from gate to site, where the machinery on site is responsible for a 9.5% of impact (primarily driven by 3.2% belonging to climate change and 2.3% to fossil resource use) and (b) the level of the products (cement mainly) that account for a 90.5% (primarily driven by 50.9 % belonging to climate change, 12.1% to fossil resource use), while less is due to transportation (2.5% impact overall) and drilling (1.7% impact overall). Looking a bit

deeper in the grout mix preparation phase, cement accounts for nearly 95% of the impact with little remaining to water on site and turbomixing. It is important to notice that cement hits the top of nearly all the critical impacts, and this tells us that this one is a top offender in the construction world. Particularly in this case, design should require for cement mixtures different than Portland (pozzolanic, fly ash based etc. or clinker production with reduced energy consumption and larger amounts of recycled components) and for contractors that ensure transportation fed with biofuel or machinery operated with electric power. With respect to permeation grouting, the amount of cement used in jet grouting is far more intensive and about five times (more than 300tons) larger than the permeation case. In the end this increases the impactful consequences of this approach, but, considering that the use of ‘green’ cement is already becoming a relatively common practice and that the grout mix provides for more than 50% of the impactful products, the score given to this credit is confirmed.

- ***RA1.2 Use Recycled Materials (estimated 56%).***
 - To be able to reach at least 25% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is again cement and grout (through aggregate) in general (taking into consideration the full cradle to gate perspective). Concrete with recycled aggregates should be procured (for example using aggregates coming from recycling processes like steel mills secondary products, aggregated coming from demolition of concrete items, etc.) and also by avoiding Portland cement (using pozzolanic or fly ash based cement: this alone can give a 10% recycled amount, the remaining 15% can be provided through aggregates, that make more than 50% of a concrete mix).
- ***RA2.3 Use Renewable Energy (estimated 63%).***
 - To ensure that the project meets 30% of energy needs (electricity and fuel) from renewable sources, there are three possibilities that account for about 10% each: (a) cement comes from a supply chain that uses renewable energy or low content of clinker (replaced by fly ash or pozzolana), (b) the sitework uses electric power and chooses a provider for electricity that sources from renewable sources, (c) the transportation is fueled with biofuels. Provided that these options are implemented, the score can be confirmed. The sensitivity analysis has been performed with these assumptions.
- ***CRI.1 Reduce Net Embodied Carbon (estimated 50%).***
 - The requirement here is that the project team demonstrates at least a 15% reduction in total embodied carbon of materials over the life of the project compared to the baseline. In this case, again, cement and aggregates are the leverages. The sensitivity analysis gives a gain of more than 18% in terms of CO₂eq mobilization. Provided that the options for concrete are implemented, the score can be confirmed.
- ***CRI.2 Reduce Greenhouse Gas Emissions (estimated 50%).***
 - To reach the score, the project team must demonstrate at least a 25% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The LCA calculation could provide this information because of the use of green cements and aggregates. The impact of cement on climate change using ‘green’ cement should be reduced significantly, still the quantification of this reduction is difficult to do. This team is carrying on further analyses in order to catch the needed information from EPD declaration of cement and concrete producers. The sensitivity already presented for this case and synthesized in the previous table gives a reduction of about 18% in CO₂eq, starting from the baseline. Scaling back one step means that this goes to 8 and the percentage to 31%.
- ***LD1.4 Pursue Byproduct Synergies (33%).***

- This indicator requires that candidates for byproduct synergies or reuse are identified. This can include finding a beneficial reuse for the project’s waste or excess resources, or the project’s beneficial reuse of external waste or excess resources. Project teams should also consider ecosystem services where project waste or excess resources can support natural systems, or where natural systems can process and remove project waste. The design and the LCA show that the only waste produced is sludge coming from the injection process. This sludge is supposed to be collected and dried (with a portable filter press system. The liquid part is then purified (directly on site or transported to a water treatment facility) and the dry part reused as construction filling material. The score is confirmed, because analysis has been performed and at least one byproduct is identified and used.
- **RA1.4 Reduce Construction Waste (25%).**
 - In this case, the project team has to set a target goal for construction waste diversion: during construction at least 25% of waste materials are recycled, reused, and/or salvaged. Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse. As said, the main waste product is sludge, and collection and recycling are possible and another bold can be obtained using aggregates coming from industrial processes. The score can be confirmed.
- **RA2.2 Reduce Construction Energy Consumption (33%).**
 - To reach the target of requiring/implementing at least four (4) energy reduction strategies, these are the design choices that can be made: chose cement coming from a green supply chain, use truck EURO6 or more, use machinery for mixing powered by electricity, chose recycled aggregates for concrete. The score is confirmed.
- **NW3.5 Protect Soil Health (38%).**
 - After completion, the treated soil behaves as concrete and loses its properties becoming an active element of the infrastructure. When the collection and treatment of sludge is properly done and any spill is avoided, the soil in the surroundings of the excavation could keep its properties and nature. Provided that specific actions in the design are provided this score can be confirmed.

Compared to a maximum reachable of 232 points, this ground improvement process scored 85 points (which means an overall value of 37%), with a score reduction only for CR.1.2. This could be considered an acceptable scoring (rewardable with a ‘silver’ rating following Envision rating scale).

Envision vs DNSH final ratings for the single fluid jet grouting case.

The following table shows the matching between the Envision scoring and the DNSH criteria. It is interesting to notice that OBJ 1 (related to materials and cement use) and OBJ 3 (related to recycling and waste reuse potential) allow better ratings for this specific technology heavily based on cement and energy use.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Single fluid Jet Grouting		Scored EU environmental targets Permeation Grouting					
			Points	%	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	2	10%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	45	51%	32	0	1	25	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0

Envision	232	43	85	37%	53	0	3	41	25	17
	348	68	139	40%						
DNSH										

Tab. 19-4, Single fluid jet grouting technique: Envision vs. DNSH revised ratings.

19.3 Double fluid jet grouting assessment refinement

This technique is similar to the previous one but aims to reducing construction time and schedule by using a more powerful injection devices and larger material quantities. These characteristics are directly reflected in the LCA analysis performance and in the Envision ratings. In the following, we analyze each of the relevant Envision indicators listed in phase one.

The following table summarizes the main data in terms of quantities and KPI impact indicators (for both the baseline analysis and the sensitivity). Again, the main energy and material flows are reported.

Material/Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	425000	kg	Climate change	51,78%	317711,94034	384881,11064	kg CO2 eq	-17,45%
Energy-Electricity	10998	kWh	Ozone depletion	0,00%	0,01432	0,01649	kg CFC11 eq	-13,18%
Energy-Diesel	1050	kWh	Ionising radiation	0,00%	14234,40491	16427,32747	kBq U-235 eq	-13,35%
Steel	0	kg	Photochemical ozone formation	4,33%	587,47960	727,82150	kg NMVOC eq	-19,28%
T.A.M.	0	kg	Particulate matter	4,13%	0,00438	0,00525	disease inc.	-16,66%
Sludge waste	283	m3	Human toxicity, non-cancer	0,00%	0,00202	0,00243	CTUh	-17,18%
Water	425000	kg	Human toxicity, cancer	0,00%	0,00004	0,00004	CTUh	-17,39%
			Acidification	5,43%	776,69851	940,28271	mol H+ eq	-17,40%
			Eutrophication, freshwater	5,57%	51,01587	56,42727	kg P eq	-9,59%
			Eutrophication, marine	0,00%	221,46489	272,64744	kg N eq	-18,77%
			Eutrophication, terrestrial	0,00%	2388,48662	2968,13777	mol N eq	-19,53%
			Ecotoxicity, freshwater	5,13%	1821227,77274	2211604,42657	CTUe	-17,65%
			Land use	0,00%	2401473,86489	2867315,42743	Pt	-16,25%
			Water use	0,00%	44459,07287	47202,39701	m3 depriv.	-5,81%
			Resource use, fossils	11,85%	1477694,64211	1712391,06776	MJ	-13,71%
			Resource use, minerals and metals	0,00%	0,07216	0,08396	kg Sb eq	-14,06%

Tab. 19-5, Double fluid jet grouting technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity analysis.

Double fluid jet grouting assessment refinement based on the LCA analysis performed

The following indicator evaluations are reported.

- **LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).**
 - The requirement from Envision asks that a life-cycle cost analysis (LCCA) is conducted on the whole project to identify the total economic impacts of the project and LCCA is used to compare and assess alternatives for at least one major design component.
- **RA1.1 Support Sustainable Procurement Practices (100%).**
 - Due to the heavy cement consumption (420k kg, compared to 323k kg and 43k kg of the other cases considered so far) and to a similar increase in water use (425k l, 323k l, 106k l), the strategy about sustainability performance should focus in this case on cement and sludge management. To be able to reach at least 25% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, a cement with less clinker and a concrete with recycled aggregates should be procured (for example using cement added with fly ash, pozzolana or similar binders and aggregates coming from recycling processes like steel mills secondary products, aggregated coming from demolition of concrete items, etc.). Provided that these options are implemented, the score can be confirmed.

- ***RA2.3 Use Renewable Energy (63%).***
 - Power use increases due to high injection pressures but overall decreases in this particular case, due to time optimization, major relevance has electricity consumption, compared to diesel consumption. More in detail, 11k kWh are used (compared to 16.5k kWh of the single fluid case and less than 4k kWh for the permeation grouting case). To ensure that the project meets 50% of energy needs (electricity and fuel) from renewable sources, there are three possibilities: (a) cement comes from a supply chain that uses renewable energy or low content of clinker, (b) the sitework uses electric power (particularly for the injection phase) and chooses a provider for electricity that has a 50% of renewable sources, (c) the transportation is fueled with biofuels (and biofuel should be used for the drilling phase where diesel engines are used). All these assumptions have been used in the sensitivity analysis. Provided that these options are implemented, the score can be confirmed.
- ***RA1.2 Use Recycled Materials (38%).***
 - To be able to reach at least 15% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is again cement and grout (through aggregate) in general (taking into consideration the full cradle to gate perspective). Concrete with recycled aggregates should be procured (for example using aggregates coming from recycling processes like steel mills secondary products, aggregated coming from demolition of concrete items, etc.) and also by avoiding Portland cement (using pozzolanic or fly ash-based cement: this alone can give a 10% recycled amount, the remaining 15% can be provided through aggregates, that make more than 50% of a concrete mix). The assumption about this credit is more restrictive with respect to the single fluid case (25% set as target) due to the increase in materials use.
- ***RA1.4 Reduce Construction Waste (25%).***
 - In this case, the project team has to set a target goal for construction waste diversion: during construction at least 25% of waste materials are recycled, reused, and/or salvaged. Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse. As said, the main waste product is sludge, and collection and recycling are possible and another bold can be obtained using aggregates coming from industrial processes. It has to be noted that the amount of sludge is larger than the cases analyzed so far: 283 m³, with respect to 214 m³ for the single fluid technique and less than 6.5 for permeation grouting. The score can be confirmed, even if the treatment effort is higher than the other cases.
- ***NW3.5 Protect Soil Health (38%).***
 - After completion, the treated soil behaves as concrete and loses its properties becoming an active element of the infrastructure. When the collection and treatment of sludge is properly done and any spill is avoided, the soil in the surroundings of the excavation could keep its properties and nature. Provided that specific actions in the design are provided this score can be confirmed.
- ***CR1.1 Reduce Net Embodied Carbon (25%).***
 - The ambition about this target has been realistically set to 5% reduction. This makes sense considering that the amount of CO₂eq is far larger than the other cases (316 ton CO₂eq, compared to 246 tons CO₂eq for the single fluid technique and 44 tons CO₂eq for permeation grouting). In this case, again, cement and aggregates are the leverages. To this aim the sensitivity has been performed and because of the heavy involvement of cement with reduced content of clinker and electricity coming from renewable sources, the reduction of CO₂eq with respect to the baseline is around 17%. The score can be increased to 8 (31%).
- ***CR1.2 Reduce Greenhouse Gas Emissions (31%).***
 - To reach the score, the project team must demonstrate at least a 10% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to

map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The target was already scaled with respect to permeation grouting in order to consider the effects of the more impactful nature of this treatment. The LCA calculation could provide this information because of the use of green cements and aggregates. The impact of cement on climate change using ‘green’ cement should be reduced significantly, still the quantification of this reduction is difficult to do. This team is carrying on further analyses in order to catch the needed information from EPD declaration of cement and concrete producers. The sensitivity carried out using the data available in the Ecoinvent database, sets the optimization with respect to the baseline to about 17%. This confirms the score.

Compared to a maximum reachable of 232 points, this ground improvement process scored 76 points (which means an overall value of 33%). This could be considered a good scoring (rewardable with a ‘silver’ rating following Envision rating scale).

Envision vs DNSH final ratings for the double fluid jet grouting case.

The following table shows the matching between the Envision scoring and the DNSH criteria. As for the previous case, it is interesting to notice that OBJ 1 (related to materials and cement use) and OBJ 3 (related to recycling and waste reuse potential) allow better ratings for this specific technology heavily based on cement and energy use.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Double fluid Jet Grouting		Scored EU environmental targets Permeation Grouting					
			Score	%	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	2	10%	0	0	0	0	0	0
Leadership	32	8	10	31%	0	0	0	3	3	0
Resource Allocation	88	18	39	44%	26	0	1	22	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	20	31%	18	0	0	10	2	0
Envision	232	43	76	33%	47	0	3	35	22	17
DNSH	348	68	124	36%						

Tab. 19-6, Double fluid jet grouting technique: Envision vs DNSH revised ratings.

19.4 Brine ground freezing assessment refinement

The previous three techniques had the ‘grouting’ approach in common: ground improvement was reached through the injection of a concrete matrix within the existing soil, in one case strengthening the existing and in the other two just displacing the existing soil.

The next two treatments act in a very different way. Through a network of pipes, the existing soil (immersed in the water table) is frozen, and its mechanical properties increased temporary, as long as freezing lasts. We can distinguish between the first freezing phase (that requires more energy) and the second freezing phase (that keeps the freezing state going). As a first technique, the use of brine as freezing liquid is presented.

As can be seen at a glance from the table below, material is mainly brine and steel and power play a major role in this technique. The table also shows the outcomes and the comparison from the LCA analyses performed (baseline and sensitivity).

Material/ Consumption	Quantity	Unit		Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	2111	kg	Climate change	28,35%	33378,19348	45377,18315	kg CO2 eq	-26,44%
Energy-Electricity	78278,6	kWh	Ozone depletion	0,00%	0,00507	0,00685	kg CFC11 eq	-25,97%
Energy-Diesel	3240	kWh	Ionising radiation	0,00%	4048,45519	5918,79628	kBq U-235 eq	-31,60%
Steel	5830	kg	Photochemical ozone formation	0,00%	92,56538	122,45663	kg NMVOC eq	-24,41%
T.A.M.	0	kg	Particulate matter	4,60%	0,00094	0,00133	disease inc.	-29,61%
Bentonite	192	kg	Human toxicity, non-cancer	0,00%	0,00077	0,00206	CTUh	-62,60%
Brine waste	4915	kg	Human toxicity, cancer	0,00%	0,00003	0,00007	CTUh	-56,26%
Sludge waste	0	m ³	Acidification	5,88%	161,31599	221,86829	mol H+ eq	-27,29%
Water	4094	0	Eutrophication, freshwater	5,17%	9,08107	12,98632	kg P eq	-30,07%
			Eutrophication, marine	0,00%	31,09725	41,12721	kg N eq	-24,39%
			Eutrophication, terrestrial	0,00%	333,16396	443,28549	mol N eq	-24,84%
			Ecotoxicity, freshwater	6,06%	412217,08182	567979,19438	CTUe	-27,42%
			Land use	0,00%	785600,01874	1073906,93792	Pt	-26,85%
			Water use	5,27%	21746,53226	31698,83098	m ³ depriv.	-31,40%
			Resource use, fossils	20,25%	484622,77241	667564,16608	MJ	-27,40%
			Resource use, minerals and metals	9,56%	0,24683	0,31618	kg Sb eq	-21,93%

Tab. 19-7, Ground freezing with brine technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity analysis.

Brine ground freezing assessment refinement based on the performed LCA analysis

The following indicator evaluations are reported.

- **LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).**
 - The requirement from Envision asks that a life-cycle cost analysis (LCCA) is conducted on the whole project to identify the total economic impacts of the project and LCCA is used to compare and assess alternatives for at least one major design component.
- **RA1.1 Support Sustainable Procurement Practices (100%).**
 - To be able to reach at least 50% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is, in this case, steel. Pipes produced with steel coming from recycling are easy to find and could reasonably fill the whole 100% of the supply, and the sensitivity analysis performed considered steel coming from scrap. The little amount of bentonite and concrete is not relevant to the scope (even if Pozzolana was modelled in the analysis), while the criticality of brine is more about the way the resulting sludge is handled. Provided that these options are implemented, the score can be confirmed.
- **RA2.3 Use Renewable Energy (63%).**
 - To ensure that the project meets 30% of energy needs (electricity and fuel) from renewable sources, there are three possibilities: (a) steel production comes from a supply chain that uses a renewable power mix, (b) the sitework uses electric power and chooses a provider for electricity that has a relevant supply from renewable sources, (c) the drilling while placing the pipe network and transportation are fueled with biofuels. The analysis shows that with 30% of electricity coming from renewable sources, CO₂eq goes from 45.4 CO₂eq tons to 35.4 CO₂eq tons, with a better performance of almost all the other impact indicators. Provided that these options are implemented, the score can be confirmed.
- **RA1.4 Reduce Construction Waste (63%).**
 - In this case, the project team has to set a target goal for construction waste diversion: during construction at least 75% of waste materials are recycled, reused, and/or salvaged. Diversion

may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse. As said for the previous indicator, the main waste product is brine sludge, and collection and recycling are possible. To make the brine suitable for reuse, it is possible to treat it with resins that target the contaminant metals for removal without being exhausted by sodium, thereby removing the unwanted contaminants while preserving the salt concentration in the brine solution (as a potential reuse of it, solutions with a high concentration of salt are known to reduce thermal conductivity, so brine waste is often recycled and reused as a cooling agent for steel heat exchangers in many power plants). The score can be confirmed.

- ***RA2.2 Reduce Construction Energy Consumption (67%).***
 - To reach the target of requiring/implementing at least four (4) energy reduction strategies, these are the design choices that can be made: chose steel coming from a green supply chain (modelled in the sensitivity), use truck EURO6 or more (used in sensitivity), use machinery for mixing powered by electricity (also in the baseline). These assumptions have been implemented in the sensitivity analysis. The score is confirmed.
- ***RA3.3 Reduce Construction Water Consumption (63%).***
 - To provide for at least one potable water conservation strategy to be implemented the use of grey water (strategy one) should be required during the mixing and the injection phases. As an alternative/integrative strategy (the second and third one), potable water should be recovered and reused as 'grey' in the site after grout and brine sludge treatment. As a fourth strategy, stormwater can be collected, stored and use for cleaning purposes in the site. The use of brine freezing as a technique for ground improvement is in itself a water consumption reduction strategy (fifth). The score is confirmed.
- ***CR1.1 Reduce Net Embodied Carbon (75%).***
 - The requirement here is that the project team demonstrates at least a 30% reduction in total embodied carbon of materials over the life of the project compared to the baseline. In this case, acting on energy, materials and transportation allows for a 26% of CO₂eq reduction with respect to the baseline. Considering that some more saving can be obtained fueling transportation with biofuels and improving the performance of the drilling activities (again fueled with diesel engines), the target could be reached.
- ***CR1.2 Reduce Greenhouse Gas Emissions (69%).***
 - To reach the score, the project team must demonstrate at least a 50% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. As per the previous indicator, the level of CO₂eq is reduced of about 26% with respect to the baseline, for this reason the target cannot be reached. The score is downgraded to 13, 50% of the maximum achievable.
- ***LD1.4 Pursue Byproduct Synergies (33%).***
 - This indicator requires that candidates for byproduct synergies or reuse are identified. This can include finding a beneficial reuse for the project's waste or excess resources, or the project's beneficial reuse of external waste or excess resources. Project teams should also consider ecosystem services where project waste or excess resources can support natural systems, or where natural systems can process and remove project waste. The design and the LCA show that the waste produced is sludge coming from brine and the injection process. This sludge is supposed to be collected and dried (with a portable filter press system. The liquid part is then purified (directly on site or transported to a water treatment facility) and the dry part reused as construction filling material. The score is confirmed, because analysis has been performed and at least one byproduct is identified and used.

- **RA1.2 Use Recycled Materials (38%).**
 - To be able to reach at least 25% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is again cement and grout in general. Steel coming from scrap recycling, as said previously, can be used instead of the virgin one. Provided that these options are implemented, the score can be confirmed.
- **NW3.5 Protect Soil Health (38%).**
 - The ground freezing technique is by definition less invasive than grouting injection and soil is completely restored after having been frozen. The score is confirmed.

Compared to a maximum reachable of 232 points, this ground improvement process scored 109 points (which means an overall value of 47%) with the downgrade of CR.1.2. This could be considered a good scoring (rewardable with a ‘gold’ rating following Envision rating scale).

Envision vs DNSH final ratings for the Brine freezing case.

Compared to the other techniques, the picture of ground freezing apparently looks similar, but the blend of the different contributions is decidedly different: materials are less involved, while the impact is provided mainly by energy consumption and nature.

The overall score achieved is better for both Envision and DNSH with respect to the grouting techniques.

ENVISION Indicators by Category	Maximum ENVISION Points Available	Minimum ENVISION Points Available	Score Brine Ground Freezing		Scored EU environmental targets Permeation Grouting					
			Score	Percentage	Climate Change mitigation OBJ 1	Climate Change adaptation OBJ 2	Sustainable use of water and marine resources OBJ 3	Circular economy transition OBJ 4	Pollution prevention OBJ 5	Biodiversity and ecosystem protection OBJ 6
Quality of Life	20	2	5	25%	0	0	0	0	0	0
Leadership	32	8	13	41%	0	0	0	6	6	0
Resource Allocation	88	18	56	64%	42	0	5	28	12	12
Natural World	28	5	5	18%	3	0	2	0	5	5
Climate and Resilience	64	10	30	47%	28	0	0	15	2	0
Envision	232	43	109	47%	73	0	7	49	25	17
DNSH	348	68	171	49%						

Tab. 19-8, Ground freezing with brine technique: Envision vs. DNSH revised ratings.

19.5 Nitrogen freezing ground assessment refinement

The nitrogen based freezing treatment is very similar to the brine type, with the exception for the fluid used that is liquid nitrogen (delivered already liquefied at the site). We can distinguish between the first freezing phase (that requires more energy) and the second freezing phase (that keeps the freezing state going). As a first technique, the use of brine as freezing liquid is presented.

As can be seen at a glance from the table below, material is mainly nitrogen and steel and power plays a minor role in this technique, with respect to the previous one. The table gives an overview of the differences between the baseline and the sensitivity LCA analyses performed. The main energy and material flows are given.

Material/Consumption	Quantity	Unit	Impact category	Weighted single score	Total Sensitivity	Total Baseline	Unit	S/B
Cement	2111	kg	Climate change	18,91%	10061,02893	12081,53160	kg CO2 eq	-16,72%

Energy-Electricity	61,6	kWh	Ozone depletion	0,00%	0,00139	0,00165	kg CFC11 eq	-15,86%
Energy-Diesel	3240	kWh	Ionising radiation	0,00%	1323,91889	2020,55653	kBq U-235 eq	-34,48%
Steel	3001	kg	Photochemical ozone formation	0,00%	42,47470	50,96231	kg NMVOC eq	-16,65%
T.A.M.	0	kg	Particulate matter	6,24%	0,00057	0,00084	disease inc.	-31,59%
Bentonite	192	kg	Human toxicity, non-cancer	4,57%	0,00079	0,00229	CTUh	-65,58%
Nitrogen	1778,1	kg	Human toxicity, cancer	0,00%	0,00003	0,00008	CTUh	-58,58%
Nitrogen waste	1778,1	kg	Acidification	0,00%	46,15744	57,45410	mol H+ eq	-19,66%
Brine waste	0	kg	Eutrophication, freshwater	0,00%	3,14901	4,46386	kg P eq	-29,46%
Sludge waste	0	m ³	Eutrophication, marine	0,00%	13,52445	16,08678	kg N eq	-15,93%
Water	4094	kg	Eutrophication, terrestrial	0,00%	139,29496	167,50348	mol N eq	-16,84%
			Ecotoxicity, freshwater	0,00%	117535,74884	145972,33367	CTUe	-19,48%
			Land use	0,00%	284353,19957	322307,70154	Pt	-11,78%
			Water use	0,00%	4019,49973	5710,29778	m ³ depriv.	-29,61%
			Resource use, fossils	12,95%	140064,39123	175307,43707	MJ	-20,10%
			Resource use, minerals and metals	30,36%	0,35424	0,42718	kg Sb eq	-17,07%

Tab. 19-9, Ground freezing with nitrogen technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity analysis.

Nitrogen ground freezing assessment refinement based on the performed LCA analysis

The following indicator evaluations are reported.

- **LD3.3 Conduct a Life-Cycle Economic Evaluation (50%).**
 - The requirement from Envision asks that a life-cycle cost analysis (LCCA) is conducted on the whole project to identify the total economic impacts of the project and LCCA is used to compare and assess alternatives for at least one major design component.
- **RA1.1 Support Sustainable Procurement Practices (100%).**
 - To be able to reach at least 50% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is, in this case, steel. Pipes produced with steel coming from recycling are easy to find and could reasonably fill the whole 100% of the supply. The little amount of bentonite and concrete is not relevant to the scope, while the criticality of brine is more about the way the resulting sludge is handled. Provided that these options are implemented, the score can be confirmed.
- **RA2.3 Use Renewable Energy (63%).**
 - To ensure that the project meets 30% of energy needs (electricity and fuel) from renewable sources, there are three possibilities: (a) steel production comes from a supply chain that uses a renewable power mix, (b) the sitework uses electric power and chooses a provider for electricity that has a relevant supply from renewable sources, (c) the drilling while placing the pipe network and transportation are fueled with biofuels. These strategies have been implemented in the sensitivity analyses. Provided that these options are implemented, the score can be confirmed.
- **RA1.4 Reduce Construction Waste (63%).**
 - In this case, the project team has to set a target goal for construction waste diversion: during construction at least 75% of waste materials are recycled, reused, and/or salvaged. Diversion may be a combination of waste-reduction measures and sourcing waste to other facilities for recycling or reuse. As said for the previous indicator, the main waste product is sheath sludge, and collection and recycling are possible. The score can be confirmed.

- ***RA2.2 Reduce Construction Energy Consumption (100%).***
 - To reach the target of requiring/implementing at least four (4) energy reduction strategies, these are the design choices that can be made: chose steel coming from a green supply chain, use truck EURO6 or more, use machinery for mixing powered by electricity. These strategies have been implemented in the sensitivity analyses. The score is confirmed.
- ***RA3.3 Reduce Construction Water Consumption (63%).***
 - To provide for at least five potable water conservation strategy to be implemented the use of grey water (strategy one) should be required during the mixing and the injection phases. As an alternative/integrative strategy (the second one), potable water should be recovered and reused as 'grey' in the site after grout sludge treatment. As a third strategy, stormwater can be collected, stored and use for cleaning purposes in the site. The use of nitrogen freezing as a technique for ground improvement is in itself a water consumption reduction strategy (fourth). The technique does not allow for a fifth strategy. The score is downgraded to 3 (38%).
- ***CRI.1 Reduce Net Embodied Carbon (75%).***
 - The requirement here is that the project team demonstrates at least a 30% reduction in total embodied carbon of materials over the life of the project compared to the baseline. In this case, again, cement and aggregates are the leverages. Still, due to the nature of the technique, the main focus is energy and energy use. The sensitivity performed allows for no more that 16% CO₂eq reduction with respect to the baseline (including the use of iron coming from scrap). Therefore, the score has to be downgraded to 10 (50%).
- ***CRI.2 Reduce Greenhouse Gas Emissions (69%).***
 - To reach the score, the project team must demonstrate at least a 50% reduction in total CO₂eq over the operational life of the project compared to the baseline, and the project team has to map and calculate the total annual greenhouse gas emissions of the final project design for reporting purposes. The LCA assessment provides an improvement of about 16% in kg CO₂eq with respect to the baseline. This means that, to date, the project does not allow for such a reduction and the score needs to be reduced. Scaling back one step means that this goes to 8 and the percentage to 31%.
- ***LDI.4 Pursue Byproduct Synergies (33%).***
 - This indicator requires that candidates for byproduct synergies or reuse are identified. This can include finding a beneficial reuse for the project's waste or excess resources, or the project's beneficial reuse of external waste or excess resources. Project teams should also consider ecosystem services where project waste or excess resources can support natural systems, or where natural systems can process and remove project waste. The design and the LCA show that the waste produced is sludge coming from the injection process. This sludge is supposed to be collected and dried (with a portable filter press system. The liquid part is then purified (directly on site or transported to a water treatment facility) and the dry part reused as construction filling material. The score is confirmed, because analysis has been performed and at least one byproduct is identified and used.
- ***RA1.2 Use Recycled Materials (38%).***
 - To be able to reach at least 15% (by weight, volume, or cost) of recycled materials including materials with recycled content and/or reused existing structures or materials, the material to focus on is again cement and grout in general. A concrete with recycled aggregates should be procured (for example using aggregates coming from recycling processes like steel mills secondary products, aggregated coming from demolition of concrete items, etc.). Again, renewables and biofuel could be a chance for improvement. The score can be confirmed.
- ***NW3.5 Protect Soil Health (38%).***

- The ground freezing technique is by definition less invasive than grouting injection and soil is completely restored after having been frozen. The score is confirmed.

Compared to a maximum reachable of 232 points, this ground improvement process scored 101 points (which means an overall value of 44%), with the following actions against the scoring of the indicators: RA.2.2 increased while CR.1.2, CR.1.1, RA3.3 have been decreased. When confirmed by the analyses, this could be considered a good scoring (rewardable with a 'gold' rating following Envision rating scale).

20 Appendix 6: List of symbols and acronyms

AGF	Artificial Ground Freezing
AGF-BR	Artificial Ground Freezing using Brine as coolant
AGF-LN	Artificial Ground Freezing using Liquid Nitrogen as coolant
B	Treatment base
b_{A1}	SA1' application height
b_{A2}	SA2' application height
b_s	SS eccentricity
b_u	SU application height
b_w	Ww eccentricity
CCS	Carbon Capture and Storage
CCU	Carbon Capture and Utilization
CEXT	External costs
CINV	Costs in investment stage
CMAIN	Costs during maintenance
CO ₂ eq	Carbon Dioxide equivalent
COP	Costs during operation
CORPT	Climate, organism, relief, parent material and time
CR _{x.y}	Climate and Resilience Envision Credit
DART	Days away, Restrictions or Transfers
DNHS	Do Not Significant Harm
DPP	Pluriennial Planning Document
E	Soil elastic modulus
EF	Environmental Footprint
EPD	Environmental Product Declaration
ESG	Environmental , Social and Governance assumptions
EU	European Union
g	Treated soil density
GAPI	Green Airport Pavement Index
GHG	Greenhouse Gas
GIN	Grout intensity number

GWP	Global warming potential
H	Treatment height
HDPE	High-density polyethylene
HLEG	High-Level Expert Group on Sustainable Finance
ICMQ	Istituto di Certificazione e Marchio di Qualità - Institute of Certification and Quality Mark (IT)
ILCD	European International Life Cycle Data System
ISO	International Organization for Standardization
ITS	Injection tube system
JG	Jet Grouting
JG-1	Jet Grouting single fluid system
JG-2	Jet Grouting double fluid system
JRC	Joint research center
KPI	Key performance indicator
LCA	Life Cycle Assessment
LCC	Life Cycle Costing
LCCA	Life Cycle Cost Analysis
LCI	Life Cycle Inventory
LCIA	Life Cycle Impact Assessment
LDx.y	Leadership Envision Credit
LED	Light emitting diode
LN	Liquid Nitrogen
LT	Long term
M	Moment
M_{act}	Acting Moment
MIMS	Ministero italiano delle Infrastrutture e della Mobilità Sostenibile - Italian Ministry for Sustainable Infrastructure)
M_{lim}	Limit Moment
N_2O	Nitrous oxide
NH_3	Ammonia
NO_x	Nitrogen oxides
NPV	Net Present Value
NWx.y	Natural World Envision Credit

N _x ,N _y	Axial load
OBJ	Objective (in DNSH criteria)
PG	Permeation Grouting
PM-10	Particulate Matter ≤ 10 mm
PV	Present Value
PVC	Polyvinyl Chloride
q _{lim}	Limit bearing capacity
QL _{x,y}	Quality of Life Envision credit
RA _{x,y}	Resource Allocation Envision Credit
RBM	Raise boring machine
RRF	Recovery and Resilience Facility
RRP	Recovery and Resilience Plan
R _t	Net cash flow at time t
SA1'	Horizontal constant load
SA2'	Horizontal triangular load
SCC	Social cost of carbon
SC-CO ₂	Social cost of carbon dioxide
SC-GHG	Social cost of greenhouse gases
SDGs	Sustainable Development Goals
S-LCA	Social Life Cycle Cost
SMEs	Small and Medium-sized enterprises
SO _x	Sulfate oxides
SS	Underload
ST	Short term
SU	Horizontal water load
T _{act}	Shear force active
TAM	Tube à manchettes
TBM	Tunnel boring machine
T _{Lim}	Shear force Limit
TSC	Technical Screening Criteria
UCS	Unconfined compressive strength

UCT Unconfined compression test

V Shear force

VOC Volatile organic compound

W_s Overload in surface

W_w Treated soil weight

21 Appendix 7: Index of figures

Fig. 1-1, The cradle to grave cycle (Simonen, 2014).....	9
Fig. 1-2, The ideal entry points of sustainability in a construction process.	10
Fig. 2-1, The EU Regulation Objectives (and the Do No Significant Harm criteria).....	16
Fig. 3-1, First set of Envision credits.....	20
Fig. 3-2, Second set of Envision credits.....	20
Fig. 4-1, The linear economy of the Construction Sector (Bonviu, 2014).	23
Fig. 4-2, The Life Cycle Thinking approach (Dalhammar, 2015).	23
Fig. 4-3, The 6-R approach (Nazir, 2017).	24
Fig. 4-4, Life Cycle Thinking, Circularity and Sustainability (Azapagic).	24
Fig. 4-5, Life Cycle Assessment framework (Guinée et al., 2011).	25
Fig. 4-6, An example of process oriented LCA approach (Shillaber et al. 2015).....	30
Fig. 6-1, The Three Phased Method.....	49
Fig. 6-2, The open-air excavation for the case study [Pettinaroli, Susani et al., 2023].....	52
Fig. 6-3, Layout and geotechnical properties of the case study.	53
Fig. 6-4, Overturning verification of the adopted case study.	54
Fig. 6-5, Horizontal sliding verification of the adopted case study (ST Short Term; LT long Term).	54
Fig. 6-6, Bearing capacity verification of the adopted case study (ST Short Term; LT long Term).	55
Fig. 7-1, The main characteristics of the ground improvement technologies considered for the pilot case analysis.....	57
Fig. 7-2, A scheme of a permeation grouting site (Keller).	58
Fig. 7-3, Permeation grouting practice - Left: TAM in correspondence of a manchette, surrounded by the cement-based sheath, into the treated soil (Rodio) – Right: TAM grouting phase on site (Milan Metro Line 4 site – 2019).....	59
Fig. 7-4, A sitework equipment scheme for single and double fluid Jet Grouting technique (Keller). The air compressor is used only in the double fluid system	63
Fig. 7-5, A vertical jet grouted wall (on the right) made with the double fluid system, performed from the crown of a river diversion embankment to protect a hydro power plant construction.....	64
Fig. 7-6, Artificial ground freezing with brine technique: Indirect system circuit scheme (with brine). (Mira Cattò et al. 2016).....	67
Fig. 7-7, Artificial ground freezing with closed system technique (AGF-BR): maintenance stage with brine during the excavation of a railway tunnel for the underpassing of the Isarco River (Brenner Basis Tunnel site – 2021).....	68
Fig. 7-8, Artificial ground freezing with nitrogen technique: direct system circuit scheme. (Mira Cattò et al. 2016).....	68
Fig. 7-9, Artificial ground freezing with open system technique: freezing stage for the excavation of a railway tunnel for the underpassing of the Isarco River. On the left: LN delivery to the site – On the right gaseous nitrogen released by the chimney at the end of the cycle (Brenner Basis Tunnel site – 2021)	69
Fig. 8-1, Permeation grouting technique. Diagram of score contribution vs. each Envision indicator (Maximum achievable and qualitative score).....	71
Fig. 8-2, Single fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator..	72
Fig. 8-3, Double fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.	73
Fig. 8-4, Brine Ground Freezing technique - Diagram of score contribution vs. each Envision indicator.	74
Fig. 8-5, Ground Freezing with Nitrogen technique. Diagram of score contribution vs. each Envision indicator.	75
Fig. 8-6, First Phase Output: The sustainability performance of the five ground improvement techniques under the Envision and the DNSH scoring. A comparison through the radar diagram view.	77

Fig. 8-7, First Phase Output: The sustainability performance of the five ground improvement techniques under the Envision scoring. A comparison for each case and indicator through a bar diagram view.....	77
Fig. 9-1, Key Environmental Impacts during the Life Cycle of Building Materials [Huang, 2020]	80
Fig. 9-2, The Environmental Footprint Framework (Usman, 2022).	81
Fig. 9-3, Permeation grouting treatment: geometrical data.	84
Fig. 9-4, Process scheme for LCA Analysis of the permeation grouting technique.	84
Fig. 9-5, Jet Grouting single fluid technique: geometrical data of the treatment.	86
Fig. 9-6, Process scheme for LCA Analysis of the single fluid Jet Grouting technique.	87
Fig. 9-7, Jet grouting with double fluid technique: geometrical data.	89
Fig. 9-8, Artificial ground freezing technique (AGF-BR and AGF-LN): geometrical data.	91
Fig. 9-9, Artificial ground freezing with brine technique: Process scheme for LCA Analysis.	92
Fig. 9-10, Artificial ground freezing with nitrogen technique: LCA Process scheme.	95
Fig. 9-11, Case studies techniques comparison: impact, characterization view.	97
Fig. 9-12, Case studies techniques comparison: impact, normalized view.	97
Fig. 9-13, Case studies techniques comparison: impact, weighted view.....	98
Fig. 9-14, Jet Grouting with single fluid technique: impact, single point/score view.....	98
Fig. 9-15, Jet grouting with single fluid technique: grout mix preparation focus, impact, single score view.	99
Fig. 9-16, Permeation Grouting technique: impacts, single point view.	99
Fig. 9-17, Artificial ground freezing with brine technique: impact, single score view.	100
Fig. 9-18, Artificial ground freezing with nitrogen technique: impact, single point view.	101
Fig. 9-19- Case studies techniques comparison: impact, single point/score view.	101
Fig. 11-1, Quantitative cost assessment of the different treatment solution analyzed with the pilot case – Main cost classes (For jet grouting cases, drilling is included in the typical technological activity	114
Fig. 11-2, Summary of the main performance indicators of the considered ground improvement techniques	115
Fig. 12-1, The method for SC-GHG evaluation. (USEPA 2021).....	117
Fig. 12-2, Social cost of CO2 emissions, USEPA 2021.	118
Fig. 14-1 Laboratory preliminary test on grouts rheological parameters – on the left Marsh viscosity vs. filter press stability of cement grouts; on the right viscosity vs. groutability time for silica grouts (Pettinaroli et al., 2019).....	129
Fig. 14-2, ITS – Injection Tube System® allows to perform on real scale the permeation grouting treatment process in laboratory (Galli, 2023)	131
Fig. 14-3, ITS ® - left: photogrammetry and laser scanning for determining the treated soil volume – center: grout diffusion in the soil measured by thermometric sensors – treated soil after specimens sampling (Galli, 2023).....	131
Fig. 14-4, Conceptual chart flow of laboratory mixture testing according to the 3-phased method.....	132
Fig. 14-5, GFLab - Ongoing laboratory test on freezing pipe (Bavaresco, 2023)	133
Fig. 17-1, Permeation grouting technique. Diagram of score contribution vs. each Envision indicator (Maximum achievable and qualitative score).....	146
Fig. 17-2, Single fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.	150
Fig. 17-3, Double fluid Jet Grouting technique - Diagram of score contribution vs. each Envision indicator.	154
Fig. 17-4, Brine Ground Freezing technique - Diagram of score contribution vs. each Envision indicator.	158
Fig. 17-5, Ground Freezing with Nitrogen technique. Diagram of score contribution vs. each Envision indicator.....	162
Fig. 18-1, Process scheme for LCA Analysis of the permeation grouting technique.....	168
Fig. 18-2, Permeation grouting technique: impacts, characterization view.....	169
Fig. 18-3, Permeation grouting technique: impacts, normalized view.	169

Fig. 18-4, Permeation grouting technique: impacts, weighted view.170

Fig. 18-5, Permeation Grouting technique: impacts, single point view.170

Fig. 18-6, Permeation Grouting technique: grout mix preparation, impacts, single point view.171

Fig. 18-7, Process scheme for LCA Analysis of the single fluid Jet Grouting technique.176

Fig. 18-8, Jet Grouting with single fluid technique: impact, characterization view.176

Fig. 18-9, Jet Grouting with single fluid technique: impact, normalization view.....177

Fig. 18-10, Jet Grouting with single fluid technology: impact, weighted view.177

Fig. 18-11, Jet Grouting with single fluid technique: impact, single point/score view.178

Fig. 18-12, Jet grouting with single fluid technique: grout mix preparation focus, impact, single score view.179

Fig. 18-13, Process scheme for LCA Analysis of the single fluid Jet Grouting technique.184

Fig. 18-14, Jet grouting with double fluid technique: impact, characterization view.184

Fig. 18-15, Jet grouting with double fluid technique: impact, normalized view.185

Fig. 18-16, Jet grouting with double fluid technique: impact, weighted view.185

Fig. 18-17, Jet grouting with double fluid technique: impact, single score view.186

Fig. 18-18, Jet grouting with double fluid technique: grout mix preparation sub analysis, impact, characterization view.187

Fig. 18-19, Artificial ground freezing with brine technique: Process scheme for LCA Analysis.191

Fig. 18-20, Artificial ground freezing with brine technique: impact, characterization view.191

Fig. 18-21, Artificial ground freezing with brine technique: impact, normalization view.192

Fig. 18-22, Artificial ground freezing with brine technique: impact, weighted view.192

Fig. 18-23, Artificial ground freezing with brine technique: impact, single score view.193

Fig. 18-24, Artificial ground freezing with nitrogen technique: LCA Process scheme.199

Fig. 18-25, Artificial ground freezing with nitrogen technique: impact, characterization view.200

Fig. 18-26, Artificial ground freezing with nitrogen technique: impact, normalized view.200

Fig. 18-27, Artificial ground freezing with nitrogen technique: impact, weighted view.201

Fig. 18-28, Artificial ground freezing with nitrogen technique: impact, single point view.201

Fig. 18-29, Case studies techniques comparison: impact, characterization view.204

Fig. 18-30, Case studies techniques comparison: impact, normalized view.205

Fig. 18-31, Case studies techniques comparison: impact, weighted view.....205

Fig. 18-32, Case studies techniques comparison: impact, single point/score view.....206

22 Appendix 8: Index of tables

Tab. 4-1, Life cycle stages in an LCA according to the European Committee for standardization.	29
Tab. 5-1, Selected indicators for Quality of Life.	39
Tab. 5-2, Selected indicators for Leadership.	41
Tab. 5-3, Selected indicators for Resource Allocation.	43
Tab. 5-4, Selected indicators for Natural World.	45
Tab. 5-5, Selected indicators for Climate and Resilience.	47
Tab. 5-6 - The framework for Ground Improvement Techniques as a construction process.	48
Tab. 6-1, System boundaries according to EN 15804 and EN 15978, cradle-to-gate and cradle-to-site shaded in grey.	50
Tab. 6-2, Reduced frame Envision vs. DNSH for ground improvement techniques.	51
Tab. 8-1, The Envision/DNSH framework evaluation for the case study, maximum available scores.	70
Tab. 8-2, First Phase Output: The sustainability performance of the five-ground improvement technique under the Envision and the DNSH scoring.	76
Tab. 9-1, Standardized steps of LCA according to ISO 14040-44.	81
Tab. 9-2, Case Study Permeation grouting, sensitivity analysis vs. baseline, total impact indicators, characterization.	86
Tab. 9-3, Case Study Jet Grouting Single fluid, sensitivity analysis vs. baseline, total impact indicators, characterization.	89
Tab. 9-4, Jet grouting with double fluid technique: sensitivity analysis vs. baseline, total impact indicators, characterization.	91
Tab. 9-5, Artificial ground freezing with brine technique: sensitivity analysis vs. baseline, total impact indicators, characterization.	94
Tab. 9-6, Artificial ground freezing with nitrogen technique: sensitivity analysis vs. baseline, total impact indicators, characterization.	96
Tab. 9-7, Case studies techniques comparison: impact, characterization values.	102
Tab. 10-1, Permeation grouting technique: Envision vs. DNSH revised ratings.	104
Tab. 10-2, Single fluid jet grouting technique: Envision vs. DNSH revised ratings.	105
Tab. 10-3, Double fluid jet grouting technique: Envision vs. DNSH revised ratings.	106
Tab. 10-4, Ground freezing with brine technique: Envision vs. DNSH revised ratings.	107
Tab. 10-5, Ground freezing with nitrogen technique: Envision vs. DNSH revised ratings.	108
Tab. 10-6, Case studies comparison, impact, characterization values.	109
Tab. 11-1, Cost estimation for the five techniques, focus on the construction processes.	111
Tab. 12-1, Social cost of CO ₂ emissions, different discount rates models (USEPA 2021).	117
Tab. 12-2, Kyoto Gases (IPCC 2021 – 6th Assessment Report Values, GWP)	119
Tab. 12-3, Evaluation of the Social cost of CO ₂ eq emissions based on the LCA analyses performed	120
Tab. 12-4, Overview of the performance for each ground improvement technique	121
Tab. 13-1, Case studies comparison, impacts, percentages per treatment.	123
Tab. 13-2, Summary of the reduction of impact for each category and technique (in p.c.).	124
Tab. 13-3, Overview of the performance for each ground improvement technique technique	124
Tab. 14-1, Classification of equipment and materials used on site for the 5 soil treatment techniques.	130
Tab. 17-1, Permeation Grouting Technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.	148
Tab. 17-2, Single Fluid Jet Grouting technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.	152
Tab. 17-3, Double Fluid Jet Grouting technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.	156

Tab. 17-4, Ground Freezing with Brine technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.	160
Tab. 17-5, Ground Freezing with Nitrogen Freezing technique - The Envision/DNSH framework evaluation for the case study, assigned scores and maximum available scores.	164
Tab. 18-1, LCA analysis input data for permeation grouting.	167
Tab. 18-2, Permeation Grouting technique: impact percentages, single point.	171
Tab. 18-3, Permeation Grouting technique: grout mix preparation, impact percentages, single point.	172
Tab. 18-4, Permeation Grouting technique: grout mix preparation, impact percentages, characterization.	172
Tab. 18-5, Permeation Grouting technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.	173
Tab. 18-6, Case Study Permeation grouting, sensitivity analysis vs. baseline, total impact indicators, characterization.	174
Tab. 18-7, LCA analysis input data for single fluid Jet Grouting.	175
Tab. 18-8, Jet grouting with single fluid technique: impact percentages, single point view.	178
Tab. 18-9, Jet grouting with single fluid technique: impact percentages, characterization.	179
Tab. 18-10, Jet grouting with single fluid technique: impact percentages, single point view, mix preparation phase.	180
Tab. 18-11, Jet Grouting with single fluid technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.	181
Tab. 18-12, Case Study Jet Grouting Single fluid, sensitivity analysis vs. baseline, total impact indicators, characterization.	182
Tab. 18-13, Jet grouting with double fluid technique: LCA analysis input data.	183
Tab. 18-14, Jet grouting with double fluid technique: impact percentages, single point view.	186
Tab. 18-15, Jet grouting with double fluid technique, impact percentages, characterization.	187
Tab. 18-16, Jet grouting with double fluid technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.	188
Tab. 18-17, Jet grouting with double fluid technique: sensitivity analysis vs. baseline, total impact indicators, characterization.	189
Tab. 18-18, Artificial ground freezing with brine technique: LCA analysis input data.	190
Tab. 18-19, Artificial ground freezing with brine technique: impact percentages, single point view.	193
Tab. 18-20, Artificial ground freezing with brine technique: impact percentages, characterization.	194
Tab. 18-21, Artificial ground freezing with brine technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.	195
Tab. 18-22, Artificial ground freezing with brine technique: sensitivity analysis vs. baseline, total impact indicators, characterization.	196
Tab. 18-23, Artificial ground freezing with nitrogen technique: LCA analysis input data for freezing with liquid nitrogen.	199
Tab. 18-24, Artificial ground freezing with nitrogen technique: impact percentages, single point view.	202
Tab. 18-25, Artificial ground freezing with nitrogen technique: impact percentages, characterization.	202
Tab. 18-26, Artificial ground freezing with nitrogen technique: sensitivity analysis based on materials, energy and transportation optimizations, impact indicators, characterization.	203
Tab. 18-27, Artificial ground freezing with nitrogen technique: sensitivity analysis vs. baseline, total impact indicators, characterization.	204
Tab. 18-28, Case studies techniques comparison: impact, characterization values.	206
Tab. 19-1, Permeation grouting technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity.	207
Tab. 19-2, Permeation grouting technique: Envision vs. DNSH revised ratings.	210
Tab. 19-3, Single fluid jet grouting technique, quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity.	210

Tab. 19-4, Single fluid jet grouting technique: Envision vs. DNSH revised ratings.....	213
Tab. 19-5, Double fluid jet grouting technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity analysis.....	213
Tab. 19-6, Double fluid jet grouting technique: Envision vs DNSH revised ratings.....	215
Tab. 19-7, Ground freezing with brine technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity analysis.....	216
Tab. 19-8, Ground freezing with brine technique: Envision vs. DNSH revised ratings.	218
Tab. 19-9, Ground freezing with nitrogen technique: quantities, energy consumptions and LCA results at a glance (single point cutoff below 4%) and sensitivity analysis.....	219